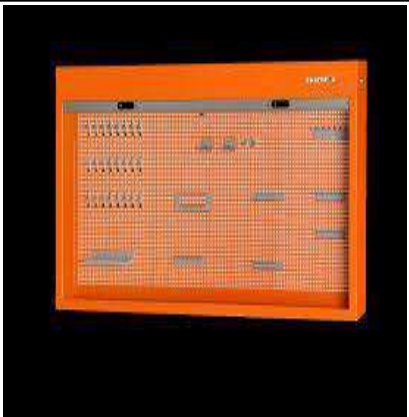


SL NO	DICPRITION	PILOGE CODE	IMAGE
1	PLIERS; TYPE: COMBINATION SLIP JOINT; MODEL NO:PL403A MFR:SNAP-ON; SPECIFICATION: (1 SET= QTY 3 PCS	271121000247	
2	PLIERS; TYPE: INTERCHANGEABLE TIPS; MFR P/N:9938 MFR:BAHCO; LENGTH: 345 MM; SET CONSISTING OF THREE CIRCLIP PLIERS FOR BOTH INTERNAL AND EXTERNAL CIRCLIPS TIPS (STRAIGHT, 15 DEG AND 90 DEG)	271121000236	
3	KIT; TYPE: LONG PRY BAR; OEM P/N:BPBLS4 OEM:BAHCO; WITH RUBBER GRIP (SET CONSISTS OF: BPBL00900, BPBL30900, BPBL70600, BPBL9060), BOX SIZE: 78 X 255 X 1000 MM	311628005772	
4	MULTIPLIER, TORQUE WRENCH DRIVE END SIZE: 92 MM, DRIVE END SHAPE: SQUARE, TORQUE RATING: 160-4000 N M, LENGTH: 277 MM, MATERIAL: HARD STEEL	271117140009	
	STOOL;TYP:CUSHIONED PNEUMATIC ADJUSTABLE WORKSHOP;PN:BLE300 MFR:BAHCO;DMNSN:550 X 380 X 380MM, SEAT MTRL:PU FOAM, MTRL:MS;THREE EASILY ACCESSI BLE DRAWERS FOR STORAGE OF TOOLS, PARTS, ACCES SORIES OR OTHER ITEMS, EQUIPPED WITH A HANDY TRA	561121000119	

	SCREWDRIVER SET; TYPE: INSULATED RATCHETING SCREWDRIVER WITH INTERCHANGEABLE BLADES SET, 6PCS; OEM P/N:808061 OEM:BAHCO; TIP TYPE: SLOTTED, TIP MATERIAL: ALLOY STEEL, TIP SIZE RANGE: PH1, PH2, 0.4 X 2.5, 0.5 X 3.0, 0.8 X 4.0, 1.0 X 5.0 MM, LENGTH RANGE: 122 MM, QUANTITY: 07 NO, HANDLE MATERIAL: 85 X 85 X 218 MM, SPECIAL FEATURES: INSULATED RATCHETING SCREWDRIVER WITH INTERCHANGEABLE BLADES SET, 6PCS, SPECIFICATION: FOR WORK ON LIVE EQUIPMENT, UP TO 1000 V, HIGH QUALITY BLADE INSULATION MOULDED DIRECTLY ONTO THE BLADE, STANDARD: IEC 60900	271117280039	
	SCREWDRIVER SET;OEM PN:706-5 OEM:BAHCO;T SZ RNGE:1.0 X 50, 1.2 X 50, 1.5 X 50, 1.8 X 50, 2.0 X 50, PH0 X 50, PH1 X 75, PZ0 X 50, PZ1 X 75, T6 X	271117280040	
	KNIFE; TYPE: TRADESMAN; MODEL NO:2446-LINO MFR:BAHCO; DIMENSIONS: 180 MM, MATERIAL: SS; FOR LINO CARPETS	271115000128	
	SOCKET, SOCKET WRENCH; TYPE: INSULATED; MFR P/N:28MV-11 MFR:BAHCO; STYLE: 3-LAYER SAFETY COLOUR CODE INSULATION, DRIVE END SHAPE: T-HANDLE, DRIVE SURFACE SIZE: 200 MM 190 MM	271117040284	
	SCREWDRIVER, FLAT TIP; TYPE: INSULATED; MODEL NO:623-4-100 MFR:BAHCO; TIP WIDTH: 4 MM, LENGTH: 180 MM, BLADE MATERIAL: HIGH PERFORMANCE ALLOY STEEL BLADE, BLADE LENGTH: 100 MM, SPECIFICATION: VDE, 3 LAYER, STANDARD: IEC 60900; FOR SLOTTED HEAD SCREWS	271117010120,	

	3 LAYER INSULETED VDE SCREWDRIVER FOR SLOTTED HEAD 125 MM MODEL: 623-5.5-125, MAKE: BAHCO.	271117010121,	
	3 LAYER INSULETED VDE SCREWDRIVER FOR SLOTTED HEAD 260 MM MODEL: 623-6.5-150, MAKE: BAHCO.	-271117010122 ,	
	INSULATED SIDE SCREW ADJUSTABLE WRENCH 12"MODEL: 8073VL,	271117000148,	
	KEY SET, ALLEN; TYPE: INSULATED HEXAGON KEY WRENCH; MFR P/N:1999MV-4 MFR:BAHCO;	271117000187	
	KEY SET, ALLEN; TYPE: INSULATED HEXAHON WRENCH; MFR P/N:1999MV-6 MFR:BAHCO;	271117000189	
	KEY SET, ALLEN; TYPE: INSULATED HEXAHON WRENCH; MFR P/N:1999MV-5 MFR:BAHCO;	271117000188	
	KEY SET, ALLEN; TYPE: INSULATED HEXAGON WRENCH; MFR P/N:1999MV-2.5 MFR:BAHCO; COMMERCIAL SIZE: 2.5 MM, QUANTITY: 1 NO; WITH DIP-COATED INSULATION, FOR WORKING ON LIVE EQUIPMENT UP TO 1000 V ACCORDING TO IEC 60900, CHROME PLATED AND ANTI-CORROSION TREATED FINISH, MADE FROM HIGH-PERFORMANCE ALLOY STEEL, 3 MULTI-LAYER COATING WITH DIFFERENT COLOURS INDICATING SAFETY, DANGER OR HIGH DANGER. PLUS A 4TH ONE IN BLACK TO FURTHER PROTECT HANDLE EDGES, EACH AND EVERY TOOL IS TESTED TO 10 V FOR 10 SECONDS AT THE END OF THE MANUFACTURING CYCLE	271117000191,	
	TOOL; TYPE: LONG PRYBAR; MODEL NO:BPBL30900 MFR:BAHCO; MATERIAL: HIGH STRENGTH CR-MO WITH CHROME	270000000417	

	PLATE FINISH, DIAMETER: 225 MM, WIDTH: 1000 MM; WITH RUBBER GRIP		
	KIT;TYP:HOOK;MN:1495CS-AC1 MFR:BAHCO;APPLN:TOOL MOUNTING	311628007822	
	CABINET; OEM P/N:1495CS18BL OEM:BAHCO; BENCH MOUNT WITH SHUTTER TOOL COMPACT HEAVY-DUTY STRUCTURE, MATERIAL: STEEL STRUCTURE WITH SQUARE HOLE PANEL (THICKNESS: 1 MM), A PROFESSIONAL WAY TO STORE A LOT OF TOOLS IN A LIMITED AMOUNT OF SPACE, DEPTH: 170 MM IS SPACIOUS BUT COMPACT, ROUND LOCK SYSTEM WITH 2 KEYS INCLUDED, PANEL WITH SQUARE 10 MM X 10 MM PATTERN PROVIDING MORE FLEXIBILITY FOR HOOKS	561017000057	
	KIT; TYPE: HOOK; OEM P/N:1495CS-AC1 OEM:BAHCO; FOR CABINET 1495 AND PANEL-35 PCS, INCLUDES 35 DIFFERENT HOOKS, A GOOD BASE FOR MAJORITY OF USERS, WEIGHT-2.11 KG	311628006184	
	WORKBENCH; TYPE: TOP TROLLEY; MODEL NO:1495K6CBKWB18TS MFR:BAHCO; MATERIAL: HEAVY DUTY STEEL; WITH 2 LEGS AND 6 DRAWERS BLACK (SIZE: 1800 X 750 X 1030 MM),THE UNIFORMLY DISTRIBUTED LOAD (UDL) IS 1800 KG FOR EACH STANDARD, THE DRAWER TOWER CAN BE ASSEMBLY IN ANY OF THE SIDES, DRAWER TOWER AVAILABLE IN 6-7-8 DRAWERS EASY ASSEMBLY, INSTRUCTIONS INCLUDED	241020060012	
	KNIFE; TYPE: ROBUST MULTIPURPOSE KNIFE; MODEL NO:2444 MFR:BAHCO; DIMENSIONS: 220 MM, MATERIAL: SOLID SS	271115000127	

	BOOSTER; TYPE: JUMP STARTER; EXHAUST RATING: NO, SUPPLY RATING: 12-24 V DC, APPLICATION: STARTING 12V AND 24V VEHICLE BATTERIES, SPECIFICATION: 2400/1200 CRANKING AMPS 12/24 V POWERFUL AGM BOOSTER, DIRECT POWER: AT 12 V, 2400 CA, AT 24 V: 1200 CA, THE CONNECTOR FOR SELECTING EITHER 12V OR 24 V IS MADE FROM THE MOST ROBUST INDUSTRIAL CONNECTORS ON THE MARKET AND EQUIPPED WITH A VERY COMFORTABLE HANDLE, 50 MM2 COPPER AREA IN CABLES ENSURES HIGH CONDUCTIVITY, EQUIPPED WITH HEAVY DUTY CLAMPS WITH COPPER BRIDGE FOR COMPLETE AMPERAGE TRANSFER THE BATTERY THAT NEEDS BOOSTING, CONVENIENT VOLTMETER FOR EASY CHECKING OF INTERNAL BATTERY STATUS, SAFETY FEATURES: REVERSE POLARITY PROTECTION, INTERNAL FUSE: 500 A, CABLE LENGTH: 1.70 M, SUPPLIED WITH AN AUTOMATIC ELECTRONIC CHARGER		
	WRENCH, IMPACT;TYP:TWIN HAMMER CLUTCH MECHANISM;MN:BP905P MFR:BAHCO;DRV SZ:1IN, DUTY:LIGHT WEIGHT, TRQ RTNG:300-1965N M, SPD:6000RPM	271127130086	
	SOCKET, SOCKET WRENCH; TYPE: INSULATED; MFR P/N:28MV-11 MFR:BAHCO; STYLE: 3-LAYER SAFETY COLOUR CODE INSULATION, DRIVE END SHAPE: T-HANDLE, DRIVE SURFACE SIZE: 200 MM 190 MM 20.5 MM MM, WRENCHING SURFACE SHAPE: ROUND, WRENCHING SURFACE SIZE: 11 MM, MATERIAL: MADE FROM HIGH-PERFORMANCE ALLOY STEEL; 3 MULTI-LAYER COATING WITH DIFFERENT COLOURS INDICATING SAFETY, DANGER OR HIGH DANGER, EACH AND EVERY TOOL IS TESTED TO 10.000V, FOR 10 SECONDS AT THE END OF THE MANUFACTURING CYCLE,	271117040284	

	HIGH-PERFORMANCE ALLOY STEEL, OPENING TOLERANCE ACCORDING TO ISO 691, SPECIFICATION: DIP-COATED INSULATION, 3-LAYER SAFETY COLOUR CODE INSULATION, WORKING ON LIVE EQUIPMENT UP TO 1000 V ACCORDING TO IEC 60900		
	WRENCH, OPEN END; TYPE: SINGLE; MODEL NO:894M-100 MFR:BAHCO; SIZE: 100 MM, LENGTH: 850 MM, MATERIAL: AS, STANDARD: ISO 3318 AND DIN 894	271117060157	
	WRENCH, OPEN END; TYPE: SINGLE; MODEL NO:894M-90 MFR:BAHCO; SIZE: 90 MM, LENGTH: 690 MM, MATERIAL: AS, STANDARD: ISO 3318 AND DIN 894	271117060156	
	WRENCH, OPEN END; MODEL NO:894M-105 MFR:BAHCO; SIZE: 105 MM, LENGTH: 1000 MM, MATERIAL: AS, STANDARD: ISO 3318 AND DIN 894; SINGLE OPEN END WRENCH	271117060158	
	SCREWDRIVER SET; TYPE: POP UP, MODEL NO: SGDQ16KT MFR: SNAPON	271117280010	
	BURR; MFR P/N:A1020S06 MFR:BAHCO; SHAPE: CYLINDRICAL, HEAD SIZE: 9.6 MM, SHANK DIAMETER: 6 MM, MATERIAL: AS, CUT PATTERN: DOUBLE CUT; 1 SET CONSIST OF 5 NOS	232517060247	

	TOOL; TYPE: BORDER CULTIVATORS; MODEL NO:P 274 MFR:BAHCO; MATERIAL: MS, DIAMETER: 50 MM, WIDTH: 470 MM; WITH DUAL COMPONENT HANDLE	270000000401	
	SOCKET, WRENCH; MODEL NO:8900DM MFR:BAHCO; STYLE: BI-HEXAGONAL, DRIVE SIZE: 3/4 IN, DRIVE END SHAPE: SQUARE, SIZE: 33 MM, MATERIAL: HIGH-PERFORMANCE ALLOY STEEL; WITH MATRIC BI-HEX PROFILE	271117530102	
	WRENCH; TYPE: NON-SPARKING VALVE; MODEL NO:NSB204-30 MFR:SNAP-ON; SIZE: 200 MM, MM, MATERIAL: COPPER BERYLLIUM, APPLICATION: POTENTIALLY EXPLOSIVE ENVIRONMENTS, WHERE	271117000272	
	WRENCH; TYPE: NON-SPARKING VALVE; MODEL NO:NSB204-60 MFR:BAHCO; SIZE: 500 MM, MATERIAL: COPPER BERYLLIUM, APPLICATION: POTENTIALLY EXPLOSIVE ENVIRONMENTS, WHERE	271117000275	
	TOOL; TYPE: ONE POINT HOES; MODEL NO:P278 MFR:BAHCO; MATERIAL: MS, DIAMETER: 100 MM, WIDTH: 455 MM; WITH DUAL COMPONENT HANDLE AND LONG METAL ROD	270000000402	

	LIGHT, HEAD; MFR P/N:BFRL11 MFR:BAHCO; LENS COLOR: WHITE, MATERIAL: COMFORT, EXTREMELY DURABLE, LIGHTWEIGHT HEADLAMP(NYLON BELT), WIRE LENGTH: 1 M, WIRE CONNECTION TYPE: TWO PIN, SPECIFICATION: WITH ELASTIC STRAP (260 LM) OPTICAL LENS, 2 DIGITAL LIGHT MODES: LOW BEAM (20 PCT), HIGH BEAM (100 PCT), UNIQUE FINGER SCREW FOR TIGHTENING TILT COMPLETE WITH BATTERIES, WIDE BEAM (1.6 M FROM 1 M DISTANCE), CABLE IN COLD-RESISTANT PVC (DOWN TO -40 DEG C)	251729070085	
	TROLLEY, MECHANICS CREEPER; OEM P/N:BLE302 OEM:BAHCO; WIDTH: 10 MM, HEIGHT: LOW 135 MM, SPECIFICATION: DIA 60 MM, CAPACITY: 136 KG; CREEPER AND STOOL COMBO, HIGH DENSITY FOAM PAD FOR HIGH DURABILITY AND GOOD COMFORT, SIX 360 DEG PP SWIVEL CASTORS	241015080010	
	EXTRACTOR; TYPE: SPIRAL FLUTE SCREW; MODEL NO:EX1A/EX2A/EX3A MFR:BAHCO	271131000027	
	BIT SET; MODEL NO:7823 MFR:BAHCO; BIT SET FOR SLOTTED /PHILLIPS/HER/TORX HEAD SCREWS,SIZE : 45X70X197MM, 12809G, INCLUDES 23 PIECES: 21 BITS, 1 HAND OPERATED IMPACT DRIVER AND 1 BIT HOLDING ADAPTOR, FOR SLOTTED, PHILLIPS, HEXAGONAL,5/16" HEXAGON DRIVE,½" ADAPTOR FOR BITS 5/16" HEXAGON DRIVE	271128000440	

	HAMMER, PNEUMATIC; TYPE: PNEUMATIC HAMMERING MACHINE WITH CHISEL SET; MODEL NO:PH3050BR/PHG11 MFR:SNAP-ON; PRESSURE RATING: 2.5 KG/CM2, SPECIFICATION: BORE DIA: 3/4 IN, PISTON STROKE: 3 IN, AIR INLET THREAD SIZE: 1/4 NPT, SOUND LEVEL DB (A) PRESSURE 91.4, LENGTH: 9 IN, COLOR: GREEN; WITH CHISEL SET (PHG63B, PHG64B, PHG76B, PHG21B, PHG57B, PHG73B, PHG58C, PHG111B, PHG87B, PH201, PHG74B), FOR PROVIDING SAFE WORK AND SMOOTH FUNCTIONING	271315040018	
	DEVICE; TYPE: 2 IN 1 OIL DRAINER; MFR P/N:BOD8903A MFR:BAHCO; WITH TANK (CAPACITY: 90 L) AND INSPECTION CHAMBER WITH MANUAL OIL TRANSFER SYSTEM, FLEXIBLE NYLON: 5 X 700 MM, 6 X 700 MM, 7 X 1000 MM, 8 X 700 MM, RIGID COPPER: 5 X 700 MM, 6 X 700 M, SUCTION AIR PRESSURE: 7-8 BAR/100-115 PSI	230000000215	
	BOX, TOOL; OEM P/N:960100010 OEM:BAHCO; DIMENSIONS: 270 X 210 X 335 MM, MATERIAL: METAL, SPECIFICATION: WEIGHT: 2.45 KG	241124010023	
	BENDER, TUBING;TYP:MANUAL;MN:1084 MFR:BAHCO;DIA RANGE ACCOMDTD:6-10MM	232515050012	

	KIT, REPAIR;TYP:MECHANICAL AND INSULATED TOOL SET;MN:SI13V-M136 MFR:BAHCO	311628004662	
	PLIERS, VISE GRIP; TYPE: SELF GRIP AND WELDING; MFR P/N:2951-300 MFR:BAHCO; JAW OPENING CAPACITY: 4 MM, LENGTH: 300 MM, MATERIAL: ALLOY STEEL, SPECIFICATION: WITH CUTTER	271121120003	
	PLIERS, VISE GRIP; TYPE: SELF GRIP AND WELDING; MFR P/N:2951-180 MFR:BAHCO; JAW OPENING CAPACITY: 2 MM, LENGTH: 190 MM, MATERIAL: ALLOY STEEL, SPECIFICATION: WITH CUTTER Quantity :1 NUMBER	271121120002	
	HANDLE; TYPE: SLIDING-T; MODEL NO:8154-11 MFR:BAHCO; DIMENSIONS: LG 280 MM, MATERIAL: ALLOY STEEL, SPECIFICATION: SQUARE DRIVE: 1/2 IN	311628010470	
	Wrench Combination, Type: Open and Ring End, Size: 1/4", Length: 5 in , MODEL -OEX8B ,MAKE SNAPON	271117130017	
	Wrench Combination, Type: Open and Ring End, Size: 3/8", Length: 6-1/2 in,MODE -OEX12B ,MAKE -SNAPON	271117130014	

	Wrench Combination, Type: Open and Ring End, Size: 1/2", Length: 8 in ,MODE -OEX16B ,MAKE -SNAPON	271117130016	
	Wrench Combination, Type: Open and Ring End, Size: 5/8", Length: 9-1/2 in ,MODE -OEX20B ,MAKE -SNAPON	271117130018	
	Wrench Combination, Type: Open and Ring End, Size: 3/4", Length: 11 in ,MODE -OEX24B ,MAKE -SNAPON	271117130015	
	HAMMER; TYPE: INSULATED NON-REBOUND; MFR P/N:BLPIRH30 MFR:BLUEPOINT; SPECIFICATION: INSULATION UPTO 1000V, STANDARD: EN/IEC 60900	271116020262	
	KIT, TOOL; TYPE: UNIVERSAL AUTOMATIVE; MODEL NO:RTC/27-10D/1/148/AU MFR:GROZ; COMPRISING: 149 PIECE TOOLS, WITH TROLLEY, 149 PIECE AUTOMOTIVE TOOL KIT COMES IN A 7 DRAWER PORTABLE WORKSTATION (S-10D), A VERSATILE SET WITH AN ORGANIZED LAYOUT, MAKES IT CONVENIENT TO FIND TOOL	561017000093	
	Industrial Ecotiles are heavy-duty, interlocking PVC floor tiles designed for factories, warehouses, and commercial spaces. They require no adhesives, can be installed over uneven surfaces without halting operations,7 MM ,MAKE -ECO TILS	301317000165	

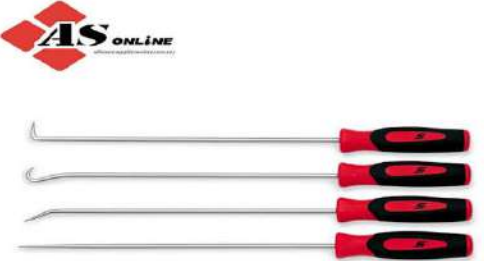
	BAG, TOOL; MFR P/N:4750FB8 MFR:BAHCO; SPECIFICATION: BACKPACK WITH ANTI SLIP PLASTIC HARD BOTTOM	241115070030	
	Bahco 32 L Closed Top Fabric Tool Bags with Rigid Base 4750FB2-19A	241115070031	
	VISOR; TYPE: PAULSON SAFETY SPARE; DIMENSIONS: 559 X 330 X330 MM, MATERIAL: ARAMID FIBER, COLOR: LIGHT GREEN, APPLICATION: ARC FLASH HOOD, SPECIFICATION: ARC RATING: 25 CAL/CM2,UNIVERSAL ROUND CUT U SHAPE DESIGN AT SHOULDER OF BETTER SHOULDER MOVEMENT, ATPV 25 CAL/CM2, NFPA 70E-15 PPE CAT. 4, STANDARD: IEC 61482- 2:2009 & EN ISO 11612:2015 (A1 B2 C2)	461817020064	
	PUMP;TYP:ELECTRIC;MN:EDR/55T/AC/EU MFR:GROZ;FLW RT:18.9L/MIN, TOT HD:2000MM, SPCFCTN:BUILT-IN 2 IN BUNG ADAPTOR, MANUAL DISPENSING NOZZLE WITH 3/4 IN (19 MM) OD STAINLESS STEEL SPOUT, RECHARGEABLE BATTERY: 18.5 V, 1.3 AH LI-LON RECHARGEABLE	401515001589	

	KIT, TOOL; TYPE: UNIVERSAL AUTOMATIVE; MODEL NO: RTC-3027 MFR:GROZ; COMPRISING: 149 PIECE TOOLS, WITH TROLLEY, 149 PIECE AUTOMOTIVE TOOL KIT COMES IN A 7 DRAWER PORTABLE WORKSTATION (S-10D), A VERSATILE SET WITH AN ORGANIZED LAYOUT, MAKES IT CONVENIENT TO FIND TOOL	561017000093	
	TRAY, SPILL; TYPE: FLEXIBLE SPILL CONTAINMENT OIL PORTABLE L -BRACKET BERM; MODEL NO:SB84LB MFR:UDYOGI; WIDTH: 3.9 FT, LENGTH: 7.8 FT, HEIGHT: 0.98 FT, MATERIAL: POLYVINYL CHLORIDE, CAPACITY: 900 L, COLOR: BLACK, SPECIFICATION: THICKNESS: 1.2 MM, TYPE OF BERM: L-BRACKET BERM, NO OF L-BRACKET: 14 PCS	241019070042	
	TRAY, SPILL; TYPE: FLEXIBLE SPILL CONTAINMENT OIL PORTABLE L-BRACKET BERM; MODEL NO:SB4010LB MFR:UDYOGI; WIDTH: 9.84 FT, LENGTH: 39.37 FT, HEIGHT: 0.98 FT, MATERIAL: POLYVINYL CHLORIDE, CAPACITY: 9000 L, COLOR: BLACK, SPECIFICATION: THICKNESS: 1.2 MM, TYPE OF BERM: L-BRACKET BERM, NO OF L-BRACKET: 60 PCS	241019070041	
	STOPPER; TYPE: WHEEL; OEM P/N:PS 806 OEM:POINEER; WITH DIMENSIONS: 500 X 160 X 100 MM	411225000098	
	FLOODLIGHT, ELECTRIC; TYPE: LED, RECHARGEABLE; MODEL NO:30W COB MFR:GROZ; VOLTAGE: 115-220 V, POWER: 30 W	391116110006	

	EXTRACTOR SET; TYPE: STUD; MFR P/N:1418S MFR:BAHCO; FOR BROKEN-OFF SCREWS, BOLTS AND STUDS (M5-M16) INCLUDES GUIDES, DRILL BITS AND EXTRACTORS HIGH-PERFORMANCE ALLOY STEEL, PHOSPHATE FINISH, PLASTIC CASE	271131000020	
	JAW, WRENCH;TYP:SLIDE, INSULATED;WRNCH SZ:150 X 18MM	271117000080	
	RACK; TYPE: REVERSE; MFR P/N:KA389SG15RD MFR:SNAP-ON; MATERIAL: FLEXIBLE POLYMER, SPECIFICATION: 15WR; RING SPANNER AND D-SPANNER ONLY STAND, HANDLE FOR EASY TRANSPORT, EASY TO LOAD AND HOLD WRENCH TIGHT, FITS 2 IN DEEP DRAWERS, HOLES LINE UP WITH WORKCENTER WITH WALLS, COLOUR: RED	311623090080	
	GREASE GUN, PNEUMATIC; TYPE: BATTERY OPERATED; MFR P/N:CGG/20L1/EU MFR:GROZ; CAPACITY: 800 G; SPEED DESIGN-HIGH PRESSURE UPTO 10,000 PSI (690 BAR) , LOW PRESSURE UPTO 7,500 PSI (517 BAR). 2000 MAH LITHIUM ION BATTERY	271129010048	
	COUPLER; TYPE: HYDRAULIC, 4 JAW; OEM P/N:HC/11/4/B OEM:GROZ; SIZE: 1/8 IN, CONNECTION TYPE: BSPT; PRESSURE: 3000 PSI	321015170086	
	COUPLER; TYPE: 4-JAW, MFR P/N: HC/12/4/B MFR: GROZ, SIZE: 1/8 IN, CONNECTION TYPE: BSPT, PRESSURE RATING: 10000 PSI	321015170011	

	PUMP; TYPE: LEVER ACTION BARREL; MFR P/N:LBP/04/PT MFR:GROZ; SPECIFICATION: UPTO 300 ML / STROKE	401515000833	
	VALVE; TYPE: GREASE CONTROL; MFR P/N:APG/HD/Z/1-4F/B MFR:GROZ; SIZE: 1/4 IN, PRESSURE RATING: 690 BAR	401416000652	
	TAPE; TYPE: ANTI SKID; MODEL NO:ASYB260A MFR:UDYOGI; DIMENSIONS: 2 IN X 60 FT, COLOR: YELLOW BLACK	312015000157	
	GREASE GUN, PNEUMATIC;MN:K45R/B MFR:GROZ,CPCTY:1KG,MTRL:RIGID STEEL,OPERATED: MANUAL, PRESSURE RATING: 10000 PSI, WITH FLEXIBLE HOSE, SUCTION FILL	271129010006	
	SPOUT;TYP:FLEXIBLE;MN:MSR/P/F-8 MFR:GROZ;MTRL:TRANSLUCENT POLYETHYLENE;CAPACITY: 8 L	301818070056	
	LIFTER; TYPE: MAGNETIC; MODEL NO:RE2-1178290 MFR:RITA ENGINEERING; DIMENSIONS: WD 82 X LG 117 X HT 90 MM, SPECIFICATION: RE CUSTOMISED ROUND TYPE DIE CAP MOLDING LIFTER ARRANGEMENT CAPACITY: 200 KG, CHAIN LIFTING SIZE: 1.5 MTR WITH D SHACKLE BOTH SIDE , SPRING TYPE HANDLE LOCKING SYSTEM, CHAIN SIZE: 6 MM	311628008326	

	SPOTLIGHT; TYPE: LED WATERPROOF; MODEL NO:LED/402 MFR:GROZ ; MATERIAL: BODY: ABS, GRIP: RUBBER HEAD AND ERGONOMIC TPR	391125010023	 LUMEN 700 RUN TIME 4.5 Hrs
	CLEANER; TYPE: BATTERY; MODEL NO:03176 MFR:CRC; 11 WT OZ, WATER-SOLUBLE FORMULA REMOVES CORROSION, NEUTRALIZES ACID SPILLS, OUTPUT AND REDUCES VOLTAGE LEAKAGE DUE TO CONTAMINANT NET FILL 11 WT OZ, BASE TYPE: AQUEOUS (SIZE: 325 ML)	471318050165	 CRC Battery Cleaner Limpiador de Batería Assures maximum battery current flow Promotes longer battery life Promueve la vida útil de la batería WARNING: DO NOT EXCEED PRESSURE DO NOT USE ON CHILDREN. ADVERTENCIA: NO EXCEDER LA PRESIÓN. NO USAR EN NIÑOS. No. 03176 Net 11.011 / Peso Neto 311g
	PUMP, ROTARY;MN:RB/3H MFR:GROZ;FLW RT:205L/MIN, APPLN:GASOLINE, DIESEL AND KEROSENE	401515210281	
	GREASE GUN, PNEUMATIC; TYPE: BATTERY OPERATED; MFR P/N:CGG/20L1/EU MFR:GROZ; CAPACITY: 800 G; SPEED DESIGN-HIGH PRESSURE UPTO 10,000 PSI (690 BAR) , LOW PRESSURE UPTO 7,500 PSI (517 BAR). 2000 MAH LITHIUM ION BATTERY	271129010048	

	PUMP; TYPE: LEVER ACTION BARREL; MFR P/N:LBP/04/PT MFR:GROZ; SPECIFICATION: UPTO 300 ML / STROKE	401515000833	
	CLEANER; TYPE: ELECTRICAL CONTACT, BRAND P/N: 2-26 BRAND NAME: CRC, STANDARD: NSN 6850-00-874-5847	471318050016	
	TRAY, SPILL; TYPE: DECK; MODEL NO:SP4150 MFR:UDYOGI; WIDTH: 128 CM, LENGTH: 130 CM, HEIGHT: 15 CM, CAPACITY: 2500 KG, SPECIFICATION: CAPACITY: 39 GAL/150L G, DRUM QUANTITY: 4 (CAPACITY: 210 L)	241019070010	
	LONG SMALL SIZE AWLS (HOOKS AND PICKS/SOFT GRIP) Use for scribing, alignment, O-ring removal, piercing holes in leather or fabric, and cleaning crevices. MODEL - SGLASA204CR, MAKE – SNAPON	270000000535	
	COMPOUND; TYPE: BELT LUBRICANT; CONTAINER TYPE: CAN, CONTAINER CAPACITY: 500 ML, PHYSICAL FORM: AEROSOL, SPECIFICATION: BELT GRIP FPS PER FOOD BELT GRIP PROCESSING SAFE ADHESIVE	123500000263	

	COMPOUND; TYPE: WIRE ROPE LUBE LUBRICANT; CONTAINER TYPE:CAN, CONTAINER CAPACITY: 500 G, PHYSICAL FORM: AEROSOL,SPECIFICATION: PROVIDE PROTECTION AND LUBRICATION UNDER WIRE ROPE LUBE ALL OPERATING CONDITIONS	123500000265	
	COMPOUND, CLEANING; TYPE: WATER BASE; BRAND NAME: ECO COMPLEX BLUE FPS, PHYSICAL FORM: LIQUID, COMPOSITION: BIODEGRADABLE PER OECD 301B: 64 PCT, CONTAINER TYPE: GALLON, CONTAINER CAPACITY: 20 L, CRC ECO COMPLEX BLUE SPECIFICATION: NONFLAMMABLE	471318000022	
	PROTECTOR; OEM P/N:1003657 OEM:CRC; BATTERY TERMINAL 7.5 WT OZ, SPECIALLY PROTECT BATTERY TERMINALS FROM CORROSION, PROVIDES A LEAD FREE SOFT PROTECTIVE COATING. NET FILL: 7.5 WT OZ, APPEARANCE: DARK RED VISCOUS LIQUID, SPACE GRAVITY CONCENTRATE: 0.727 (SIZE: 212 G) 1003657	231522042193	

	Solvent cleaner with high flashpoint for heavy contaminants on mechanical parts. Heavy-duty cleaner with a high flashpoint of over 60°C for improved application safety. The extended drying time allows the product to act during a longer period and to dissolve heavy contaminations. Suitable for use in dip baths and ultrasonic dip tanks. LECTRA CLEAN 5 LTR	471318050165	
	FILTER; TYPE: MULTI LAYER; MODEL NO:FL-4 MFR: CRC; FILTRATION SIZE: 50 MICRO, MEDIUM: LIQUID OZZY JUICE (SW-4); IMPREGNATED WITH OZZY MICROBES, 4 WHITE LAYER AND 1 GREEN LAYER, BEARING CLEANING DEGREASING SOLUTION FL-4	401615000285	
	CLEANER; MODEL NO:SW-23 MFR: CRC; CONTAINER CAPACITY: 70 L, PHYSICAL FORM: LIQUID, BRAND NAME: SMART WASHER, STANDARD: CERTIFIED- ETL(UL/CSA), CE, NSF; DIMENSION LG 1092 MM X WD 686 MM X HT 1067 MM, LOAD CAPACITY 180 KG, INSIDE SINK- LG 686 MM X WD 584 MM X HT 203 MM, CONTOL TOGGLE SWITCH, PUMP CAPACITY 19 LTR/MIN, HEAVY DUTY HDPE SW-23	471318050089	
	SOLUTION; TYPE HEAVY DUTY DEGREASING BRAND NAME SWART WASHER PHYSICAL FROM LIQUID STORAGE CODE SW-4	123524000024	

PASTE WITH COPPER PARTICLES FOR HEAVY LOADS AT START-UP SITUATIONS. ALSO ACTS AS ANTI-SEIZE. CONTAINS MICRONIZED COPPER POWDER, ANTIOXIDANT AND ANTI-WEAR ADDITIVES. PREVENTS METAL-TO-METAL CONTACT,SEIZING, GALLING AND FRETTING CORROSION, ESPE-CIALLY ON SLIDING BEARINGS. COPPER PASTE 500 G,	123500000284	
ALLOWS DETECTING LEAKS IN GAS CONDUCTS AND INSTALLATIONS. WATER BASED DETECTOR FOR GASS-ES. MEETS THE REQUIREMENTS OF EN 14291 AND DVGW (DEUTSCHE VEREINIGUNG DES GAS- UND WASSERFACHES) REGISTRATION NUMBER NG-5170AS0069. CRC ECO LEAK FINDER DETECTS GAS LEAKS IN PRESSURIZED PIPE WORK AND PRESSURIZED SYSTEMS. IT FORMS HIGHLY VISIBLE BUBBLES. BIODEGRADABLE ACCORDING TO OECD 301B: 31%, SIZE : AEROSOL 500 ML, (REF-10732) ECO LEAK FINDER	411118090020	

	RUST LOOSENER WITH FREEZE SHOCK EFFECT. THE RUST COOLS DOWN (-40°C) AND CRACKS, LEAVING SMALL FISSURES. OPENINGS AND BLOCKED PARTS ARE SEPARATED EASILY. LOOSENS ALL KINDS OF THREADED PARTS, HINGES AND SLIDING PARTS. FREE OF SILICONES AND ACIDS, SAFE ON ALL METAL SURFACES, SAFE ON MOST RUBBERS, PLASTICS AND COATINGS. PENETRATES QUICKLY. APPEARANCE : LIQUID , COLOR : AMBER, DENSITY: 0.75 G/CM3 (@ 20°C), FLASH POINT : < 0 °C, SIZE : AEROSOL 500 ML, CRC ROST FLASH	123500000281	
	CLEANER; TYPE: ELECTRICAL CONTACT; MODEL NO: CRC-226 MFR: CRC; CONTAINER TYPE: SPRAY BOTTLE, CONTAINER CAPACITY: 500 ML, PHYSICAL FORM: AEROSOL OF NON-FLAMMABLE 2-26	471318050184	
	INHIBITOR, CORROSION; TYPE: WAX COATING; MODEL NO: SP 400 MFR: CRC; PHYSICAL FORM: LIQUID, CONTAINER TYPE: TIN, CONTAINER CAPACITY: 5 L, SPECIAL FEATURES: LONG-TERM OUTDOOR SP 400	121636000045	

	DETERGENT; MODEL NO:BDS002354BU MFR:FERROKLEEN; BRANDNAME: CRC, PHYSICAL FORM: LIQUID, CONTAINER TYPE: CAN,CONTAINER CAPACITY: 20 KG FERROKLEEN	422817040021	
	COMPOUND; TYPE: GASKET REMOVER PRO; CONTAINER TYPE:AEROSOL CAN, CONTAINER CAPACITY: 400 ML, PHYSICAL GASKET REMOVER PRO	123500000283	
	:MULTIPLIER, TORQUE WRENCH;PN:TQM/1-2/3-4/15 MFR:GROZ;DRV END SZ:IN: 1/2, OUT: 3/4IN, DRV END SHP:SQUARE, TRQ RTNG:1500N M	271117140004	
	BAG, TOOL; MFR P/N:NTB/2/84/AU MFR:GROZ; MATERIAL: NYLON, HIGH QUALITY WATER AND ABRASION RESISTANT DENIER POLYESTER, SPECIFICATION: 84 PCS ASSORTMENT IN METRIC SIZE; DOUBLE LAYERED	241115070009	
	METERING GUN, LUBRICANT; MODEL NO:OM-300 MFR:GROZ; MEDIUM: DIESEL, CONNECTION TYPE: BSP, CONNECTION SIZE: 1/2 IN, PRESSURE RATING: 70 BA	27112900000	
	HAMMER, HAND;TYP:CLUB,CAT:CHID/4/16 MFR:GROZ,HD WT:1.8KG,HD MTRL:FORGED STEEL,HNDL LG:16IN	271116020033	

	HAMMER; TYPE: HANDLE SLEDGE; MODEL NO:SHID/6/24 MFR:GROZ; HEAD WEIGHT: 2.7 KG, HEAD MATERIAL: STEEL, HANDLE LENGTH: 600 MM, HANDLE MATERIAL: RUBBER; HEAD TYPE:HEAVY DUTY 52 HRC, INDESTRUCTIBLE HANDLE IS MADE UP OF 4 SPRING STEEL BARS THAT RUN ALL THE WAY THROUGH THE HANDLE	271116020003	
	HAMMER; TYPE: BALL PEIN; MODEL NO:BPID/16/14 MFR:GROZ; HEAD WEIGHT: 450 G, HEAD MATERIAL: FS, HANDLE LENGTH: 350 MM, HANDLE MATERIAL: SPRING STEEL BAR	271116020006	
	HAMMER, HAND; TYPE: BALL PEIN; MFR P/N:BPID/32/14 MFR:GROZ; HANDLE MATERIAL: SPRING STEEL, HANDLE LENGTH: 350 MM	271116020125	
	HAMMER; TYPE: CLUB, CATALOGUE NO: CHID/2.5/12 MFR: GROZ, HEAD WEIGHT: 1.1 KG, HANDLE LENGTH: 12 IN	271116020059	
	HAMMER, HAND; TYPE: BALL PEIN; MODEL NO:BPFG/12/13 MFR:GROZ; HEAD WEIGHT: 340 G, HANDLE MATERIAL: FIBERGLASS, HEAD MATERIAL: FORGED FROM FINE-GRAINED SPECIAL STEEL, HANDLE LENGTH: 330 MM	271116020251	
	HAMMER; TYPE: BALL PEIN; MODEL NO:BPID/16/14 MFR:GROZ; HEAD WEIGHT: 450 G, HEAD MATERIAL: FS, HANDLE LENGTH: 350 MM, HANDLE MATERIAL: SPRING STEEL BAR	271116020006	

	HAMMER; TYPE: CROSS PEIN; OEM P/N:34530 OEM:GROZ, MODEL NO:CPID/2/16; HEAD WEIGHT: 1.15 KG, HEAD MATERIAL: FORGED STEEL, HANDLE LENGTH: 400 MM, SPECIFICATION: GRIP: ERGONOMIC RUBBER, LOCKING PLATE: STEEL, SPRING STEEL BARS (QTY: 4 NO), STANDARD: ANSI	271116020201	
	HAMMER, HAND; TYPE: SLEDGE, CATALOGUE NO: SHID/8/24 MFR: GROZ, HEAD WEIGHT: 3.6 KG, HEAD MATERIAL: FORGED STEEL, HANDLE LENGTH: 24 IN	271116020037	
	HAMMER, HAND;TYP:SLEDGE,CAT:SHID/10/30 MFR:GROZ,HD WT:4.5KG,HD MTRL:FORGED STEEL,HNDL LG:30IN	271116020038	
	HAMMER; TYPE: MACHINISTS BRICK; MODEL NO:MHID/DIN/300G/13OR/S MFR:GROZ; HEAD WEIGHT: 300 GSM, 0.3 KG, HANDLE LENGTH: 13 IN, 330 MM, L2: 12 IN, 300 MM, STANDARD: DIN 1041	271116020116	
	HAMMER; TYPE: BALL PIN INSULATED; OEM P/N:BPIH/16/13 OEM:GROZ; HEAD WEIGHT: 450 G, HANDLE LENGTH: 330 MM	271116020162	
	HAND SLEDGE HAMMER SHID/14/30	271116020009	
	HAMMER; TYPE: HEAVY DUTY SLEDGE; MODEL NO:SHID/8/36 MFR:GROZ; HEAD WEIGHT: 3.6 KG, HANDLE LENGTH: 36 IN, SPECIFICATION: INDESTRUCTIBLE HANDLE	271116020177	

	HAMMER HAND ,TIPY NON SPARKING SLEDGE,MODEL NO - NSB502-4500-FB ,MFR =BAHCO,HANDLE MATEEIAL FIBER GLASS ,HEAD MATERIAL COPPER BERYLLIUM,HANDLE LENGTH 900 MM ,	271116020266	
	HAMMER HAND TYPR ,SLEDGE ,MFR GROZ,MODEL NO -SHID/8/24/CU ,HEAD WEIGHT 8 LBS ,HANDLE MATERIAL ERGONOMIC RUBBER-SPRING STEEL BAR INSERTEO ,HEAD MATERIAL ,COPPER ,HANDLE LENGTH 24 “	271116020264	
	JACK, HYDRAULIC; TYPE: BOTTLE; LOAD CAPACITY:JACK, HYDRAULIC; TYPE: BOTTLE; LOAD CAPACITY: 50 TON; LIFT RANGE: 285-465 MM,)JACK/BT/50	241016120078	
	SPOUT;TYPE:FLEXIBLE; CAPACITY: 5 LITER, Y TRANSLUCENT POLYETHYLENE CONSTRUCTION MSR/P/F-5	301818070055	
	SPOUT;TYPE:FLEXIBLE;MN:MTRL:TRANSLUCENT POLYETHYLENE;CAPACITY: 8 L,	301818070056	
	HOSE, METALLIC; DIAMETER: 1/2 IN, OUTSIDE DIAMETER: 3/4 IN, LENGTH: 15 M, PRESSURE RATING: 300 PSI,HR/AW/15M/1-2/B	401420070187	
	HEXAGONAL SOCKET (DRIVE SIZE : 3/8 IN) SOCKET ; TYPE: HEXAGONAL ; COMMERCIAL SIZE : DRIVE 3/8 IN, WRENCHING SIZE: 10 MM MODEL - SKT/H/3-8/10/UG, MAKE - GROZ	271117040147	
	CABINET, STORAGE; MODEL NO:MTB/12/WD MFR:GROZ; DIMENSIONS: 1067 X 457 X 985 MM; TYPE: PORTABLE WORKSTATION	561015300054	
	TROLLEY;TYP:DRUM,PN:TRL/180H MFR:GROZ	241017060021	

	STRAP, WRENCH;TYP:OIL FILTER;MN:OFW/S/8 MFR:GROZ;MTRL:STEEL, LENGTH:20IN, SZ RNGE:4IN	271121270001	
	PUMP; TYPE: ROTARY BARREL; MODEL NO:V25/3R/SPL/F MFR:GROZ; INLET CONNECTION SIZE: 1 IN; FOR HEATING OILS, MOTOR OILS, LUBRICATING OILS, MATERIAL: CI	401515000669	
	CABINET, STORAGE; MODEL NO:MTB/12/WD MFR:GROZ; DIMENSIONS: 1067 X 457 X 985 MM; TYPE: PORTABLE WORKSTATION	561015300054	
	TROLLEY;TYP:DRUM,PN:TRL/180H MFR:GROZ	241017060021	
	WRENCH,TORQUE;TYP:RATCHET;PN:TQW/AL /3-4/760 MFR:GROZ;DRV SZ:3/4IN, TRQ RNGE:140-760N M, LENGTH:827MM	271117150007	
	WRENCH, TORQUE; TYPE: RATCHET; MFR P/N:TQW/AL/3-4/760 MFR:GROZ; DRIVE SIZE: 3/4 IN, TORQUE RANGE: 140-760 N M, LENGTH: 827 MM	271117150008	
	SOCKET, WRENCH SET;TYP:HEXAGONAL;PN:KIT/SKT/H/1-2/27/UG MFR:GROZ;MTRL:CHROME VANADIUM, SZ RNGE:8-32MM;SQUARE DRIVE, TORQUE RATING: 675 NM	271117290050	
	KIT;TYP:EZEE LUBE, PN:GAK/7 MFR:GROZ, UNIVERSAL	311628001209	

	GAUGE, FEELER;CAT:FLG/20/150 MFR:GROZ;THK RNGE:0.05 TO 1MM, BLDE WD:13MM, BLDE LG:150MM, BLDE QTY:20NO	411116170027	
	KNIFE;MN:KNV/R/6 MFR:GROZ;BELT CUTTING	271115000074	
	COUPLER;TYP:BUTTON HEAD;OEM PN:PCN/1/B OEM:GROZ;SPCFCTN:THREADED 1/8''BSPT(F)	321015170076	
	SCOOP;OEM PN:GSW/1/ST OEM:GROZ;WITH SWIPE	521516360008	
	LUBRICATING GUN, HAND;OEM PN:G2R/B OEM:GROZ;LUBR TYP:LEVER GREASE, DOUBLE PISTON, SPCFCTN:, HIGH OUTPUT GREASING SOLUTION FOR HIGH VOLUME AND FREQUENT GREASING APPLICATIONS, PRESSURE : UPTO 6000 PSI DELIVERS : UPTO 2.4 GM/STROKE COMPLETE WI	271129010041	
	LAMP; TYPE: LED, RECHARGEABLE, MFR P/N: LED 620 MFR: GROZ, POWER: 15 W, VOLTAGE: 220 VAC, 900 LUMENS, RECHARGEABLE LITHIUM ION BATTERY, CAPACITY: 32.6WH, INCLUDES POWER CORD, PORTABLE FREE STANDING HEAVY BASE WITH POWERFUL BASE MAGNET, INGRESS PROTECTION: IP67	391016000206	
	FLASHLIGHT; MFR P/N:LED-401 MFR:GROZ; MATERIAL: AL; LED DRY CELL MULTI-USE WORKLIGHT,18 SUPER BRIGHT LED'S, 28 LUMENS, 6 RED LED'S ON THE SIDE FLASH, FOR SIGNALLING EMERGENCY, ADDITION 7 LED'S ON TOP,18 LUMENS, MAGNET BUILT INTO THE BASE,INCLUDES HANG ROPE, 3 DURACELL AAA BATTERIES INCLUDED	391116100032	

	FLOODLIGHT, ELECTRIC; TYPE: LED, RECHARGEABLE; MODEL NO:30W COB MFR:GROZ; VOLTAGE: 115-220 V, POWER: 30 W	391116110006	
	LIGHT UNIT, PORTABLE; MFR P/N:LED-670T MFR:GROZ; POWER: 30 W; COB RECHARGEABLE WORKLIGHT MOUNTED ON TRIPOD LUMENS:2800, DUEL POWER SOURCE,BATTERY: 7.4V, 4400MAH, LI-ION, VOLTAGE RATING:115V AC, 60HZ/220V AC, STANDARD: CE, FREQUENCY: 50HZ	391120000003	
	ELBOW, HOSE;PN:GBP/6/B MFR:GROZ;MTRL:STEEL, INLET SZ:1/8IN, OUTLET SZ:1/8IN, INLET CNCTN TYP:BSPT, OUTLET CNCTN TYP:BSPT	401417340067	
	FUNNEL; MODEL NO:FNL-9B MFR:GROZ; MATERIAL: POLYETHYLENE	401417350020	
	HOSE ASSEMBLY; TYPE: CRIMPED HYDRAULIC; MFR P/N:HH/2.5/1-2M/1-2M/BSP MFR:GROZ; HOSE SIZE: INNER DIA: 1/2, OUTER DIA: 7/8 IN, LENGTH: 2.5 M, CONNECTION SIZE: 1/2 IN, CONNECTION TYPE: MBSP THREADED, PRESSURE RATING: 150 BAR; FOR GAP	401417640127	
	HOSE ASSEMBLY; MFR P/N:GHC-20/B MFR:GROZ; HOSE SIZE: 8.5 MM, LENGTH: 500 MM, CONNECTION SIZE: 1/8 IN, PRESSURE RATING: 240 BAR	401420000335	

	REEL ASSEMBLY, HOSE;OEM PN:HR/OL/15M/1-2/B OEM:GROZ;SPCFCTN:OIL SIZE: 1/2 IN, LENGTH: 15 MTR, MAX PRESSURE: 2000 PSI;MOUNTING BRACKET	401420220017	
	HOSE, METALLIC; MFR P/N:HR/AW/15M/1-2/B MFR:GROZ; INSIDE DIAMETER: 1/2 IN, OUTSIDE DIAMETER: 3/4 IN, LENGTH: 15 M, PRESSURE RATING: 300 PSI, SPECIFICATION: WITH REEL; CASSETTED SPRING DESIGN, DRIVE SPRINGS ARE MANUFACTURED FROM HIGHEST QUALITY SPRING STEEL, ADJUSTABLE HOSE STOPPER ALLOWS ANY DESIRED LENGTH OF HOSE TO BE MAINTAINED OUT SIDE THE REEL	401420070187	
	PUMP; TYPE: BUCKET GREASER, MFR P/N: BGP/5/A MFR: GROZ, PRESSURE RATING: 4000 PSIG, STANDARD: CE, CAPACITY: 5 KG, WITHOUT WHEEL	401515000104	
	PUMP, RECIPROCATING;TYP:PNEUMATIC GREASE;PN:GPH/3/ST/BSP MFR:GROZ;INLET CNCTN SZ:1/4IN, INLET CNCTN TYP:NPT, OUTLET CNCTN SZ:3/8MM, PRESS RTNG:500BAR, DRVR:AIR MOTOR;RATIO: 50:1	401515090015	
	PUMP, ROTARY; TYPE: BARREL, REFERENCE NO: RB/1H MFR: GROZ, OPERATED : HAND, PROFESSIONAL	401515210050	
	METER;TYP:IN-LINE GREASE;PN:DGM/2/N MFR:GROZ;MEASRMNT RNGE:0.1 TO 2.5 KG/MIN, DISPL TYP:DIGITAL	411100000041	

KEY SET, ALLEN; TYPE: HEXAGONAL; MODE NO:ALN/HX-HX/25/GRZ MFR:GROZ; COMMERCIAL SIZE: 1.5, 2, 2.5, 3, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10 MM, QUANTITY: 25	271117000003	
WRENCH;TYP:SLIM LINE RATCHET HANDLE;PN:RTD/SL/1-2/UG MFR:GROZ;MTRL:CHROME VANADIUM STEEL;DRIVE SIZE: 1/2 IN	271117000090	
SOCKET, WRENCH SET;PN:KIT/SKT/H/3-4/14/MT MFR:GROZ;3/4 DRIVE HEX, SET	271117040050	
BACKPACK, CASUAL;TYP:TOOL BAG;MN:NTB/4 MFR:GROZ;CML SZ:490 X 350 X 430MM, MTRL:NYLON;MULTIPLE POCKETS AND DIVISIONS	531216030005	
BAG, TOOL; MFR P/N:NTB/3 MFR:GROZ; WIDTH: 225 MM, LENGTH: 300 MM, DEPTH: 140 MM, MATERIAL: NYLON	241115070008	
BAG, TOOL;PN:NTB/2/84/AU MFR:GROZ;MTRL:NYLON, HIGH QUALITY WATER AND ABRASION RESISTANT DENIER POLYESTER, SPCFCTN:84 PCS ASSORTMENT IN METRIC SIZE;DOUBLE LAYERE	241115070009	
BOX, TOOL;TYP:5-TRAY CANTILEVER;PN:MTB/5 MFR:GROZ;DMNSN:440 X 200 X 200MM	241124010008	
LIGHT, HEAD; MFR P/N:LED-200 MFR:GROZ; MATERIAL: ABS; POWER RATING:3W, 100 LUMENS, BEAM DISTANCE: 100M, ZOOM: 1X TO 2000, WITH MACHINED ALUMINUM LENS HOLDER, 3 MODES;LOW,HIGH AND FLASH, 3 DURACELL AAA BATTERIES	251729070044	

	GREASE GUN, PNEUMATIC; TYPE: AIR OPERATED; MFR P/N:BGRP/15 MFR:GROZ; CAPACITY: 15 KG	271129010005	
	GREASE GUN, PNEUMATIC;TYP:HAND OPERATED;PN:VGP/15 MFR:GROZ,DWG:VGP/15 OF NA;CPCTY:15KG, DMNSN:NA, MTRL:NA, SPCL FEAT:WHEELS	271129010025	
	KIT, TOOL;TYP:MECHANIC,OEM PN: MTB/5AL/66/AU OEM:GROZ,WITH ALUMINIUM TOOL BOX AND 65 PIECE, HSN CODE NO: 8205	271132000019	
	KIT, TOOL; MFR P/N:KIT/SKT/H/1-4/42/UG MFR:GROZ, REFERENCE NO:40190; HAND SOCKET SET IN BLOW MOULDED CASE	271132000038	
	TAPE, MEASURING LENGTH: 5 M, WIDTH: 19 MM, MATERIAL: NYLON COATED S50C STEEL; TOUGH AND IMPACT RESISTANT ABS/TPR CASING SURVIVES DROPS AND SHOCKS EASILY, AUTO LOCK, MAGNETIC RUBBER HOOK AND BELT HOOK	271118010047	
	PAN;PN:ODP/16/GN MFR:GROZ;FOR ABF OIL DRAIN	521518000028	
	INDICATOR; TYPE: DRUM LEVEL; MFR P/N:DLI/3-4/N MFR:GROZ	411119000178	

	PUMP, FUEL;TYP:CUSTOMIZED AIR OPERATED;MN:OP/T3/SS-HG/GRZ MFR:GROZ;FLW RT:14L/MIN, PRESS RTNG:WORKING: 30-150 PSI, AIR INLET: 150 PSI, SPCL FEAT:AIR CONSUMPTION: 230 LPM, AIR INLET CONNECTION: 1/4 IN FBSP, OUTLET CONNECTION: 1/2 IN FBSP, NO	401515320040	
	WRENCH, TORQUE;TYP:INTER CHANGEABLE HEAD;MN:TQW/DI/1-2/200 MFR:GROZ;DRV SZ:1/2IN, TRQ RNGE:7.4-147.5LB FT, DRV END SHP:SQUARE, LENGTH:580MM, INDCTR TYP:DIGITAL	271117150082	
	:REEL ASSEMBLY, HOSE;OEM PN:HR/HS/15M/1-2/B OEM:GROZ;SPCFCTN:INLET SIZE: 1/2 IN, OUTLET SIZE: 1/2 IN, WORKING PRESSURE: 2000;FOR LUBROOM	401420220039	
	BIT SET;MN:7823 MFR:BAHCO;BIT SET FOR SLOTTED /PHILLIPS/HER/TORX HEAD SCREWS,SIZE : 45X70X197MM, 12809G, INCLUDES 23 PIECES: 21 BITS, 1 HAND OPERATED IMPACT DRIVER AND 1 BIT HOLDING ADAPTOR, FOR SLOTTED, PHILLIPS, HEXAGONAL,5/16" HEXAGON DR	40141736LS63	
	GREASE GUN, PNEUMATIC;MN:GS/5 MFR:GROZ;CPCTY:5KG	271129010047	

	KNIFE;MN:KNV/R/6 MFR:GROZ;BELT CUTTING	271115000074	
	KNIFE; MODEL NO:KNV/5 MFR:GROZ; BELT CUTTING	271115000101	
	GUN, AIR BLOW; TYPE: PNEUMATIC; MFR P/N:LAG/PS/1-4/BSP MFR:GROZ; CONNECTION TYPE: BSP THREAD, CONNECTION SIZE: 1/4 IN	271315020003	
	CLEANER; ANNEXURE: NA OF NA, MODEL NO:SW-37 MFR:CRC; CONTAINER CAPACITY: 100 L, PHYSICAL FORM: LIQUID, BRAND NAME: SMART WASHER, STANDARD: CERTIFIED- ETL(UL/CSA), CE,NSF; DIMENSION: WD 889 X LG 1219 X HT 1143 MM, LOAD CAPACITY: 454 KG, INSIDE SINK SIZE: WD 685 X LG 838 X HT 203 MM, CONTROL TOGGLE SWITCH, PUMP CAPACITY: 19 L/MIN, HEAVY DUTY HDPE	MPM10161968	
	:REEL, CABLE;TYP:AUTO REWIND ARC WELDING;DWG:SBS/AWR-7050 OF BRIGHT INDUSTRIES;WELDING HOLDER (SIZE: 50 MM2 X 1C), CABLE LENGTH: 30 MTR, ALLOWABLE CURRENT: 300 A	261216350010	

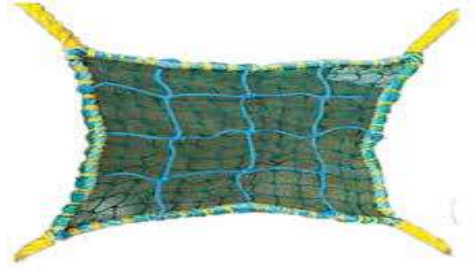
	REEL ASSEMBLY, HOSE; TYPE: AUTO REWIND TWIN GAS; DRAWING: D/SBS/0731 OF BRIGHT INDUSTRIES; MATERIAL: CS WITH POWDER COATED FINISH; HOSE AND HOSE FITTINGS (INNER DIAMETER: 8 MM, WORKING LENGTH: 30 MTR, WORKING PRESSURE: 10 BAR), WITH SWIVEL ROTARY AND MOUNTINGS, RATCHET GEAR LOCKING SYSTEM, INLET CONNECTION: 3/8 IN MBSP THREADED, OUTLET CONNECTION: 3/8 IN FBSP THREADED SWIVEL NUT FITTING	401420220024	
	BARRICADE;TYP:SCISSOR;E:PS-B202 MFR:SUPERB BEARING STORES;MTRL:PLASTIC;HT 1 M, CLOSED LG 300 MM, OPENED LG 2.7 MTR, WITH ONE SIDE PLASTIC WHEELS	MPM10179785	
	ASING; TYPE: FALL ARRESTER BLOCK, MATERIAL: PLASTIC, WIRE ROPE RETRACTABLE PCGS 06 , WITH GALVANISED STEEL CABLE, LENGTH: 6 M, CE MARKED CONFIRMING TO EN:360	312616000026	
	TAPE; TYPE: ANTI SKID; MODEL NO:ASYB260A MFR:UDYOGI; DIMENSIONS: 2 IN X 60 FT, COLOR: YELLOW BLACK	312015000157	
	FACESHIELD, SAFETY; MODEL NO: FC-48 MFR: UDYOGI, DIMENSIONS: 400 X 200 X 1 MM, MATERIAL: PC, WITH FRAME	461817020015	

	ABSORBENT;TYP:UNIVERSAL;OEM PN:ORL120 OEM:UDYOGI;PHYS FRM:ROLL;OIL ONLY ABSORBENT SOCKS,COMPATIBLE WITH OIL & OIL BASED LIQUIDS,ABSORPTION CAPACITY: 120 LI/ROLL, CASE QUANTITY: 1 ROLL, PACKING: 1 ROLL IN POLY BAG, COLOR: WHITE,SIZE: 76 CM X (MODEL - ORL120, MAKE - UDYOGI,)	471319000022	
	BLOWER;TYP:FORCED VENTILATION;MN:VENTIOUT BTF-40 MFR:UDYOGI;AIR FLW CPCTY:7200M3/HR, DIA:400MM, VOLT:240V, PWR:1.1KW;EXPLOSION PROOF ELECTRICAL 16 IN METAL BLOWER WITH 15 M, ANTISTATIC/CONDUCTIVE DUCT FOR CONFINED SPACE USE, WITH DUCT (FL 4 Note To Vendor: Make: UDYOGI	271127010107	
	RAMP;MN:DR 100 MFR:UDYOGI;DMNSN:150 X 1200 X 800MM;HIGH QUALITY UV RESISTANT MATERIAL, RESISTANT TO MOST CHEMICAL, RUST AND CORROSION FREE RAMP	241016150007	
	HARNESS, SAFETY INDUSTRIAL;TYP:LINEMAN BELT;PN:1204057 MFR:3M,DWG:1 OF ELECTRICAL INSULATOR FALL RESTRICTING DEVICE;MTRL:NYLON, WEBG SZ:147CM, BCKL MTRL:ZINC PLATED STEEL, LIFELN WEB TYP:ADJUSTABLE, ATCHMNT MTHD:ROPE, LD CPCTY:141KG, STD:CS	461823060007	
	TRIPOD;TYP:HIGH RISE;MN:210 MFR:UDYOGI;STYL:THREE LEG, DMNSN:WHEELBASE;1000-1500, HEIGHT:1400-2100MM;WITH WINCH, FOR CONFINED SPACE RESCUE ENTRY, LOAD CAPACITY-100 KG, STRENGTH-22 KN Note To Vendor: Make: UDYOGI, UDK03-1	561015360003	

	KIT, CLEANING;TYP:OIL SPILL;PN:OSK020TB MFR:UDYOGI;COMPRISG:(14 NO) ABSORBENT PAD (SIZE: 15 X 19 IN), (1 NO) ABSORBENT SOCKS (SIZE: 3 IN X 4 FT), (1 NO) ABSORBENT PILLOW (SIZE: 10 X 10 IN), (1 NO) EACH OF DUST PAN AND WIPER, (1 NO) CHEMICAL	471321000016	
	TRAY, SPILL; TYPE: DECK; MODEL NO:SP4150 MFR:UDYOGI; WIDTH: 128 CM, LENGTH: 130 CM, HEIGHT: 15 CM, CAPACITY: 2500 KG, SPECIFICATION: CAPACITY: 39 GAL/150L G, DRUM QUANTITY: 4 (CAPACITY: 210 L)	241019070010	
	VISOR, FACESHIELD; MODEL NO:FC 1000 MFR:UDYOGI; LENGTH: 275 MM, WIDTH: 400 MM, MATERIAL: POLYCARBONATE, COLOR: CLEAR, MOUNTING METHOD: CARRIER, THICKNESS: 2 MM, SPECIFICATION: IMPACT RESISTANCE: 190 M/S, LIQUID SPLASH PROTECTION MUST BE 3 , MOLTEN METAL PROTECTION MUST HAVE 9, MUST PROTECT PROTECTS AGAINST 99.9 PCT UV PROTECTION, FITS OVER THE SPEC, STANDARD: EN 166, ANSI Z87.1	461817020045	
	FRAME; TYPE: FRAME; MODEL NO:AL3 FACE SHIELD CARRIER MFR:UDYOGI; DIMENSIONS: 19 X 0.7 IN, COMMERCIAL SIZE: M IN, FRAME MATERIAL: ALUMINIUM, APPLICATION: PROTECTS FOREHEAD EXPOSED TO SPLASHES, HIGH SPEED FLYING SMALL & MEDIUM FRAGMENTS CAN BE USED WITH FACE SHIELD, TOGETHER PROTECTS FACE FROM VARIOUS HAZARDOUS, STANDARD: EN 166, ANSI Z87.1; FLIP UP TYPE CARRIER, ELASTICATED ALUMINIUM SPRING HEAD BAND, UNIVERSAL FIT WITH HELMETS, COMES WITH PVC OR POLYCARBONATE FACE SHIELD	302600000125	

	TAPE; TYPE: REFLECTIVE, COLOR: WHITE, YELLOW, RED, CONSPICUITY TAPE 983 DIAMOND GRADE A94495 DIAMOND GRADE VEHICLE MARKING FILM SERIES 983 IS A HIGHLY RETRO REFLECTIVE SHEETING CONSISTS OF PRISMATIC LENSES FORMED IN A DURABLE TRANSPARENT RESIN, SEALED IN A SYNTHETIC FILM AND BACKED WITH AN AGGRESSIVE PRESSURE SENSITIVE ADHESIVE WITH A PROTECTIVE LINER; MANUFACTURER: UDOYGI	312015000114	
	TAPE;TYP:ANTI SLIP;MN:ASGB260A MFR:UDYOGI;DMNSN:2 X 720IN, MTRL:SLIP-RESISTANT, CLR:BLACK AND LIGHT GREEN, SPCFCTN:GREASE, WATER AND MOST CHEMICALS RESISTANT, TEMPERATURE RANGE: 40 TO 162 DEG F, UV STABLE, DURABLE, HIGHLY WEAR AND TEAR-R	312015000185	
	ABSORBENT; OEM P/N:ORL60 OEM:UDYOGI; PHYSICAL FORM: ROLL; COMPATIBLE WITH OIL & OIL BASED LIQUIDS, ABSORPTION CAPACITY: 60 LIT/ROLL, CASE QUANTITY:1 ROLL, PACKING: 1 ROLL IN POLY BAG, COLOR: WHITE, SIZE: 38 CM X LG 46 M, WEIGHT: 4.2 KG	MPM10120640	
	TRAY, SPILL;PN:SOT01 MFR:UDYOGI;WD:360MM, LENGTH:450MM, HT:55MM, MTRL:STRONG LIGHT WEIGHT POLYETHYLENE, CPCTY:5.6L, CLR:BLUE	241019070019	
	TRAY, SPILL; TYPE: PALLET; MODEL NO:SD280 MFR:UDYOGI; WIDTH: 66 CM, LENGTH: 1300 CM, HEIGHT: 15 CM; QUALITY UV RESISTANT MATERIAL, RESISTANT TO MOST CHEMICAL, RUST AND CORROSION FREE, HIGH QUALITY SPILL CONTROL PALLETS, TWO-WAY FORKLIFT ENTRIES ALLOW EASY MOVEMENT, OIL,CHEMICAL DRUMS CAN BE HANDLED EASILY AND QUICKLY, THE HIGH-STRENGTH AND REMOVABLE GRATES ARE EASY TO CLEAN AND REPLACE, OVERSIZED SUPM HOLD 2-DRUMS (210L PER DRUM) TO CONTAIN LEAKAGE IN THE EVENT OF LEAK OR RUPTURE, AND KEEPS STORAGE AREA	241019070018	

	TRAY, SPILL;PN:STL11 MFR:UDYOGI;WD:360MM, LENGTH:490MM, HT:100MM, MTRL:STRONG LIGHT WEIGHT POLYETHYLENE, CPCTY:3000G, CLR:BLUE	241019070020	
	:PAD;TYP:UNIVERSAL ABSORBENT BARREL TOP;MN:UDPD25 MFR:UDYOG	241416000251	
	TRAY, SPILL;TYP:DECK;MN:SP142 MFR:UDYOGI;WD:68CM, LENGTH:68CM, HT:15CM, CPCTY:600KG, SPCFCTN:CAPACITY: 11 GAL/42L G, DRUM QUANTITY: 1 (CAPACITY: 210 L)	241019070028	
	CAN, OIL; MODEL NO:SCAN003Y MFR:UDYOGI; CAPACITY: 9.5 L, MATERIAL: 24 GAUGE GALVANIZED STEEL, COLOR: YELLOW, SPECIFICATION: SIZE: H 26 X D 29 CM, TYPE: II	271129050029	
	CAN, OIL CAPACITY: 19 L, MATERIAL: 24 GAUGE GALVANIZED STEEL, COLOR: YELLOW, SPECIFICATION: SAFETY DISPENSING TYPE II SIZE: H 40 X D 29 CM	271129050028	

	NET;TYP:SAFETY TRIPLE LAYER;MN:SN005 MFR:UDYOGI;DIA:12MM, LENGTH:10M, OPNG DIA:100 X 100, WD:5MTR, MTRL:POLYPROPYLENE ROPE, SPCFCTN:DOUBLE BRAIDED WITH MONO TRIPLE LAYER, FIRST LAYER: 5 MM BRAIDED 100 X 100 MM MESH, SECOND LAYER: 2.5 MM BRA	111621100046	
	TROLLEY, MECHANICS CREEPER WIDTH: 10 MM, HEIGHT: LOW 135 MM, SPECIFICATION: DIA 60 MM, CAPACITY: 136 KG; CREEPER AND STOOL COMBO, HIGH DENSITY FOAM PAD FOR HIGH DURABILITY AND GOOD COMFORT, SIX 360 DEG PP SWIVEL CASTORS	241015080010	
	:PLIERS, VISE GRIP;TYP:SELF GRIP AND WELDING;PN:2951-300 MFR:BAHCO;JAW OPNG CPCTY:4MM, LENGTH:300MM, MTRL:ALLOY STEEL, SPCFCTN:WITH CUTTER	271121120003	
	PLIERS, VISE GRIP;TYP:SELF GRIP AND WELDING;PN:2951-180 MFR:BAHCO;JAW OPNG CPCTY:2MM, LENGTH:190MM, MTRL:ALLOY STEEL, SPCFCTN:WITH CUTTER	271121120002	
	CONE, SAFETY;TYP:FLEXIBLE SPRING POST;PN:FFP-750 MFR:FRONTIER;MTRL:PLASTIC, HT:750MM, SPCFCTN:SELF RIGHTING, FLEXIBLE	461615080002	
	CHAIN; LENGTH: 10 M, MATERIAL: PLASTIC, HIGH QUALITY FLEXIBLE, COLOR COMBINATION: RED AND WHITE	311516000022	
	PALLET, MATERIAL HANDLING;TYP:DRUM SPILL;MN:PSP 2D MFR:POINEER;DMNSN:1340 X 720 X 150MM, LD CPCTY:60 LTR, MTRL:HIG STRENGTH COMPOSITE	241127000074	

	BARRIER, SAFETY;TYP:VERTICAL;MN:PS 2114 MFR:PIONEER SWIFT;DMNSN:HT 1000MM, MTRL:SS, SPCFCTN:QUEUE MANAGER;WITH BELTS (PRINTING), BARRICADE BELT: 2.5 M, NYLON BELTS, BASE DIA: 350 MM, WEIGHT: 8 KG, NYLON BELT LENGTH: 2.5 M, WEIGHT: 7 KG	461515050003	
	CONE, SAFETY; TYPE: SOLAR RETRACTABLE TRAFFIC CONE; MATERIAL: PVC, HEIGHT: 700 MM; INBUILT SOLAR PANEL AND BATTERY, EASY INSTALLATION, LIGHTWEIGHTDURABILITY CHEMICAL AND WEATHER RESISTANCE, BASE 250 X 250 X 40 MM	461615080007	
	CHAIN; TYPE: HEAVY DUTY, MODEL NO: PS 754B MFR: PIONEER SWIFT, WIDTH: 25 MM, PITCH: 8 MM, MATERIAL: PLASTIC, INDIVIDUAL BLOCK LENGTH: 50 MM- Rkt	311516000036	
	SPEED BUMP;TYP:RUMBLER;PN:PS1011 MFR:PIONEER SWIFT;SPD:20RPM, DMNSN:WD 125 X LG 500 X HT 25MM, MTRL:ACRYLONITRILE BUTADIENE STYRENE/PE POLY ETHYLENE, SPCFCTN:REFLETIVE LOAD BEARING CAPACITY: 10 TON, UV STABILISED, COLOUR (BLACK AND YELLOW)	461615090036	
	LIGHT, WARNING;TYP:PORTABLE;PN:PS-104 MFR:PIONEER SWIFT;PWR:12W, VOLT:4.0V, LNS CLR:RED, DMNSN:302 X 183MM, SPCFCTN:MATERIAL - PP FRAME, FUNCTION: FLASH, 4QUAD FLASH, STEADY CLOSE, SOLAR PANNEL - MONO CRYSTALLION SILICON SOLAR PANNEL 1500M	391117060025	
	BARRIER, SAFETY; TYPE: MINI, WATER FILLED; MODEL NO:PS B2 MFR:PIONNER; DIMENSIONS: 1050 X 500 X 800 MM, MATERIAL: PLASTIC, COLOR: RED; ROAD	MPM10167491	
	BARRIER, SAFETY; MODEL NO:PS B22 MFR:PIONNER; DIMENSIONS: L:1250,W:450:H:800 MM, MATERIAL: PLASTIC, COLOR: RED; ROAD	MPM10167501	

	BARRICADE;TYP:BOLLARD;MTRL:PP-CP BODY, PP BASE; REFLECTIVE SHEETING ON 3MM ACP SHEET; POLYMER WHEEL;SIZE: 2100 X 1300 MM; POLE SIZE: 100 X 1200 MM; REFLECTIVE SIGN BOARD SIZE: 750 X 1200 MM; TROLLEY SIZE: 2150 X 410 MM; SAND FILLED BASE; WI	461515010015	
	Piler GUARD	23252204275	
	:KIT, CLEANING;TYP:SPILL;MN:CMK100 MFR:UDYOGI;COMPRISG:LIST OF CONTAINS CHEMICAL ABSORBENT PAD (SIZE: 15 X 19 IN, QTY 30 NOS), CHEMICAL ABSORBENT SOCKS (SIZE: 3 IN X 4FT, QTY: 2 NOS), CHEMICAL ABSORBENT PILLOW (SIZE: 11 X 11 IN, QTY: 3NOS)	471321000027	
	1/2 inch VDE Insulated Socket Kit 8mm-32mm with Bag, 19pcs INSTKINBHBAG5,MAKE BAHCO	271132000180	
	Insulated Open End Wrench Kit 6mm-32mm with Bag, 23pcs INSTKINBHBAG2,MAKE BAHCO	271132000177	

	Insulated L Key Hexagonal Kit 3mm-12mm with Bag, 10pcs, INSTKINBHBAG6 ,MAKE BAHCO	271132000179	
	VDE Insulated Pliers Kit 200 mm Combination Plier, Snip Nose Plier, 45Degree Angled Snipe Nose Plier with Zip Bag ,MODEL -INSTKINBHBAG1,MAKE BAHCO	271132000181	
	VISOR; TYPE: PAULSON SAFETY SPARE; DIMENSIONS: 559 X 330 X330 MM, MATERIAL: ARAMID FIBER, COLOR: LIGHT GREEN, APPLICATION: ARC FLASH HOOD, SPECIFICATION: ARC RATING: 25 CAL/CM2,UNIVERSAL ROUND CUT U SHAPE DESIGN AT SHOULDER OF BETTER SHOULDER MOVEMENT, ATPV 25 CAL/CM2, NFPA 70E-15 PPE CAT. 4, STANDARD: IEC 61482- 2:2009 & EN ISO 11612:2015 (A1 B2 C2)	461817020064	
	STOPPER; TYPE: WHEEL; OEM P/N:PS 806 OEM:POINEER; WITH DIMENSIONS: 500 X 160 X 100 MM	411225000098	
	STUD, ROAD; TYPE: SOLAR; MODEL NO:PS 970A MFR:POINEER; DIMENSIONS: AP X 125 X 125 X 20 MM (SHANK SIZE: 30 MM), MATERIAL: AL ALLOY, COLOR: AMBER/RED/GREEN, APPLICATION: AUTOMATIC SWITCHING ON AND OFF SYSTEM UNDER DARK WEATHER, SPECIFICATION: WATER PROOF 100 PCT, WITH RECHARGEABLE BATTERY (1.2V/1600 MA), VIEW DISTANCE: MORE THAN 500 M, BEARABLE WEIGHT CAPACITY APX. 10 T, WORKING TIME: 2-3 DAY AFTER FULLY CHARGED, CHARGING TIME APX: 6HRS FROM DIRECT SUNLIGHT	461615140007	

	JACK, HYDRAULIC; MODEL NO:HSS2510 MFR:HI-FORCE; EXTENDED HEIGHT: 624 MM, LOAD CAPACITY: 25 TON, PUMP TYPE: SINGLE ACTING, SPRING ASSISTED RETURN, RETRACTED HEIGHT: 374 MM	241016120124	
	CYLINDER; TYPE: HYDRAULIC LOW HIEGHT SINGLE ACTING, SPRING ASSISTED RETURN; MODEL NO:HLS201 MFR:HI-FORCE; SPECIFICATION: CLOSED HT: 102 MM, STROKE LG: 44 MM, OUTSIDE DIA: 90 MM, MAX WORKING PRESSURE 700 BAR (10000 PSI), WT: 4.8 KGS	241118000444	
	JACK, HYDRAULIC; MODEL NO:HSS1012 MFR:HI-FORCE; EXTENDED HEIGHT: 684 MM, LOAD CAPACITY: 10 TON, PUMP TYPE: SINGLE ACTING, SPRING ASSISTED RETURN, RETRACTED HEIGHT: 379 MM	241016120123	
	PUMP; TYPE: SINGLE SPEED MANUALLY OPERATED; MODEL NO:HP110 MFR:HI-FORCE; PRESSURE RATING: 700 BAR (10000 PSI), SPECIFICATION: SINGLE ACTING INCORPORATES A 1 LTR USABLE OIL RESERVOIR, EXTERNAL PRESSURE RELEASE VALVE, FACTORY SET SAFETY RELIEF VALVE AND HAS A WEIGHT OF 5.6 KG THE PUMP OFFERS A DISPLACEMENT OF 2.9 CM3 PER STROKE	401515000985	
	JACK, HYDRAULIC; MODEL NO:HLS502 MFR:HI-FORCE; EXTENDED HEIGHT: 186 MM, LOAD CAPACITY: 50 TON, PUMP TYPE: SPRING ASSISTED RETURN LOW HEIGHT HYDRAULIC CYLINDER, RETRACTED HEIGHT: 126 MM	241016120122	

	JACK, HYDRAULIC; TYPE: HOLLOW PISTON CYLINDERS; MODEL NO:HHS306 MFR:HI-FORCE; EXTENDED HEIGHT: 472 MM, LOAD CAPACITY: 33 TON, PUMP TYPE: SINGLE ACTING SPRING RETURN, RETRACTED HEIGHT: 320 MM	241016120120	
	HOSE ASSEMBLY; TYPE: HIGH PRESSURE HYDRAULIC; MODEL NO:HC2 MFR:HI-FORCE; CORE MATERIAL: FLEXIBLE RUBBER, HOSE SIZE: 3/8 IN, LENGTH: 2 M, CONNECTION SIZE: 3/8 IN, CONNECTION TYPE: 18 NPT MALE FITTING ONE END, PRESSURE RATING: 700 BAR; WITH HAND GRIP PROTECTIVE STRAIN RELIEVERS & SAFETY FACTOR OF 4:1, CM1 COUPLER FITTED ONE END	401417643827	
	BLOCK; TYPE: GAUGE MOUNTING; MODEL NO:HGA2-25 MFR:HI-FORCE; MATERIAL: SS, WIDTH: 32 MM, LENGTH: 160 MM, HEIGHT: 3	301315000401	
	GAUGE, PRESSURE; MODEL NO:HG63G MFR:HI-FORCE; DIAL SIZE: 63 MM, PRESSURE RANGE: 0-700 BAR, CONNECTION SIZE: 1/4 IN, CONNECTION TYPE: NPT, FILLED: GLYCERINE, ACCURACY: (+/-) 1 PCT, STANDARD: EN837-1	411124120445	
	JACK, HYDRAULIC; TYPE: SINGLE ACTING HOLLOW PISTON CYLINDERS; MODEL NO:HHS206 MFR:HI-FORCE; EXTENDED HEIGHT: 456 MM, LOAD CAPACITY: 23 TON, PUMP TYPE: SINGLE ACTING SPRING RETURN, RETRACTED HEIGHT: 306 MM	241016120121	
	SCP-103 (8 tonne capacity, self-contained hydraulic puller with 3 jaws, complete with integral manually operated hydraulic pump and multi-position operating handle. Maximum reach 195mm, minimum spread 30mm and maximum spread 310mm. Weight 11.6kg) Make: HIFORCE	271117120086	

	SCP-203 (17 tonne capacity, self-contained hydraulic puller with 3 jaws, complete with integral manually operated hydraulic pump and multi-position operating handle. Maximum reach 275mm, minimum spread 50mm and maximum spread 430mm. Weight 23.7kg Make: HIFORCE	271117120087	
	WRENCH, TORQUE; TYPE: HYDRAULIC RATCHET; MODEL NO: TWH120N MFR: GEMINI POWER HYDRAULICS PVT LTD; DRIVE SIZE: 50-100 MM, TORQUE RANGE: 14349 N M, DRIVE END SHAPE: HEXAGONAL, INDICATOR TYPE: ANALOG	271117150084	
	COUPLER; TYPE: QUICK CONNECT; MODEL NO: CF1 MFR: HI-FORCE; SIZE: 3/8 IN, CONNECTION TYPE: FNPT HALF AND MNPT HALF; MAXIMUM WORKING PRESSURE: 700 BAR (10000 PSI),	321015170096	
	COUPLER; MODEL NO: CMF1 MFR: HI-FORCE	321015170097	
	MANIFOLD; TYPE: CONTROLLED; MODEL NO: HM2C MFR: HI-FORCE	401417610123	
	PUMP; TYPE: TWO STAGE; MODEL NO: HP257 MFR: HI-FORCE; PRESSURE RATING: 700 BAR, SPECIFICATION: HAND OPERATED	401515001189	
	JACK, HYDRAULIC; MODEL NO: HSS308 MFR: HI-FORCE; EXTENDED HEIGHT: 579 MM, LOAD CAPACITY: 29 TON, PUMP TYPE: SINGLE ACTING, SPRING ASSISTED RETURN, RETRACTED HEIGHT: 374 MM	241016120132	

	KIT, TOOL; TYPE: HYDRAULIC PULLER; MODEL NO:PKC10 MFR:HI-FORCE; COMPRISING: 2-JAW, 3-JAW, BEARING PULLERS, BEARING CUP PULLERS AND CROSS HEAD PULLERS, MINIMUM SPREAD 50 MM, MAXIMUM SPREAD OF 350 MM AND SUPPLIED COMPLETE WITH HI-FORCE HHS102 HOLLOW PISTON HYDRAULIC CYLINDER, HP110 SINGLE SPEED MANUALLY OPERATED PUMP, 2 METER HYDRAULIC HOSE, 100 MM DIAMETER PRESSURE GAUGE AND GAUGE BLOCK, ALL SUPPLIED IN A STORAGE AND TRANSPORT BOX, MAXIMUM WORKING PRESSURE 700 BAR	271132000104	
	IMPACT;TYP:PNEUMATIC;MN:IP3200 MFR:GEMINI POWER HYDRAULICS PVT LTD;DRV SZ:1IN, DUTY:HEAVY, TRQ RTNG:3185-2350N M	271127130082	
	JACK, HYDRAULIC; MODEL NO:HLS501 MFR:HI-FORCE; EXTENDED HEIGHT: 116 MM, LOAD CAPACITY: 50 TON, RETRACTED HEIGHT MM; SPECIAL FEATURES=INCLUDING: HAND PUMP, HOSE, PRESSURE GAUGE AND FITTINGS	241016120145	
	JACK, HYDRAULIC; MODEL NO:HFG504 MFR:HI-FORCE; EXTENDED,HEIGHT: 326 MM, LOAD CAPACITY: 50 TON, RETRACTED HEIGHT: 224 MM; SPECIAL FEATURES INCLUDING: HAND PUMP, HOSE, PRESSURE,GAUGE AND FITTINGS	241016120146	
	JACK, HYDRAULIC; MODEL NO:HLS1002 MFR:HI-FORCE; EXTENDED,HEIGHT: 203 MM, LOAD CAPACITY: 109 TON, RETRACTED HEIGHT: 143 MM; SPECIAL FEATURES INCLUDING: HAND PUMP, HOSE, PRESSURE GAUGE AND FITTINGS	241016120147	

	JACK, HYDRAULIC; MODEL NO:HPS500 MFR:HI-FORCE; EXTENDED HEIGHT: 82 MM, LOAD CAPACITY: 50 TON, PUMP TYPE: SINGLE ACTING LOW HEIGHT, RETRACTED HEIGHT: 67 MM; SPECIAL FEATURES INCLUDING: HAND PUMP, HOSE, PRESSURE GAUGE AND FITTINGS	241016120148	
	JACK, HYDRAULIC; MODEL NO:HVL50 MFR:HI-FORCE; EXTENDED HEIGHT: 51 MM, LOAD CAPACITY: 50 TON, RETRACTED HEIGHT: 45 MM; SPECIAL FEATURES INCLUDING: HAND PUMP, HOSE, PRESSURE GAUGE AND FITTINGS	241016120149	
	TOOL; TYPE: HYDRAULIC CRIMPING, HANDLE; MODEL NO:HT131LNC MFR:GEMINI POWER HYDRAULICS PVT LTD; MATERIAL: STEEL, SPECIFICATION: 130 KN; HYDRAULIC MANUAL TYPE CRIMPING TOOL KIT , WITH DAIS UPTO 400 SQ.MM	270000000095	
	CUTTER; TYPE: HYDRAULIC WIRE ROPE; MFR P/N:HSWC44 MFR:HI-FORCE; COMMERCIAL SIZE: 44 MM, MATERIAL: TOOL STEEL, SPECIFICATION: HEAT TREATED HIGH QUALITY BLADE, OPEN JAW DESIGN CUTTING HEAD; CUTTING TOOLS (QTY: 10 NOS), SEAL AND OTHER MANDATORY SPARES, FOR ONE YEAR	231519010151	
	SPLITTER; MFR P/N:HMNS200 MFR:HI-FORCE	321015290028	
	WRENCH, TORQUE; TYPE: HYDRAULIC; MODEL NO:TWH54N MFR:HI-FORCE; TORQUE RANGE: 5372-6037 N M, LENGTH: 250 MM, SPECIFICATION: MAXIMUM WORKING PRESSURE: 700 BAR, WEIGHT: 2.3 KG; WITH FEMALE HEXAGON CASSETTE RATCHET HEAD (TWH54NRH) AND QUICK CONNECT COUPLING	271117150083	

	RATCHET ATTACHMENT, SOCKET WRENCH; MODEL NO:TWH54NRH-200 MFR:HI-FORCE; DRIVE SIZE: 2 IN, DRIVE END SHAPE: HEXAGONAL, WRENCH SIZE: 46 X 4 X 36 (RECUDER) MM, MATERIAL: AS, SPECIFICATION: FEMALE DRIVE HEAD; ACROSS FLATS TO USE IN CON JUCTION, WITH DRIVE UNIT (TWH54N, WEIGHT 3 KG	271117110007	
	RATCHET ATTACHMENT, SOCKET WRENCH; MODEL NO:TWH54NRH-212 MFR:HI-FORCE; DRIVE SIZE: 2-3/4 IN, DRIVE END SHAPE: HEXAGONAL, WRENCH SIZE: 65 X 60 X 55 (RECUDER) MM, MATERIAL: AS, SPECIFICATION: FEMALE DRIVE HEAD; ACROSS FLATS TO USE IN CON JUCTION WITH DRIVE UNIT (TWH54N, WEIGHT: 3.4 KG)	271117110008	
	POWER PACK, HYDRAULIC; TYPE: TORQUE WRENCH PUMP UNIT; MODEL NO:TPE25A MFR:HI-FORCE; FLOW RATE: 0.75-6.5 L/MIN, PRESSURE RATING: 700 BAR, DRIVER: 3 SPEED, MOTOR CONTROL TYPE: SINGLE PHASE WITH 50 HZ, VALVE CONTROL: 4-WAY SPILT BLOCK AND SOLENOID WITH PENDANT CONTROLLED, RESERVOIR CAPACITY: 7 L, VOLTAGE: 230 V, SPECIFICATION: GLYCERIN FILLED PRESSURE GAUGE AND PP WEIGHT 39 KG	271200000067	
	HOSE ASSEMBLY; MODEL NO:HTWH6 MFR:HI-FORCE; HOSE SIZE: 1/4 IN, LENGTH: 6 M, CONNECTION SIZE: 1/4 IN, CONNECTION TYPE: FEMALE HALF COUPLER WITH QUICK RELEASE COUPLINGS AND DUST CAPS, PRESSURE RATING: 700 BAR, MEDIUM: HYDRAULIC OIL, SPECIFICATION: WEIGHT: 4.6 KG; SAFETY FACTOR: 4:1, WITH HYDRAULIC TORQUE WRENCH	401417643868	
	REDUCER; OEM P/N:GPH65-41 OEM:GEMINI POWER HYDRAULICS PVT LTD, REFERENCE NO:A/F 65-41	401736000694	

	REDUCER; OEM P/N:GPH85-80 OEM:GEMINI POWER HYDRAULICS PVT LTD, REFERENCE NO:A/F 85 TO 80	401736000692	
	REDUCER; OEM P/N:GPH85-75 OEM:GEMINI POWER HYDRAULICS PVT LTD, REFERENCE NO:A/F 85-75	401736000690	
	REDUCER; OEM P/N:GPH65-55 OEM:GEMINI POWER HYDRAULICS PVT LTD, REFERENCE NO:R A/F 65 TO 55	401736000693	
	REDUCER; OEM P/N:GPH65-50 OEM:GEMINI POWER HYDRAULICS PVT LTD, REFERENCE NO:A/F 65 TO 50	401736000691	
	MULTIPLIER, TORQUE WRENCH; MODEL NO:TWH54N SET MFR:HI-FORCE; SPECIFICATION: FEMALE HEXAGON DRIVE RATCHET HEAD, 2.9/16 IN OR 65 MM ACROSS FLATS TO USE IN CONJUNCTION WITH HYDRAULIC TORQUE WRENCH DRIVE UNIT, WEIGHT: 3.3 KG, WITH LIGHT WEIGHT ALUMINIUM, LOW PROFILE, HYDRAULIC TORQUE WRENCH DRIVE UNIT, FOR USE WITH ALL FEMALE HEXAGON CASSETTE RATCHET HEADS, TORQUE OUTPUT UP TO 5372 NM (3901 LBF.FT) WHEN USED WITH RATCHET HEAD SIZES 38-65 MM (1.7/16-2.9/16 IN) AF SIZES AND TORQUE OUTPUT UP TO 6037 NM (4384 LBF.FT) WHEN USED WITH RATCHET HEAD SIZES 70 TO 80MM (2.3/4-3.1/8 IN) AF SIZES, SUPPLIED COMPLETE WITH QUICK CONNECT COUPLINGS, OPERATING AND MAINTENANCE INSTRUCTIONS AND TEST CERTIFICATE IN A CARRYING AND STORAGE CASE, MAXIMUM WORKING PRESSURE 700 BAR (10,000 P.S.I), WEIGHT: 2.3 KG; FOR BLISS COLD MILL GEAR BOX BOLT TIGTENING	271117140013	

	MULTIPLIER, TORQUE WRENCH; MODEL NO: TWH120NRH-85 MFR: HI-FORCE; SPECIFICATION: FEMALE HEXAGON DRIVE RATCHET HEAD, 85 MM ACROSS FLATS TO USE IN CONJUNCTION, WEIGHT: 7.8 KG	271117140012	
	CYLINDER, ACTUATING LINEAR; TYPE: HYDRAULIC SINGLE ACTING; MODEL NO: HLS301 MFR: HI-FORCE; SPECIFICATION: SPRING ASSISTED RETURN LOW HEIGHT JACK. CLOSED HEIGHT: 83MM, STROKE LENGTH 25MM, OUTSIDE DIAMETER: 102MM. MAXIMUM WORKING PRESSURE: 700 BAR (10,000 P.S.I.) WEIGHT 5.0KGS	271317011636	
	BLOCK; TYPE: HYDRAULIC GAUGE MOUNTING; MODEL NO: GHGA2-25 MFR: HI-FORCE; FOR FITMENT HYDRAULIC PRESSURE GAUGES, WITH (1/4 IN) NPT FEMALE GAUGE CONNECTION AND (3/8 IN) NPT MALE TO (3/8 IN) NPT FEMALE INLET AND OUTLET CONNECTIONS, MAXIMUM PRESSURE: 700 BAR (10,000PSI)	301315000508	
	HOSE ASSEMBLY; TYPE: HYDRAULIC THERMOPLASTIC; MODEL NO: GHC3 MFR: HI-FORCE; LENGTH: 3 M, CONNECTION SIZE: 3/8-18 IN, CONNECTION TYPE: NPT MALE FITTING ON OTHER END, PRESSURE RATING: 700 BAR, SPECIFICATION: FITTED WITH STRAIN RELIEF GUARDS AT BOTH ENDS, QUICK RELEASE MALE COUPLER ON ONE END AND MAXIMU, WITH SAFETY FACTOR OF 4:1	401417644996	
	REDUCER; OEM P/N: GPH65-41 OEM: GEMINI POWER HYDRAULICS PVT LTD, REFERENCE NO: A/F 65-41	401736000694	
	HOSE; TYPE: HYDRAULIC; MODEL NO: HTWH5 MFR: HI-FORCE; LENGTH: 5 M; TORQUE WRENCH HOSE SET (QTY: 2 PCS), SUPPLIED FITTED WITH QUICK RELEASE COUPLINGS AND DUST CAPS AT	401420001028	

	BOTH ENDS, MAXIMUM WORKING PRESSURE 700 BAR (10,000 PSI) WITH 4:1 SAFETY FACTOR		
	UNIT, PUMP; TYPE: HYDRAULIC; MODEL NO:TPE25D MFR:HI-FORCE; VOLTAGE: 230 V, SINGLE PHASE WITH 50 HZ MOTOR, ELECTRICALLY DRIVEN PREMIUM LINE HYDRAULIC TORQUE WRENCH THREE SPEED, 8 PISTON PUMP DESIGN WITH CAPACITY 7 LT, OIL RESERVOIR OFFERING LOW PRESSURE FLOW RATE 6.5 LT PER MINUTE AT 65 BAR, MEDIUM PRESSURE FLOW RATE 1.5 LT PER MINUTE AT 325 BAR AND HIGH PRESSURE FLOW RATE 0.75 LT PER MINUTE AT 700 BAR, SUPPLIED FITTED WITH EXTERNALLY ADJUSTABLE TORQUE SETTING PRESSURE RELIEF VALVE, PRESSURE TRANSDUCER AND DIGITAL PRESSURE GAUGE READING BAR/PSI/NM/LBFFT, AUTOMATICALLY ACTIVATED OIL COOLING HEAT EXCHANGER SYSTEM, MULTI OUTLET 4-WAY SPLIT BLOCK FOR SIMULTANEOUS OPERATION OF FOUR HYDRAULIC TORQUE WRENCHES AND SOLENOID VALVE WITH PENDANT CONTROLLED AUTO RETRACT OR FULL AUTOMATIC CYCLE FUNCTION WITH (5 M) CABLE, PUMP UNIT IS FITTED WITHIN A RIGID ROLLBAR PROTECTIO UNIT, PUMP; TYPE: HYDRAULIC; MODEL NO:TPE25D MFR:HI-FORCE; VOLTAGE: 230 V, SINGLE PHASE WITH 50 HZ MOTOR, ELECTRICALLY DRIVEN PREMIUM LINE HYDRAULIC TORQUE WRENCH THREE SPEED, 8 PISTON PUMP DESIGN WITH CAPACITY 7 LT, OIL RESERVOIR OFFERING LOW PRESSURE FLOW RATE 6.5 LT PER MINUTE AT 65 BAR, MEDIUM PRESSURE FLOW RATE 1.5 LT PER MINUTE AT 325 BAR AND HIGH PRESSURE FLOW RATE 0.75 LT PER MINUTE AT 700 BAR, SUPPLIED FITTED WITH EXTERNALLY ADJUSTABLE TORQUE SETTING PRESSURE RELIEF VALVE, PRESSURE TRANSDUCER AND DIGITAL PRESSURE GAUGE READING BAR/PSI/NM/LBFFT, AUTOMATICALLY ACTIVATED OIL COOLING HEAT EXCHANGER SYSTEM, MULTI OUTLET 4-WAY SPLIT BLOCK FOR SIMULTANEOUS OPERATION OF FOUR HYDRAULIC TORQUE WRENCHES AND SOLENOID VALVE WITH PENDANT CONTROLLED AUTO RETRACT OR FULL AUTOMATIC CYCLE FUNCTION WITH (5 M) CABLE, PUMP UNIT IS FITTED WITHIN A RIGID ROLLBAR PROTECTIO	201427000002	

	MULTIPLIER, TORQUE WRENCH; MODEL NO: TWH120NRH-85 MFR: HI-FORCE; SPECIFICATION: FEMALE HEXAGON DRIVE RATCHET HEAD, 85 MM ACROSS FLATS TO USE IN CONJUNCTION, WEIGHT: 7.8 KG	271117140012	
	TAPE; TYPE: PHOTO LUMINESCENT; DIMENSIONS: 1 X 1 FT, MATERIAL: PVC, COLOR: GREENISH YELLOW, SPECIFICATION: THICKNESS: 1 MM (+10 PCT) SERVICE TEMP: -20 TO +80, GLOW VISIBLE UPTO GREATER THAN 24 HOURS IN TOTAL DARKNESS, FUGISTATIC, NON-RADIOACTIVE, CONTAINS NO LEAD OR PHOS-PHORUS, NO HEALTH OR ENVIRONMENTAL PROBLEM, SIMPLE TO INSTALL AND EASY TO MAINTAIN NON PEELABLE AND AND NON SCRATCHABLE SELF EXTINGUISHING, LIFE: LIFE GREATER THEN 20-30 YEARS FOR BEST WORKING-INDOOR; RIGID PHOTOLUMINESCENET BASED GLOW-IN-THE DARK RIGID SHEET WITH HIGH INTENSITY LUMINOUS PROPERTIES ENCLOSED IN A TRANSPARENT WEATHERPROOF UV STABILIZED COATED SHEET, GP WITH UV SCREEN PRINTING BY IMPORTED INKS	312015000321	
	TAPE; TYPE: PHOTO REFLECTIVE; DIMENSIONS: 1X 1 FT, MATERIAL: PVC, COLOR: GREENISH YELLOW, SPEC-IFICATION: THICKNESS: 1 MM (+10 PCT) SERVICE TEMP: -40 TO +120 DEG C, GLOW VISIBLE UPTO GREATER THAN 12 HOURS IN TOTAL DARKNESS COEFFICIENT OF RETROREFLECT ION: 250 CD/LX/M2 HIGH INTEN-SITY PRISMATIC REFLECTION, FUGISTATIC, NONRADIOACTIVE, CONTAINS NO LEAD OR PHOSPHORUS, NO HEALTH OR ENVIRONMENTAL PROBLEM, SIMPLE TO INSTALL AND EASY TO MAINTAIN NON PEELABLE AND NON SCRATCHABLE SELF EXTINGUISHING, NON SCATCH ABLE, NON FLAMMABLE, NON PEELABLE LIFE : LIFE GREATER THAN 20-30 YEARS FOR BEST WORKING-INDOOR AND 5-6 YEARS OUTDOOR; AUTOGLO PHOTO REFLECTIVE ON 1 MM ALUMINIUM SHEET (A) 10000 APRA (R) AUTOGLO PHOTOREFLECTIVE IN ALU-MINIUM SHEET BASED GLOW-IN-THE DARK APRA(R)	312015000322	

	SHEET WITH DIAMOND GRADE SHEETING WITH SUPER EXTRA GLOW AND INTENSE LUMINOUS PROPERTIES ENCLOSED IN A TRANSPARENT WEATHERPROOF UV STABILIZED COATED SHEET, GP WITH UV SCREEN PRINTING BY IMPORTED INKS		
	STAIRCASE; TYPE: AUTOGLO STAIR NOSING; DIMENSIONS: 2500 X 1500 X 800 MM, STEP QUANTITY: 7 NO, STEP HEIGHT: 300 MM, MATERIAL: AL, COLOR: GREENISH YELLOW, SPECIAL FEATURES: ALUMINIUM ANGULAR PROFILE TO BE USED ON THE EDGES OF STAIRCASES WITH BLACK ANTISKID STRIP TO AVOID SLIPPING IN CASE OF EMERGENCY WITH ARS 10000 SHEET TO GP IDENTIFY THE FLIGHT OF STAIRS TO AVOID FALL, SPECIFICATION: ALUMINIUM STRIP WIDTH: 20 MM, THICKNESS: 1 MM (+/-10 PCT) BLACK ANTISKID STRIP WIDTH: 25 MM, THICKNESS: 2 MM (+/-10 PCT) PHOTOLUMINESCENT STRIP WIDTH: 13 MM, THICKNESS: 3 MM (+/- 10 PCT), GLOW VISIBLE UP TO LESS THAN 24 HOURS IN TOTAL DARKNESS, SERVICE TEMPERATURE: -40 TO +120 DEG C, LIFE GRATER THAN 7-10 YEARS FOR INDOOR 3-5 YEARS FOR OUTDOOR; FUNGI STATIC, NON-RADIOACTIVE, CONTAINS NO LEAD OR PHOSPHOROUS, NO HEALTH OR ENVIRONMENTAL PROBLEMS, NON FLAMMABLE, SIMPLE TO INSTALL AND EASY TO MAINTAIN, CAN BE SCREWED OR JUST PEEL OFF TO STICK, SELF-EXTINGUISHING	301916060008	
	AUTOGLO PHOTO LUMINESCENT ON 0.2MM FLEXIBLE SHEET TAPES WITH LAMINATED (F) AFS 10000 AUTOGLO Flexyle Photoluminescent based Glow-in-the dark sheeting GP with luminous properties enclosed in a weatherproof UV stabilized film. With UV screen printing by imported ink SPECIFICATION:- Thickness: 0.2mm (+10%) Service Temp: -40 to +80'C Surface: Greenish Yellow Visibility: Glow visible upto >12 hours in total darkness Properties: Fugistatic, Non-toxic. Non, radioactive, Contains no lead or Phosphorus, No health orenvironmental problem, Simple to install & easy to maintain, Just peel off to stick. Life: Life> 10-15years for Best Working - INDOOR MODEL- (F) AFS 10000, MAKE- AUTOGLO (PROLITE)	3120150002	

	SAN 58 3.15MM UNKNOWN / DISSIMILAR STEEL WELDING WITH HIGH TENSILE STRENGTH	232718100433	
	SAN 58 4.00MM UNKNOWN / DISSIMILAR STEEL WELDING WITH HIGH TENSILE STRENGTH	232718100432	
	SAN66SPL 2.50MM CAST IRON TO CAST IRON/SS/MS/CS	232718100029	
	SAN66SPL 3.15MM CAST IRON TO CAST IRON/SS/MS/CS	232718100099	
	SAN56UT 3.15MM ANY SS GRADE/DISSIMILAR/UNKNOWN STEEL WELDING	232718100103	
	SAN56UT 4MM ANY SS GRADE/DISSIMILAR/UNKNOWN STEEL WELDING	232718100033	
	SAN 76XT 4MM HARDFACING FOR RESISTANCE AGAINST ABRASION,IMPACT, EROSION, TEMPERATURE	23271810AB09	
	SAN 55 4MM SS TO SS/Mn STEEL / SS TO MS/CS / DISSIMILAR STEEL JOINING	232718100034	
	SAN 92 4MM CUTTING/GOUGING/CHAMFERING ELECTRODE	391214360140	
	SAN 49 3.15MM SS TO MS/CS/SS WITH EXCELLENT FINISH AND STRENGTH	232718100454	

	SAN 49 2.50MM SS TO MS/CS/SS WITH EXCELLENT FINISH AND STRENGTH	232718100459	
	SAN 71 3.15MM MACHINABLE HARDFACING ELECTRODE FOR IMPACT AND FRICTION RESISTANCE	232718100457	
	SAN 71 4MM MACHINABLE HARDFACING ELECTRODE FOR IMPACT AND FRICTION RESISTANCE	232718100456	
	SAN 50 3.15MM WELDING ELECTRODE FOR DISSIMILAR APPLICATIONS AND HIGH TEMPERATURE RESISTANCE	232718100455	
	SAN 50 2.50MM WELDING ELECTRODE FOR DISSIMILAR APPLICATIONS AND HIGH TEMPERATURE RESISTANCE	232718100458	
	SLEEVE, PROTECTIVE; TYP:VFPS; PN:NAMONKAR VFPS -30 MFR:NAMONKAR ELECTRICALS PVT. LTD.; DMNSN:30MM, MTRL:FIBERGLASS WITH THICK COATING OF SILCONE RUBBER, CLR:BRICK RED, APPLN:TO PROTECT HOSES, CABLES AND HARNESS FROM DAMAGE DUE TO EXPOSURE TO E	201200000110	
	SLEEVE, PROTECTIVE; MFR P/N: NAMONKAR VFPS-25; Dimensions:25 ±0.8 mm; Material: Fiberglass with silicone coating; Wall thickness:2.9 ±0.5 mm; MOQ:25 m; Operating:-50 to +260°C; Max short exposure:1050°C; Resist water and oil; Velcro closure.	201200000131	

	SLEEVE, PROTECTIVE; MFR P/N: NAMONKAR VFPS-35; Dimensions:35 ±1 mm; Material: Fiberglass with silicone coating; Wall thickness:3.4 ±0.5 mm; MOQ:25 m; Operating:-50 to +260°C; Max short exposure:1050°C; Resist water and oil; Velcro closure.	201200000130	
	SLEEVE, PROTECTIVE; MODEL NO:VFPS -70 MFR:NAMONKAR ELECTRICALS PVT. LTD.; DIMENSIONS: ID 70 MM X LG 25 MTR X WALL THICKNESS: 4.7 (+/- 0.7) MM, MATERIAL: FIBERGLASS WITH THICK COATING OF SILICONE RUBBER, COLOR: BRICK RED, APPLICATION: TO PROTECT HOSES, CABLES AND HARNESS FROM DAMAGE DUE TO EXPOSURE TO EXTREME HEAT, OPEN FLAME AND MOLTEN SPLASH, MAX SHORT-TERM EXPOSURE: 1050 DEG C, CUTTING TOOL-SCISSORS, OTHER FEATURES-RESISTANT TO WATER AND OIL, SLEEVE WITH VELCRO HOOK AND LOOP CLOSURE, SPECIFICATION: OPERATING RANGE: -50 TO +260 DEG C	201200000126	
	SLEEVE, PROTECTIVE; TYP:VFPS; PN:NAMONKAR VFPS -50 MFR:NAMONKAR ELECTRICALS PVT. LTD.; DMNSN:50MM, MTRL:FIBERGLASS WITH THICK COATING OF SILICONE RUBBER, CLR:BRICK RED, APPLN:TO PROTECT HOSES, CABLES AND HARNESS FROM DAMAGE DUE TO EXPOSURE TO E	201200000111	
	SLEEVE, PROTECTIVE;MN:VFPS -70 MFR:NAMONKAR ELECTRICALS PVT. LTD.;DMNSN:ID 70 X LG 25 MTR X WALL THICKNESS: 2.1 +/- 0.5MM, MTRL:FIBERGLASS WITH THICK COATING OF SILICONE RUBBER, CLR:BRICK RED, APPLN:TO PROTECT HOSES, CABLES AND HARNESS FRO	201200000126	

	KNIFE, TYP: MULTIPURPOSE TRADESMAN; P/N:2446; MFR: BAHCO; DIMENSION:225 MM; MATERIAL: Solid stainless steel; Dual-component handle; Double button holster	271115000193	
	Five-Drawer Storage Cabinet KRP5CAB , Use to store or inventory small tools and parts • Black, heavy-duty polypropylene cabinet with five removable drawers (KRP5PB) • Each drawer features a translucent plastic divider system that allows full customization for individual needs ,size - Cabinet dimensions are 15-1/2" W x 14-1/2" D x 16" H ,make snapon	561015300250	
	GREASE GUN, PNEUMATIC; TYPE: FOOT OPERATED; MFR P/N:FOP 10A MFR:GROZ; CAPACITY: 10 KG, SPECIFICATION: FITTED WITH PISTOL HANDLE, DELIVERY HOSE (ID: 1/4 IN)	271129010029	