


TECHNICAL SPECIFICATIONS OF - SILVER THERMAL CONDUCTIVE THICK COAT

MODEL: STCT

Parameter	Specification
Customized	In putty form (A+B)
Adhesiveness	Excellent
Gravity	1.10
Straingh	250 mpa
Tensile Strength @25 °C	26,540 psi
Curing time	2 to 4 hours
Lifetime	1 to 2 years
Application	Electrical bus bars
Conductivity	Excellent electrical conductivity & heat
Packing	25kg.
Storage life	12 months

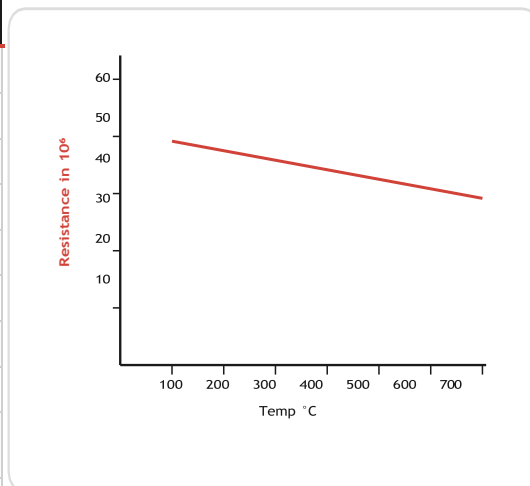

Silver thermal conductive paste it's electrical conductivity increases with rise in temperature, (STCT) offers negligible change in resistance with rise in temperature, which means, electrical conductivity of (STCT) is almost constant with rise in temperature up to 750 deg. (as shown in graph). Its low resistance and arc (electric spark) quenching properties.

Silver thermal Conductive Paste is a type of conductive adhesive, which has silver nano-particles as its main ingredient. It is highly thermally and electrically conductive. The silver paste offers extreme adhesion, which is very useful in busbar applications.

It is mainly preferable for applications that need fast-curing adhesion as the product dries up quickly. The product is suitable for thick film coatings where liquid silver is not an option. Once it dries up, it offers a very high glass transition temperature up to 750 deg. prevents blocking.

The silver paste has been touch dry in 10 minutes and full cured at 50 Degree within 2 - 4 hr. Sometimes the curing process performs at high temperatures to reduce the curing time.

PROPERTIES:

- It is made of the best conductive metal; hence it is highly conductive than any other conductive paint.
- The Curing temperature of the paste is 50 deg. / 2 - 4 hr.

APPLICATIONS:

- Suitable for application on LV/HV, AC/DC installations (Inside/Outside electrical equipment like isolator switches, circuit breakers, bus bars etc).
- The Silver thermal Conductive paste works in electronic gadgets requiring strong adhesion, higher thermal and electrical conductivity,
- It also utilizes in busbars, Scanning Electron Microscopy and acts as a barrier to protecting sensitive parts of a gadget from electromagnetic radiation. It is also applied over ITO glass, and ITO film for making busbar connections.