

COMUNE DI MILANO


CONSTRUCTION DOCUMENTATION

Property
AST VENEZIA S.R.L.

Via Borgonuovo, 9
20121 Milano

Tenant
RH MILAN S.R.L.

Vicolo San Giovanni sul muro, 9
20121 Milano

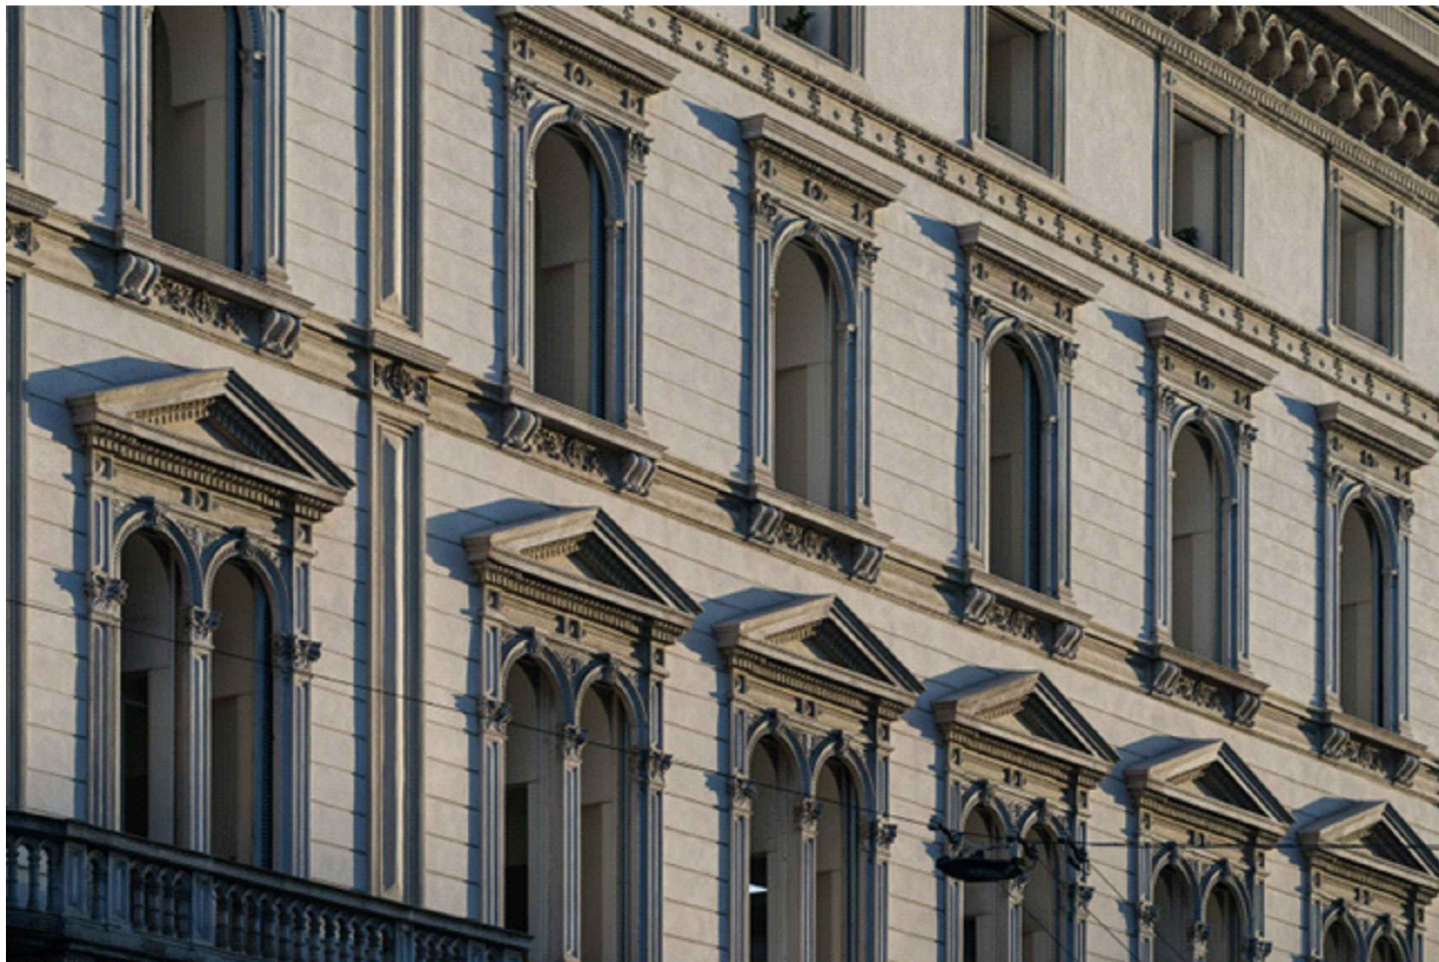

CONSULTANT'S TEAM



BMS Progetti s.r.l.

piazza santissima trinità 6
20154 milano

bmsprogetti.it

Designer
ing. Aldo Bottini

Consultants
SMP studio
PAN studio
Jensen Hughes

Ristrutturazione Edilizia - Corso Venezia 56

TITLE

Computo metrico attrezzature piano B01

SCALE

DOCUMENT

20011 P E F&B C01

ISSUE

28/03/2025

REV	DATE	DESCRIPTION	EDITED	VERIFY	APPROVED
00	28/03/2025	Tender package	MR	CC	AM
01	04/04/2025	Tender package	MR	CC	AM

PE
F&B
C01

Premessa & note di lettura del presente documento

Progetto di riferimento

Il documento è stato sviluppato sulla base del progetto esecutivo consegnato in data 07.03.2025 e 28.03.2025 basato sui seguenti riferimenti:

- Design intent da parte di RH del 27.12.2024
- Revisione da parte (RH) del 13.02.2025
- Revisione del giardino (OHLA) del 13.02.2025
- Progetto illuminotecnico (Foundry) consegnato il 28.02.2025
- Progetto Audio (VIVID) revisione del 03.03.2025
- Progetto antennas (Signal solution) revisione del 26.02.25
- Progetto prevenzione incendi del 30.09.2024 *(in attesa del parere)*
- Parere favorevole con prescrizioni del 28.11.2024 da parte della sovrintendenza
- Autorizzazione paesaggistica parere favorevole con prescrizioni del 05.02.2025

Considerazioni

Esclusioni nel presente documento

Tutte le attrezzature fornite in comodato d'uso tipo POS, CASSA, WINE BOTTLE RACK.

01 _ DISH WASH & POLISH

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
100.1	2	Cambro	CBU214872V 4580	STORAGE SHELVING, 4 GRILLED SHELVES		
100.2	1	Cambro	CBU213672V 4580	STORAGE SHELVING, 4 GRILLED SHELVES		
101	1			<p>WORK TOP WITH UPSTAND - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.</p> <p>GLASSWASHER - Self-cleaning washing system Control of dishwasher operation also through smart devices USB interface</p>		
105	1	Hobart	PROFI GX-10C	<p>Cold rinsing Filter position control Bowl capacity 10.6 l Pool heating 1.7 kw Baskets 500x500 mm</p>		
107	1		642010/S	<p>304 S/S WALL HOOD+FILTERS - Constructed in 304 AISI stainless steel. Continuously welded joints. Equipped with labyrinth filters in 304 AISI stainless steel, blind panels in 304 AISI stainless steel, grease collecting trough all around and condensate collecting tray.</p>		
108	1	Hobart	PROFI AMX-10B	<p>HOOD-TYPE DISHWASHER - 6 automatic cycles: short, standard, intensive, starch-removal, permanent, hygiene - Strainer soil sensor - Integrated Wi-Fi module - Self-cleaning programme - USB-interface for comfortable download of operational data - Rack size 500x500 mm</p>		

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
109	1			WORK TOP WITH UPSTAND - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.		
109	1			DROP-IN BOWL RIGHT DRAINAGE		
109	1			CUPBOARD BASE FOR SINK TOP - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system.		
109	1			FAUCET WITH BLACK PLASTIC LEVER		
109	1			SHOWER GROUP + WALL MIXER WITH BLACK PLASTIC LEVER 23.70 CM AND UPPER FUSED SPOUT 30 CM		
109.1	3	Metalcarr elli	2102TR	WHEELED WASTE COLLECTOR, CAP. 135 LT - AISI 304 stainless steel waste container, brushed finish Watertight pressed bottom with no sharp edges Manual opening lid: 1/2+1/2 Wheel-mounted		
109.2	1			WALL MOUNTED SHELF FOR BASKETS - Constructed in 304 AISI stainless steel. Square 25x25mm tubular frame. Fitted with bottom tray and drain hole. Designed for baskets 500x500mm.		
109.3	1			SOLID WALL SHELF WITH BRACKETS		
110	1			PRE-RINSE FAUCET ASSEMBLY INCLUDED IN ITEM 109		

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
112	1			WORK TABLE WITH UPSTAND REAR AND SIDE RIGHT AND LEFT, SUBFRAME - The 50mm high worktop in 304 AISI stainless steel, 1mm in thickness, has upturned edges and incorporates a layer of sound deadening, waterproof and fireproof material. Integral radiused rear upstand, h=100mm. Square section legs 40x40mm on 1" height-adjustable feet in 304 AISI stainless steel.		
115	1			SOLID WALL SHELF WITH BRACKETS		
116	5		361238	DISHWASHER RACK DOLLY 500 MM		

02_ JANITOR

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
				JANITOR		
121	1			CLOSED CABINET WITH HINGED DOOR MADE ENTIRELY OF AISI 304 STAINLESS STEEL WITH SCHOTCH BRITE FINISH INTERNAL COMPARTMENT COMPLETES WITH BATHTUB AND TAP		
122	1	Cambro	CBU1830V5	STORAGE SHELVING, 5 GRILLED SHELVES		

03 _ POT WASH

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
125	1			DROP-IN BOWL RIGHT DRAINAGE		
126	1	HUPFER	112465	GASTRONORM TROLLEY FOR 7 × GN - Gastronorm trolley in low version for storing GN 1/1 containers and associated partition elements.		
127	1			WORK TOP WITH UPSTAND + N. 2 PREP SINK The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.		
127	1			AMBIENT UNIT 1 HINGED DOOR 600MM Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.		

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
127	1			AMBIENT UNIT WITH 4 DRAWERS Constructed entirely in 304 AISI stainless steel with front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Drawers in 304 AISI stainless steel with telescopic runners for easy extraction of GN containers. 45° degree internal side corner junction system. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation.		
127	1			AMBIENT UNIT 1 HINGED DOOR WITH HOPPER DUSTBIN Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.		
127	1			AMBIENT UNIT 1 HINGED DOOR Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.		
127	1			SHOWER UNIT + WALL-MOUNTED MIXER		
127	1			FAUCET WITH BLACK PLASTIC LEVER		
127.1	1			N. 2 PREP SINK INCLUDED IN ITEM 127		

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
128	1			SOLID WALL SHELF WITH BRACKETS		
128.1	1			SOLID WALL SHELF WITH BRACKETS		
129	1	Cambro	CBU244872V 4580	STORAGE SHELVING, 4 GRILLED SHELVES		

04 PREPARATION

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
------	------	-------	------	-------------	---------------------	--------------

130 1

WORK TOP WITH UPSTAND - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.

130 1

AMBIENT UNIT 1 HINGED DOOR - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.

130 1

AMBIENT UNIT 1 HINGED DOOR WITH HOPPER DUSTBIN - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
130	1			AMBIENT UNIT WITH 4 DRAWERS - Constructed entirely in 304 AISI stainless steel with front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Drawers in 304 AISI stainless steel with telescopic runners for easy extraction of GN containers. 45° degree internal side corner junction system.150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation.		
130	1			FAUCET WITH BLACK PLASTIC LEVER		
130	1			DROP-IN BOWL RIGHT DRAINAGE		
130.1	1			PREP SINK INCLUDED IN ITEM 130		
131	4			WALL SHELF WITH BRACKETS		
132	1	Electrolux Professional	710000	REFR.COUNTER 290L 2xDOOR NOTOP CU_LFT GALV - AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. N. 2 full doors. Built-in refrigeration unit. Operating temperature: -2+10°C. R290 gas in refrigeration circuit. Supplied with 1 grid for each door compartment		

05 _ GARMO

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
------	------	-------	------	-------------	---------------------	--------------

WORK TOP WITH UPSTAND + REFRIGERATED DISPLAY CASE MADE TO MEASURE - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.

136 1

AMBIENT UNIT 1 HINGED DOOR + N. 2 INFILL PANELS - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.

136 1

AMBIENT UNIT 1 HINGED DOOR + BIN-
Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.

136 1

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
136	1			AMBIENT UNIT 1 HINGED DOOR WITH GN BOWL HOLDER GUIDES 1/1 - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.		
136	1			DROP-IN BOWL RIGHT DRAINAGE		
136	1			FAUCET WITH BLACK PLASTIC LEVER		
136	1		JCLASS IN 30 IB ACWG + 6180MP	JCLASS IN 30 IB ACWG + 3-WAY TAP ONLY PURIFIED + FILTER + BOWL AND TAP - Liters per hour 30 Lt/H Continuous liters 7 Lt Water temperature 3/10° Dim 255x400x400 mm		
136.1	1			BUILT-IN HAND SINK INCLUDED IN ITEM 136		
136.2	1	Electrolux Professional	710017	REFR.COUNTER 290L 4x1/2DRW NOTOP CU_LFT GALV - AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. N. 4X1/2 drawers. Built-in refrigeration unit. Operating temperature: -2+10°C. R290 gas in refrigeration circuit.		
136.3	1			REFRIGERATED DISPLAY CASE INCLUDED IN THE TOP, TAILOR-MADE EXECUTION		
137	2			SOLID WALL SHELF WITH BRACKETS		

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
138	1	Electrolux Professional	710000	REFR.COUNTER 290L 2xDOOR NOTOP CU_LFT GALV - AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. N. 2 full doors. Built-in refrigeration unit. Operating temperature: -2+10°C. R290 gas in refrigeration circuit. Supplied with 1 grid for each door compartment		
140	1	Hupfer	112775	GASTRONORM TROLLEY FOR 18 × GN		

06 _ HOT LINE 2

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
------	------	-------	------	-------------	---------------------	--------------

304 S/S WALL HOOD+FILTERS+LED LIGHTS -

Constructed in 304 AISI stainless steel.
Continuously welded joints. Equipped with
labyrinth filters in 304 AISI stainless steel, blind
panels in 304 AISI stainless steel, grease collecting
trough all around and condensate collecting tray.

141 1

141.2 1 Ansul

FIRE SUPPRESSION SYSTEM

141.3 1

**STAINLESS STEEL PANELS WITH SHELF GUIDES
DIMENSION AS DRAWING**

142 1

CB1ERRA,000
0103 +
60.73.991 +
60.31.200

**N. 2 RATIONAL ICOMBI PRO OVEN 6 GN 1/1 + KIT
COMBI DUO + STANDARD SUBFRAME OPEN ON
ALL SIDES** Meals per day: 30-100, Connected
power: 10.8 kw, Voltage: 3 NAC 400 V, Width: 850
mm, Depth (including door handle): 775 mm (842
mm), Height (including ventilation hose): 754 mm
(804 mm)

142.1 1

EVERPURE

145 1

WORK TOP WITH UPSTAND The 40mm high
worktop in 304 AISI stainless steel, incorporates an
18mm under panel made of sound deadening
material. Front and rear longitudinal stainless steel
c-channel reinforcement. Special shaped front and
rear profiles, without burrs, to avoid water
leakage. Fully welded and shapely polished
corners. 100mm boxed heavy duty splash back
with a 45° top angle and fully welded sides. Work
tops can be mounted on brackets, legs or bases in
order to obtain a work height of 950mm.

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
145	1			<p>AMBIENT UNIT 1 HINGED DOOR - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>		
145	1			<p>AMBIENT UNIT 1 HINGED DOOR + GN 1/1 BASIN GUIDES - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>		
146	1		391126	<p>ELECTRIC PASTA COOKER 1X40 LT WELL - Infrared heating system. Constant starch removal during the cooking process. The 40 liter tank is pressed in 316-L type stainless steel to protect against corrosion. Safety thermostat and electromechanical sensor prevent the machine from working without water. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right angled side edges eliminate gaps and possible dirt traps between units.</p>		
146	1		913124	<p>3 ERGON. BASKETS FOR PASTA COOKER 40L</p>		

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
147	1			<p>WORK TOP WITH UPSTAND - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.</p>		
147.1	1		BRS/120	<p>GN 1/1 REFRIGERATED BASE UNIT FOR 650/700 COOKING TOPS - Dimensions 1200×640×610 mm, Temperature -2/+8°C, Doors 2 Cooling unit plug-in unit, Capacity (l) 162, Capacity GN 1/1 racks</p>		
148	1		INSTINCT HOB 10	<p>COUNTERTOP INDUCTION PLATE - This appliance with two cooking zones has 2 × 12 power levels with two holding functions of 77 to 212°F (25 to 100°C) and a timer function. This Hob is quick to heat up, energy efficient, reliable and convenient to use Dim 380x473x200mm</p>		
149	1		INSTINCT HOB 10	<p>COUNTERTOP INDUCTION PLATE - This appliance with two cooking zones has 2 × 12 power levels with two holding functions of 77 to 212°F (25 to 100°C) and a timer function. This Hob is quick to heat up, energy efficient, reliable and convenient to use Dim 380x473x200mm</p>		
150	1		INSTINCT HOB 10	<p>COUNTERTOP INDUCTION PLATE - This appliance with two cooking zones has 2 × 12 power levels with two holding functions of 77 to 212°F (25 to 100°C) and a timer function. This Hob is quick to heat up, energy efficient, reliable and convenient to use Dim 380x473x200mm</p>		

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
151	1		391126	ELECTRIC PASTA COOKER 1X40 LT WELL - Infrared heating system. Constant starch removal during the cooking process. The 40 liter tank is pressed in 316-L type stainless steel to protect against corrosion. Safety thermostat and electromechanical sensor prevent the machine from working without water. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right angled side edges eliminate gaps and possible dirt traps between units.		
151	1		913124	3 ERGON. BASKETS FOR PASTA COOKER 40L		

07_HOT LINE 1

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
152	2			304 S/S WALL HOOD+FILTERS+RECESSED LED LIGHTS - Constructed in 304 AISI stainless steel. Continuously welded joints. Equipped with labyrinth filters in 304 AISI stainless steel, blind panels in 304 AISI stainless steel, grease collecting trough all around and condensate collecting tray.		
152.1	1			STAINLESS STEEL PANELS WITH SHELF GUIDES DIMENSION AS DRAWING		
155	1	Gemm	THBD/090S	GN 1/1 FREEZER LOW TEMPERATURE - Temperature -15/-20°C, Structure: made in stainless steel, Cooling system: ventilated cooling system, Electronic digital control, Defrost: automatic defrosting system with heating elements, Evaporation of condensate water: automatic, Fittings on request: drawer units, Included: 2 GN 1/1 shelves each door		
155.1	1			WORK TOP WITH UPSTAND - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.		
156	2	Electrolux Professional	391340	23LT EL.FRYER HP, EL.CONTROL, PROG, OIL PUMP - High efficiency external infrared heating elements (18kW) with innovative deflectors attached to the outside of the well. Deep drawn V-Shaped well. The unit is equipped with a programmable electronic control panel. Unit predisposed for advanced filtering system. Melting function. Oil drains through a tap into a container positioned under the well; stainless steel filter included. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right-angled side edges eliminate gaps and possible dirt traps between units.		

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
157	1	Arris	FT809EL	FRY TOP DIGITALE MONOBLOCCO - 2 ZONE DI COTTURA - TRIFASE - Piastra elettrica digitale monoblocco di 80 x 90 cm con tecnologia a risparmio energetico. Una speciale costruzione e tecnologia che consente di risparmiare energia pur raggiungendo temperature di circa 300°C. Dimensioni piano cottura (mm) 720x710		
158	1	Electrolux Professional	283012	EL.SALAMANDER, ULTRA RAPID, OPEN 3-SIDES, PLATE DETECT., 600 MM - 400V - Constructed in AISI 304 stainless steel. Table top model can be hanged on the wall with wall brackets (optional). Open on 3 sides. 2 individually controlled cooking zones heated by high efficient infrared heating elements. No preheating needed, reduced heat emission in the kitchen. Control knob to set cooking time (from 0 to 99 minutes) showed on digital display. Touch-controlled plate detecting bar to activate heating elements. Air vents along the upper side for evacuating heat and smoke. Movable plate, sliding smoothly up and down along a rail system. Removable chromed steel cooking grid and stainless steel grease collecting container.		
158	1	Electrolux Professional	283035	WALL MOUNTED BRACKETS KIT FOR SALAMANDERS OPEN ON 3 SIDES		
159	1			WORK TOP WITH UPSTAND - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.		

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
159	1			<p>AMBIENT UNIT 1 HINGED DOOR - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>		
159	1			<p>AMBIENT UNIT 1 HINGED DOOR WITH WASTE COMPARTMENT - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>		
159	1			<p>AMBIENT UNIT WITH 4 DRAWERS - Constructed entirely in 304 AISI stainless steel with front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Drawers in 304 AISI stainless steel with telescopic runners for easy extraction of GN containers. 45° degree internal side corner junction system. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation.</p>		

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
159	1			<p>AMBIENT UNIT 1 HINGED DOOR WITH GUIDES FOR GN 1/1 BASINS - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>		
160	1	Zanussi	392347	<p>ELECTRIC GRILL TOP HP 800MM 380-400 V - Heating via incoloy armoured heating elements positioned under the cooking grid. Cooking surface grids are easily removable for cleaning. Heating elements can be tilted. Integrated water tap. Fixed well with drain. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units. WRAS compliant. 380-400 V.</p>		
160.1	1	Zanussi	391154	<p>OPEN BASE - To be installed below other 900XP top units in island type installations with operations from one side. Open base to store pots, pans, sheet pans etc. Body and internal structure of unit entirely in stainless steel. Delivered with 150 mm height adjustable feet.</p>		
160.2	2	Zanussi	206350	DOOR FOR OPEN BASE CUPBOARD		

08 _ CHEF ISLAND

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
165	1	Electrolux Professional	710017	<p>REFR.COUNTER 290L 4x1/2DRW NOTOP CU_LFT GALV - AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. N. 4X1/2 drawers. Built-in refrigeration unit. Operating temperature: -2+10°C. R290 gas in refrigeration circuit.</p>		
165	1			<p>HOT CUPBOARD WITH SLIDING DOORS - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Fan-assisted heating via armoured elements assures temperature ranges from 30° to 90°C. Removable control panel with mechanical thermostat, green ON/OFF indicator light and orange indicator light for heating element operation.</p>		
165	1	Alto Sham	500-S	<p>HALO HEAT LOW TEMP HOLDING CABINET - Maintain food quality. Keep product at its perfect serving temperature and hold for hours without overcooking or drying out. Easy to operate. Adjustable, electronic thermostat with digital display monitors the inside temperature to ensure food is being held at safe and precise temperatures. Easy to clean. Simply remove shelves and wipe clean.Capacity 3 Full-Size Hotel Pans (4") - 6 Full-Size Hotel Pans (2-1/2") - 3 GN 1/1 Pans (100mm) - 6 GN 1/1 Pans (65mm)</p>		
165.1	1			<p>BUILT-IN HAND SINK INCLUDED IN ITEM 166</p>		
166	1			<p>WORK TOP WITH UPSTAND + REFRIGERATED DISPLAY CASE MADE TO MEASURE - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.</p>		

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
166	1			AMBIENT UNIT 1 HINGED DOOR WITH BIN - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.		
166	1			AMBIENT UNIT 1 HINGED DOOR - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.		
166	1			CUPBOARD BASE FOR SINK TOP - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system.		
166	1			DROP-IN BOWL RIGHT DRAINAGE		
166	1			FAUCET WITH BLACK PLASTIC LEVER		

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
------	------	-------	------	-------------	---------------------	--------------

166	1		JCLASS IN 30 IB ACWG + 6180MP	JCLASS IN 30 IB ACWG + 3-WAY TAP ONLY PURIFIED + FILTER + BOWL AND TAP - Liters per hour 30 Lt/H Continuous liters 7 Lt Water temperature 3/10° Dim 255x400x400 mm		
166.1	1			POLYETYLENE CUTTING BOARD		
166.2	1			REFRIGERATED DISPLAY CASE INCLUDED IN THE TOP, TAILOR-MADE EXECUTION		

09 _ CHARCUTERIE

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
168	1	Electrolu x Professio nal	710017	<p>REFR.COUNTER 290L 4x1/2DRW NOTOP CU_LFT GALV - AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. N. 4X1/2 drawers. Built-in refrigeration unit. Operating temperature: -2+10°C. R290 gas in refrigeration circuit.</p>		
168.1	1			<p>WORK TOP WITH UPSTAND + REFRIGERATED DISPLAY CASE MADE TO MEASURE - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.</p>		
168.1	1			<p>AMBIENT UNIT WITH 4 DRAWERS - Constructed entirely in 304 AISI stainless steel with front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Drawers in 304 AISI stainless steel with telescopic runners for easy extraction of GN containers. 45° degree internal side corner junction system. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation.</p>		

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
168.1	1			<p>AMBIENT UNIT 1 HINGED DOOR + BIN - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>		
168.1	1			<p>AMBIENT UNIT 1 HINGED DOOR - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>		
168.1	1		JCLASS IN 30 IB ACWG + 6180MP	<p>JCLASS IN 30 IB ACWG + 3-WAY TAP ONLY PURIFIED + FILTER - Liters per hour 30 Lt/H Continuous liters 7 Lt Water temperature 3/10° Dim 255x400x400 mm</p>		
168.2	1	Gemm	THBD/090S	<p>GN 1/1 FREEZER LOW TEMPERATURE - Temperature -15/-20°C, Structure: made in staineless steel, Cooling system: ventilated cooling system, Electronic digital control, Defrost: automatic defrozing system with heating elements, Evaporation of condensate water: automatic, Fittings on request: drawer units, Included: 2 GN 1/1 shelves each door</p>		

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
168.3	1			REFRIGERATED DISPLAY CASE INCLUDED IN THE TOP, TAILOR-MADE EXECUTION		
169	2			DOUBLE WALL SHELF WITH BRACKETS		
170	1	Alto Sham	100-HW/D6	WATERLESS HOT FOOD WELL - Extend food holding times with efficient, precise Halo Heat® technology Maintain food quality without the use of extremely hot elements, added humidity or fans Increase sales with attractive food presentation and quality Provide optimal holding temperatures with an adjustable thermostat that can be flush-mounted into the counter or a location out of sight from customers Dim Exterior 225mm x 380mm x 586mm		
171	1	Berkel	Volano B3	FLYWHEEL MANUAL SLICER B3 RED - Blade diameter 300 mm Blade material 100Cr6 Cut thickness 0 - 1,5 mm Cut Capacity Circle 210 mm Cut Capacity Rectangular 270x210 mm Details Matt details and finishes, screw mechanism for opening the blade guard. Removable parts slice guard deflector; Receiving Plate; Meat table Sharpener included, 2-movements type		

10 _ PIZZA

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
172	1			WORK TABLE WITH UPSTAND WITH POLYETYLENE CUTTING BOARD		
175	1	Margot Food Machine	Genius Classic D6L + Zero Fumi 6L + Proofer	TWO-CHAMBER PIZZA OVEN WITHOUT CHIMNEY + PROOFER + REFRIGERATED CONDENSING HOOD WITHOUT FLUE - For Chamber: External dimensions 1440x1010x40 mm, Internal dimensions 1050x700x150, max absorption kw 9, Temperature 0-460°C, N. 6 pizzas diameter 350 mm, N. 2 pans 600x400 mm		
176	1	Gemm	TG7D/090S	GN 1/1 REFRIGERATED COUNTER NORMAL TEMPERATURE - Temperature -2/+8°C, Structure: made in staineless steel, Cooling system: ventilated cooling system, Electronic: digital control, Defrost: automatic defrozing system with heating elements, Evaporation of condensate water: automatic, Included 1 GN 1/1 shelf each door		
176.1	1			WORK TOP WITH UPSTAND + REFRIGERATED DISPLAY CASE MADE TO MEASURE - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.		
176.1	1			AMBIENT UNIT 1 HINGED DOOR + GN 1/1 BASIN GUIDES - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to		
176.1	1		JCLASS IN 30 IB ACWG + 6180MP	JCLASS IN 30 IB ACWG + 3-WAY TAP ONLY PURIFIED + FILTER + BOWL AND TAP - Liters per hour 30 Lt/H Continuous liters 7 Lt Water temperature 3/10° Dim 255x400x400 mm		
176.2	1			REFRIGERATED DISPLAY CASE INCLUDED IN THE TOP, TAILOR-MADE EXECUTION		

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
------	------	-------	------	-------------	---------------------	--------------

177	2			DOUBLE WALL SHELF WITH BRACKETS		
				LOW-TEMPERATURE HOT-FOOD HOLDING		
				CABINET - Simple and intuitive pushbutton control that commands all appliance functions with easily identifiable icons		
178	1	Alto Sham	1200-UP	Halo Heat—a controlled, uniform heat source that gently surrounds food for better appearance, taste, and longer holding life		
				Stainless steel interior resists corrosion		
				Digital control senses temperature drops faster, providing quick heat recovery time		
				Dim Exterior 1924mm x 671mm x 817mm		

11 _ WINE BAR

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
185	1		ICBDEC3050 W	<p>COLUMN WINE CELLAR - Dimensions: 2134x762x610 mm (HxWxD) Capacity 146 bottles Energy efficiency class G Two separate temperature zones allow you to set the ideal temperatures (+4°C, +18°C) for both serving and storing wine Silent compressor with anti-vibration system Double cooling system thanks to double evaporator Interior light independent of door opening Fully pull-out shelves for easy access to bottles</p> <p>BAR COUNTER - WORK TOP 2MM, S/S REINFORCEMENT, R=10 EDGE AND NON-DRIP EDGE N. 2 SIDESPALSH FOR WORK TOP WITH ROUNDED EDGE BACKSPLASH FOR BARCOUNTER, N. 2 OUTLET 230V, N. 2 PRESA ETHERNET N. 2 DRAINER ON WORK TOP 2 MM THICK, N. 2 WELDED WELL 300X240X170H N. 2 SINGLE HOLE ELBOW MIXING TAP, STANDARD WASTE CHUTE, DRIP PAN 200X200, WATER SPRAY FOR GLASSES COCKTAIL STATION SINGLE, 860X430 WITH 7 BASINS E 3 DIVIDORS GARNISH RAIL (NOT WELDED), INTEGRATED SPEED RAIL L=900 CHEST OF TWO DRAWERS FOR BOTTLES WITH FULTERER RUNNERS AND BUMPER, STANDARD, 200X665X760H REFRIGERATED COUNTER, FULLY OUTFITTED FOR REMOTE COMPRESSOR ON RIGHT-HAND SIDE, FREON R452A, 2 DOORS GN1/1, 1210X565X620 -2/+8°C W360 EVAPORATOR INSIDE OF COOL COMPARTMENT N. 2 EXTRA CHARGE FOR DRAWER GN1/1 WITH S/S TELESCOPIC RUNNERS FOR VENTILATED REFRIGERATED UNITS 470H N. 2 WASTE BIN UNDERCOUNTER WITH SWING DOOR AND TIPPING OPENING. STANDARD.</p> <p>REMOTE UNIT-2+10°C 670L REF+HD COUNTERS-R134a INCLUDED REFRIGERATED LINE, PLACED IN THE FALSE CEILING</p>		
186/187/189/190/191/192/195/196	1					
		RIVACOLD				

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
188	1		ICBDEC3050 W	COLUMN WINE CELLAR - Dimensions: 2134x762x610 mm (HxWxD) Capacity 146 bottles Energy efficiency class G Two separate temperature zones allow you to set the ideal temperatures (+4°C, +18°C) for both serving and storing wine Silent compressor with anti-vibration system Double cooling system thanks to double evaporator Interior light independent of door opening Fully pull-out shelves for easy access to bottles		
199/201	2	MAHLKO NING	EK43	COFFEE GRINDER - Grinding capacity - 1200-1500 Gr/Min - Burners Ø 98mm		
200	1	LA MARZOC CO	GB5S2AV	2-GROUP COFFEE MACHINE		

12 _ WINE STORAGE

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
205	1		ICBDEC2450 W	COLUMN WINE CELLAR - Capacity 102 bottles, Energy efficiency class G, Two separate temperature zones allow you to set the ideal temperatures (+4°C, +18°C) for both serving and storing wine, Interior light independent of door opening, Fully pull-out shelves for easy access to bottles		
206	1		ICBDEC2450 W	COLUMN WINE CELLAR - Capacity 102 bottles, Energy efficiency class G, Two separate temperature zones allow you to set the ideal temperatures (+4°C, +18°C) for both serving and storing wine, Interior light independent of door opening, Fully pull-out shelves for easy access to bottles		
207	1		ICBDEC2450 W	COLUMN WINE CELLAR - Capacity 102 bottles, Energy efficiency class G, Two separate temperature zones allow you to set the ideal temperatures (+4°C, +18°C) for both serving and storing wine, Interior light independent of door opening, Fully pull-out shelves for easy access to bottles		
208	1			ICE CONTAINER INCORPORATED IN THE ICE MAKER		
208.1	1			SCOOP HOLDER		
209	1	Hoshizaki	KM-140C-HC	ICE MAKER The KM-140C-HC self-contained ice maker produces clear, curved shape ice cubes that are extremely versatile. The benefits of "crescent" shaped ice cubes extend from "splash-free" serving of post mix soft drinks, through to beverage bottles and cans display for impulse purchase. Also ideal for wine and champagne bottles chilling in ice buckets without the addition of water, long drinks & popular Caribbean cocktails preparation and even fish display counters. It's ideal for fast selling establishments such as nightclubs, sporting and entertainment venues.		
209.1	1			EVERPURE		
210	1			FLOOR TROUGH		

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
211	1			WINE BOTTLE RACK - NOT PROVIDED BY US		
212	1			WINE BOTTLE RACK - NOT PROVIDED BY US		
215	1			WINE BOTTLE RACK - NOT PROVIDED BY US		
216	1			WINE BOTTLE RACK - NOT PROVIDED BY US		
217	1			EVERPURE		
218	1		121129/S	<p>WORK TOP WITH UPSTAND - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.</p>		
219	1	Bunn	44050.0250	<p>TF SERVER GEN3 1.5G/5,7L - Vacuum insulated to keep coffee hot for hours Brew-through design with flip lid cover Soft-grip bail handle for easy transportation Integrated sight gauge assembly allows for easy cleaning Sturdy aluminum faucet guard keeps faucet area clean and protected Fast flow faucet</p>		
220	2	Bunn	53100.0502 + 36725.0000 + 51746.0001	<p>ICBA, CE 220-240V EURO NG COFFEE BREWER + 3,8 L AIRPOT + THERMOS 1,9 L - Electronic funnel lock prevents removal of each brew funnel until drip- through is complete - Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing. Energy-saver mode reduces tank temperature during idle periods</p>		
221	1	Electrolux Professional	710003	<p>REFR.COUNTER 290L 2xDOOR REM CU_LFT GALV - AISI 304 - stainless steel panels, AISI 430 bottom panel, galvanized back panel. Worktop thickness 50mm. N. 2 full doors. Operating temperature: - 2+10°C. R134a gas in refrigeration circuit. Supplied with 1 grid for each door compartment</p>		

ITEM	Q.TY	BRAND	CODE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
221	1	RIVACOL D		REMOTE UNIT-2+10°C 670L REF+HD COUNTERS- R134a INCLUDED REFRIGERATED LINE		

13 _ CHAMPAGNE BAR

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
230/23 1/232/ 235/23 6/238/ 239	1			BAR COUNTER - WORK TOP 2MM, S/S REINFORCEMENT, R=10 EDGE AND NON-DRIP EDGE N. 2 SIDESPALSH FOR WORK TOP WITH ROUNDED EDGE BACKSPLASH FOR BARCOUNTER N. 2 OUTLET 230V, N. 2 PRESA ETHERNET N. 2 DRAINER ON WORK TOP 2 MM THICK, N. 2 WELDED WELL 300X240X170H N. 2 SINGLE HOLE ELBOW MIXING TAP, STANDARD, WASTE CHUTE DRIP PAN 200X200, WATER SPRAY FOR GLASSES COCKTAIL STATION SINGLE, 860X430 WITH 7 BASINS E 3 DIVIDORS GARNISH RAIL (NOT WELDED) INTEGRATED SPEED RAIL L=900 N. 2 WASTE BIN UNDERCOUNTER WITH SWING DOOR AND TIPPING OPENING, STANDARD, 400X665X760H, NICHE OPEN CABINET WITH INTERMEDIATE SHELF, STANDARD, 400X600X760 REFRIGERATED COUNTER, FULLY OUTFITTED FOR REMOTE COMPRESSOR ON RIGHT-HAND SIDE, FREON R452A, 2 DOORS GN1/1, 1210X565X620 -2/+8°C W360 EVAPORATOR INSIDE OF COOL COMPARTMENT N. 2 EXTRA CHARGE FOR DRAWER GN1/1 WITH S/S TELESCOPIC RUNNERS FOR VENTILATED REFRIGERATED UNITS 470H TIPPING WASTE BIN, STANDARD (TELESCOPIC RUNNERS WITHOUT BUMPER) S/S SOCLE 600MM DEEP PANELLING SUPPORT H 1100MM **CLADDING NOT SUPPLIED		
	1	RIVACOL D		REMOTE UNIT-2+10°C 670L REF+HD COUNTERS- R134a INCLUDED REFRIGERATED LINE, PLACED IN THE FALSE CEILING		
237	1	HOBART	PROFI GX-10C	GLASSWASHERS - Self-cleaning washing system Control of dishwasher operation also through smart devices USB interface Cold rinsing Filter position control Bowl capacity 10.6 l Pool heating 1.7 kw Baskets 500x500 mm		

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
------	------	-------	--------	-------------	---------------------	--------------

239.1	2			CHAMPAGNE DISPLAY - Made of AISI 304 stainless steel with finishes as per drawing. Remote refrigeration with automatic defrost evaporator positioned on the roof. Adjustable plexiglass internal shelves. Remote digital display for temperature reading. Universal locking key. Construction as per drawing		
-------	---	--	--	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--	--

239.2	2	RIVACOLD		REMOTE UNIT-2+10°C 670L REF+HD COUNTERS-R134a INCLUDED REFRIGERATED LINE, PLACED IN THE FALSE CEILING		
-------	---	----------	--	--------------------------------------------------------------------------------------------------------------	--	--

14 _ RAW BAR

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
245/24 7/248/ 249/25 1/252	1			BAR COUNTER + N. 1 REFRIGERATED DISPLAY CASE SELF-COOLING - WORK TOP 1,5MM, WOODEN REINFORCEMENT, R=10 EDGE, WITH NON-DRIP EDGE, WITH BACKSPLASH N. 2 S/S WORKTOP UNDERPANEL N. 2 SIDESPALSH FOR WORK TOP WITH ROUNDED EDGE N. 2 RADIUSSED REAR EDGES, BACKSPLASH FOR BARCOUNTER N. 2 OUTLET 230V, N. 2 PRESA ETHERNET DRAINER ON WORK TOP 1,5 MM THICK WELDED WELL 500X400X250H SINGLE HOLE ELBOW MIXING TAP, STANDARD FREEZER COUNTER, FULLY OUTFITTED FOR REMOTE COMPRESSOR ON RIGHT-HAND SIDE, FREON R452A, 1 DOOR GN1/1, DIM. 745X665X850 -18/-22°C W550, NICHE REFRIGERATED COUNTER WITHOUT WORKTOP, FULLY OUTFITTED FOR REMOTE COMPRESSOR ON LINKS-HAND SIDE, 2 DOORS GN1/1, DIM. 1210X665X760 N. 2 ADDITIONAL VALUE FOR CHEST OF DRAWERS 2X1/2 GN1/1 WITH S/S TELESCOPIC RUNNERS FOR VENTILATED REFRIGERATED UNITS 760H NICHE TIPPING WASTE BIN, STANDARD (TELESCOPIC RUNNERS WITHOUT BUMPER) PLINTHE PANELLING SUPPORT, REFRIGERATED DISPLAY CASE SELF-COOLING 1450X380X275MM **CLADDING NOT SUPPLIED		
1		RIVACOL D		REMOTE UNIT FOR FREEZER 670L CABINETS & 2+3 COMP. COUNTERS-R452 INCLUDED REFRIGERATED LINE, PLACED IN THE FALSE CEILING		
1		RIVACOL D		REMOTE UNIT-2+10°C 670L REF+HD COUNTERS- R134a INCLUDED REFRIGERATED LINE, PLACED IN THE FALSE CEILING		

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION	PREZZO NETTO CAD	TOTALE NETTO
252	2			RAW BAR DISPLAY - REFRIGERATION FROM ABOVE Made of AISI 304 stainless steel with finishes as per drawing. Remote refrigeration with automatic defrost evaporator. Adjustable plexiglass internal shelves. Remote digital display for temperature reading. Universal locking key.		
	2	RIVACOLD		REMOTE UNIT-2+10°C 670L REF+HD COUNTERS-R134a INCLUDED REFRIGERATED LINE - PLACED IN THE FALSE CEILING		
246	1			TRAY TROLLEY - WORK TOP 1,5MM WOODEN REINFORCEMENT 90° EDGE, WITHOUT NON-DRIP EDGE, 400X700X50 GN 1/1 CABINET WITH SLIDES H=700, STANDARD KIT OF S/S-WHEELS WITH PIVOT, BASIC LINE		
250	1	HOSHIZAKI	FM-80KE-HC	ICE MAKER SELF CONTAINED - Production Capacity (kg/24h) approx. (AT 10°C, WT 10°C) 85 Storage bin capacity (kg) approx. 26 Power Supply 1/220 - 240V/50Hz Electric Consumption (kW) 0.27 Heat Rejection (AT 32°C, WT 21°C) (kW) 0.45 Dimensions of Legs (mm) Including legs at 89 mm Ice type Flake		