

COMUNE DI MILANO


CONSTRUCTION DOCUMENTATION

Property
AST VENEZIA S.R.L.

Via Borgonuovo, 9
20121 Milano

Tenant
RH MILAN S.R.L.

Vicolo San Giovanni sul muro, 9
20121 Milano

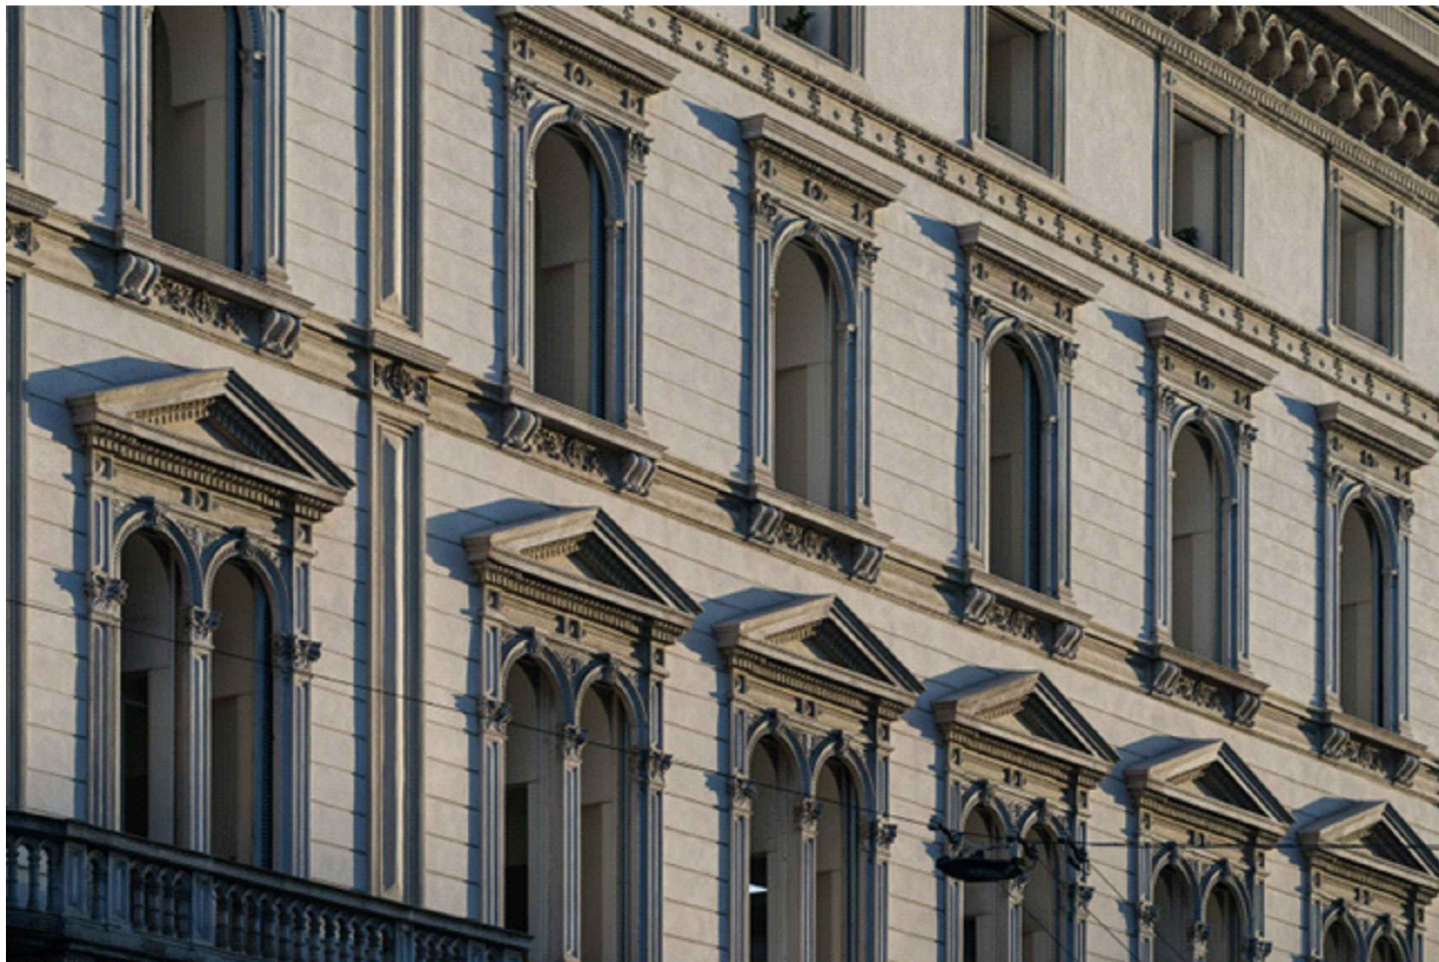

CONSULTANT'S TEAM



BMS Progetti s.r.l.

piazza santissima trinità 6
20154 milano

bmsprogetti.it

Designer
ing. Aldo Bottini

Consultants
SMP studio
PAN studio
Jensen Hughes

Ristrutturazione Edilizia - Corso Venezia 56

TITLE

Relazione Tecnica attrezzature

SCALE

DOCUMENT

20011 P E F&B R01

ISSUE

28/03/2025

REV	DATE	DESCRIPTION	EDITED	VERIFY	APPROVED
00	28/03/2025	Tender package	MR	CC	AM

**PE
F&B
R01**

BMS

CORSO VENEZIA 56, MILANO

00	28.03.2025	Tender Package	MR	CC	AM
REV.	DATA	OGGETTO	REDAZIONE	CONTROLLO	APPROVAZ.

INDEX

1	Premessa	4
2	Organizzazione generale del progetto Food	5
3	Percorsi	7
4	Attrezzature	8
4.1	Piano B01 Ristorante	9
4.2	Piano B01 Ristorante	46

1 Premessa

Gli elaborati grafici e descrittivi Esecutivi e per l'Appalto a cui la presente Relazione Tecnica fa riferimento, sono stati redatti e sviluppati da SMP sulla base dei Progetti e delle indicazioni progressivamente fornite a BMS dalla Committente RH.

Tali progetti e specifiche fornite da RH sono state oggetto da parte di SMP delle seguenti verifiche e analisi:

- Analisi della rispondenza del progetto RH alle Norme Igienico Sanitarie Comunali apportando le dovute osservazioni.
- Valutazione della reperibilità delle attrezzature richieste da RH sul mercato Italiano sia in termini commerciali che in termini di garanzie manutentive e ricambi, fornendo le possibili alternative.

Oltre a tali attività durante lo sviluppo e aggiornamento degli elaborati Esecutivi e per l'appalto SMP ha anticipato, per il cantiere in via di realizzazione, i primi schemi base per le opere impiantistiche relative agli allacciamenti delle attrezzature al fine di permettere la realizzazione dei sottofondi e delle opere edili di base.

2 Organizzazione generale del progetto Food

Il completo sistema Food del Ristorante, posto al piano Terra e ai piani B01 e B02, si articola come segue:

■ Piano Terra:

- **Cortile su Viale Maino** con accesso attraverso passo carraio di servizio per logistica merci, montacarichi con accesso ai livelli B01 e B02 per trasporto merci e risalita rifiuti. Piazzuola raccolta Rifiuti.

Tali aree e funzioni sono tra loro separate e funzionalmente autonome come pure la loro visibilità e accessibilità, rispetto alle aree destinate ai clienti della esposizione al Piano Terra, è impedita da una recinzione con verde ed essenze arboree.

- **Ingresso pedonale su viale Maino** per ingresso/uscita dipendenti dalle aree Food/Ristorante opportunamente monitorato e controllato.

■ Piano B01 Ristorante: Tale piano è destinato per la sua completa superficie alla sala Ristorante e alle aree produttive ed in particolare:

- **Sala da Pranzo** con circa N°60 posti a sedere, corredata dell'area di accesso con i relativi servizi di accoglienza clienti, guardaroba e servizi igienici per il pubblico.

La sala da pranzo è articolata con sedute poste lungo l'asse centrale ed è illuminata naturalmente attraverso un lucernario emergente rispetto al cortile al piano terra.

Il lucernario oltre a fornire una scenografica luce zenitale è previsto con aperture automatiche per lo smaltimento dei fumi in caso di incendio.

Sul lato sinistro rispetto al flusso di ingresso sono posti banchi di servizio con funzioni e destinazioni diverse.

- **Banchi di servizio** con circa N° 36 posti a sedere e per servizio Sala quali:

- Wine Bar
- Champagne Bar
- Raw Bar

- **Aree di lavoro e produttive:** dotate di area arrivo merci con primo stoccaggio secco di giornata, zone di preparazione prodotti, garm, aree cottura primi, secondi, banco chef con impiattamento, charcuterie, pizza, area lavaggio piatti, deposito pulizie e vini.

Ciascuna di tali aree, completa delle attrezzature specifiche, in sé autonoma per svolgere l'attività produttiva richiesta, è funzionalmente collegata alle altre per lo sviluppo e completamento del ciclo produttivo secondo i menù programmati.

Sopra a ciascuna area destinata alla cottura sono previste cappe a flusso bilanciato per l'evacuazione delle fumane.

L'area cottura pizza sarà dotata di un forno con integrata cappa a condensazione in sostituzione della cappa tradizionale non installabile per ragioni dimensionali.

- **Area lavaggio piatti e bicchieri**, collocata nel lato opposto delle aree preparazioni e cottura, dotata di specifico e autonomo ingresso per il rientro dalla sala dei piatti sporchi, come pure di uscita del pulito verso le aree di impiattamento.

- **Piano B02 Aree di preparazioni/servizio**: Tale piano è articolato in N° 4 aree tra loro distinte e collegate con corridoi e così destinate:

- **Area Preparazioni**: corredata da area scaffalata per deposito secco, Celle frigorifere per prodotto fresco da lavorare, banchi di preparazione prodotti freddi, Banchi produzione impasto pizza, banchi frigoriferi per mantenimento prodotto crudo da inviare al B01 per completamento e/o cottura.
- **Area deposito**: per lo stoccaggio di bevande in temperatura
- **Area locale rifiuti**: locale ventilato, rifinito come da norma e corredato dalle attrezzature di compattazione.
- **Area Spogliatoi**: destinato agli addetti Food, suddiviso per sessi, dotato dei servizi igienici, lavelli, docce e armadietti come da norma.

Tutti i materiali di finitura riguardanti pareti, pavimenti e soffitti saranno realizzati nella logica del massimo rispetto delle norme igieniche/sanitarie.

Tutte tali aree sono tra loro organizzate e coerenti con le logiche operative previste da RH e nella logica del rispetto igienico/sanitario.

3 Percorsi

- **Per i prodotti i materiali, e i rifiuti:** tutti i prodotti e materiali in entrata e uscita per l'esercizio ristorativo del Ristorante entreranno dal cancello del passo carraio su V.le Maino e raggiungeranno il livello B01 e B02 tramite il montacarichi dedicato posto nell'apposito cortile di servizio.
Dal montacarichi i prodotti saranno trasportati su piccoli carrelli/transpallet verso ciascuna specifica area transitando nei corridoi come previsto negli elaborati grafici.
- **Per il Personale:** tutto il personale del Ristorante accederà alle aree di lavoro ai piani B01 e B02 attraverso l'ingresso pedonale su V.le Maino. Attraverso la scala protetta dagli agenti atmosferici accederà prima agli spogliatoi al piano B02 e successivamente alle zone operative ai piani B01 e B02.
- **Per il Pubblico:** i clienti del Ristorante accederanno dall'ingresso principale dell'edificio posto su C. Venezia N° ove sarà posta anche l'insegna ed il menù previo il rispetto dei vincoli imposti dalla Soprintendenza. Successivamente i clienti scenderanno al livello del Ristorante B01 utilizzando lo specifico scalone o gli ascensori dedicati.

4 Attrezzature

Qui di seguito l'elenco schematico delle attrezzature previste nel Progetto Esecutivo e per l'appalto da intendersi comunque non esaustivo e da integrare con quanto riportato in tutti gli elaborati grafici e descrittivi di cui al progetto.

4.1 Piano B01 Ristorante

01 _ DISH WASH & POLISH

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
100.1	2	Cambro	CBU214872V 4580	STORAGE SHELVING, 4 GRILLED SHELVES
100.2	1	Cambro	CBU213672V 4580	STORAGE SHELVING, 4 GRILLED SHELVES
101	1			<p>WORK TOP WITH UPSTAND - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.</p> <p>GLASSWASHER - Self-cleaning washing system Control of dishwasher operation also through smart devices USB interface</p>
105	1	Hobart	PROFI GX-10C	<p>Cold rinsing Filter position control Bowl capacity 10.6 l Pool heating 1.7 kw Baskets 500x500 mm</p>
107	1		642010/S	<p>304 S/S WALL HOOD+FILTERS - Constructed in 304 AISI stainless steel. Continuously welded joints. Equipped with labyrinth filters in 304 AISI stainless steel, blind panels in 304 AISI stainless steel, grease collecting trough all around and condensate collecting tray.</p>
108	1	Hobart	PROFI AMX-10B	<p>HOOD-TYPE DISHWASHER - 6 automatic cycles: short, standard, intensive, starch-removal, permanent, hygiene - Strainer soil sensor - Integrated Wi-Fi module - Self-cleaning programme - USB-interface for comfortable download of operational data - Rack size 500x500 mm</p>

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
109	1			WORK TOP WITH UPSTAND - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.
109	1			DROP-IN BOWL RIGHT DRAINAGE
109	1			CUPBOARD BASE FOR SINK TOP - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system.
109	1			FAUCET WITH BLACK PLASTIC LEVER
109	1			SHOWER GROUP + WALL MIXER WITH BLACK PLASTIC LEVER 23.70 CM AND UPPER FUSED SPOUT 30 CM
109.1	3	Metalcarr elli	2102TR	WHEELED WASTE COLLECTOR, CAP. 135 LT - AISI 304 stainless steel waste container, brushed finish Watertight pressed bottom with no sharp edges Manual opening lid: 1/2+1/2 Wheel-mounted
109.2	1			WALL MOUNTED SHELF FOR BASKETS - Constructed in 304 AISI stainless steel. Square 25x25mm tubular frame. Fitted with bottom tray and drain hole. Designed for baskets 500x500mm.
109.3	1			SOLID WALL SHELF WITH BRACKETS
110	1			PRE-RINSE FAUCET ASSEMBLY INCLUDED IN ITEM 109

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
112	1			WORK TABLE WITH UPSTAND REAR AND SIDE RIGHT AND LEFT, SUBFRAME - The 50mm high worktop in 304 AISI stainless steel, 1mm in thickness, has upturned edges and incorporates a layer of sound deadening, waterproof and fireproof material. Integral radiused rear upstand, h=100mm. Square section legs 40x40mm on 1" height-adjustable feet in 304 AISI stainless steel.
115	1			SOLID WALL SHELF WITH BRACKETS
116	5		361238	DISHWASHER RACK DOLLY 500 MM

02_ JANITOR

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
				JANITOR
121	1			CLOSED CABINET WITH HINGED DOOR MADE ENTIRELY OF AISI 304 STAINLESS STEEL WITH SCHOTCH BRITE FINISH INTERNAL COMPARTMENT COMPLETES WITH BATHTUB AND TAP
122	1	Cambro	CBU1830V5	STORAGE SHELVING, 5 GRILLED SHELVES

03 _ POT WASH

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
125	1			DROP-IN BOWL RIGHT DRAINAGE
126	1	HUPFER	112465	GASTRONORM TROLLEY FOR 7 × GN - Gastronorm trolley in low version for storing GN 1/1 containers and associated partition elements.
127	1			WORK TOP WITH UPSTAND + N. 2 PREP SINK The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.
127	1			AMBIENT UNIT 1 HINGED DOOR 600MM Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
127	1			<p>AMBIENT UNIT WITH 4 DRAWERS Constructed entirely in 304 AISI stainless steel with front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Drawers in 304 AISI stainless steel with telescopic runners for easy extraction of GN containers. 45° degree internal side corner junction system. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation.</p>
127	1			<p>AMBIENT UNIT 1 HINGED DOOR WITH HOPPER DUSTBIN Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>
127	1			<p>AMBIENT UNIT 1 HINGED DOOR Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>
127	1			SHOWER UNIT + WALL-MOUNTED MIXER
127	1			FAUCET WITH BLACK PLASTIC LEVER
127.1	1			N. 2 PREP SINK INCLUDED IN ITEM 127

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
128	1			SOLID WALL SHELF WITH BRACKETS
128.1	1			SOLID WALL SHELF WITH BRACKETS
129	1	Cambro	CBU244872V 4580	STORAGE SHELVING, 4 GRILLED SHELVES

04 PREPARATION

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
130	1			<p>WORK TOP WITH UPSTAND - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.</p>
130	1			<p>AMBIENT UNIT 1 HINGED DOOR - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>
130	1			<p>AMBIENT UNIT 1 HINGED DOOR WITH HOPPER DUSTBIN - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
130	1			AMBIENT UNIT WITH 4 DRAWERS - Constructed entirely in 304 AISI stainless steel with front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Drawers in 304 AISI stainless steel with telescopic runners for easy extraction of GN containers. 45° degree internal side corner junction system. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation.
130	1			FAUCET WITH BLACK PLASTIC LEVER
130	1			DROP-IN BOWL RIGHT DRAINAGE
130.1	1			PREP SINK INCLUDED IN ITEM 130
131	4			WALL SHELF WITH BRACKETS
132	1	Electrolux Professional	710000	REFR.COUNTER 290L 2xDOOR NOTOP CU_LFT GALV - AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. N. 2 full doors. Built-in refrigeration unit. Operating temperature: -2+10°C. R290 gas in refrigeration circuit. Supplied with 1 grid for each door compartment

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
------	------	-------	------	-------------

136 1

WORK TOP WITH UPSTAND + REFRIGERATED DISPLAY CASE MADE TO MEASURE - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.

136 1

AMBIENT UNIT 1 HINGED DOOR + N. 2 INFILL PANELS - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.

136 1

AMBIENT UNIT 1 HINGED DOOR + BIN-
Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
136	1			AMBIENT UNIT 1 HINGED DOOR WITH GN BOWL HOLDER GUIDES 1/1 - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.
136	1			DROP-IN BOWL RIGHT DRAINAGE
136	1			FAUCET WITH BLACK PLASTIC LEVER
136	1		JCLASS IN 30 IB ACWG + 6180MP	JCLASS IN 30 IB ACWG + 3-WAY TAP ONLY PURIFIED + FILTER + BOWL AND TAP - Liters per hour 30 Lt/H Continuous liters 7 Lt Water temperature 3/10° Dim 255x400x400 mm
136.1	1			BUILT-IN HAND SINK INCLUDED IN ITEM 136
136.2	1	Electrolux Professional	710017	REFR.COUNTER 290L 4x1/2DRW NOTOP CU_LFT GALV - AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. N. 4X1/2 drawers. Built-in refrigeration unit. Operating temperature: -2+10°C. R290 gas in refrigeration circuit.
136.3	1			REFRIGERATED DISPLAY CASE INCLUDED IN THE TOP, TAILOR-MADE EXECUTION
137	2			SOLID WALL SHELF WITH BRACKETS

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
138	1	Electrolux Professional	710000	REFR.COUNTER 290L 2xDOOR NOTOP CU_LFT GALV - AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. N. 2 full doors. Built-in refrigeration unit. Operating temperature: -2+10°C. R290 gas in refrigeration circuit. Supplied with 1 grid for each door compartment
140	1	Hupfer	112775	GASTRONORM TROLLEY FOR 18 × GN

06 _ HOT LINE 2

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
------	------	-------	------	-------------

304 S/S WALL HOOD+FILTERS+LED LIGHTS -

Constructed in 304 AISI stainless steel.

Continuously welded joints. Equipped with labyrinth filters in 304 AISI stainless steel, blind panels in 304 AISI stainless steel, grease collecting trough all around and condensate collecting tray.

141 1

141.2 1 Ansul

FIRE SUPPRESSION SYSTEM

141.3 1

**STAINLESS STEEL PANELS WITH SHELF GUIDES
DIMENSION AS DRAWING**

**N. 2 RATIONAL ICOMBI PRO OVEN 6 GN 1/1 + KIT
COMBI DUO + STANDARD SUBFRAME OPEN ON**

ALL SIDES Meals per day: 30-100, Connected power: 10.8 kw, Voltage: 3 NAC 400 V, Width: 850 mm, Depth (including door handle): 775 mm (842 mm), Height (including ventilation hose): 754 mm (804 mm)

142 1

CB1ERRA,000
0103 +
60.73.991 +
60.31.200

142.1 1

EVERPURE

WORK TOP WITH UPSTAND The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.

145 1

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
145	1			<p>AMBIENT UNIT 1 HINGED DOOR - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>
145	1			<p>AMBIENT UNIT 1 HINGED DOOR + GN 1/1 BASIN GUIDES - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>
146	1		391126	<p>ELECTRIC PASTA COOKER 1X40 LT WELL - Infrared heating system. Constant starch removal during the cooking process. The 40 liter tank is pressed in 316-L type stainless steel to protect against corrosion. Safety thermostat and electromechanical sensor prevent the machine from working without water. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right angled side edges eliminate gaps and possible dirt traps between units.</p>
146	1		913124	<p>3 ERGON. BASKETS FOR PASTA COOKER 40L</p>

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
147	1			<p>WORK TOP WITH UPSTAND - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.</p>
147.1	1		BRS/120	<p>GN 1/1 REFRIGERATED BASE UNIT FOR 650/700 COOKING TOPS - Dimensions 1200×640×610 mm, Temperature -2/+8°C, Doors 2 Cooling unit plug-in unit, Capacity (l) 162, Capacity GN 1/1 racks</p>
148	1		INSTINCT HOB 10	<p>COUNTERTOP INDUCTION PLATE - This appliance with two cooking zones has 2 × 12 power levels with two holding functions of 77 to 212°F (25 to 100°C) and a timer function. This Hob is quick to heat up, energy efficient, reliable and convenient to use Dim 380x473x200mm</p>
149	1		INSTINCT HOB 10	<p>COUNTERTOP INDUCTION PLATE - This appliance with two cooking zones has 2 × 12 power levels with two holding functions of 77 to 212°F (25 to 100°C) and a timer function. This Hob is quick to heat up, energy efficient, reliable and convenient to use Dim 380x473x200mm</p>
150	1		INSTINCT HOB 10	<p>COUNTERTOP INDUCTION PLATE - This appliance with two cooking zones has 2 × 12 power levels with two holding functions of 77 to 212°F (25 to 100°C) and a timer function. This Hob is quick to heat up, energy efficient, reliable and convenient to use Dim 380x473x200mm</p>

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
151	1		391126	ELECTRIC PASTA COOKER 1X40 LT WELL - Infrared heating system. Constant starch removal during the cooking process. The 40 liter tank is pressed in 316-L type stainless steel to protect against corrosion. Safety thermostat and electromechanical sensor prevent the machine from working without water. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right angled side edges eliminate gaps and possible dirt traps between units.
151	1		913124	3 ERGON. BASKETS FOR PASTA COOKER 40L

07_HOT LINE 1

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
152	2			304 S/S WALL HOOD+FILTERS+RECESSED LED LIGHTS - Constructed in 304 AISI stainless steel. Continuously welded joints. Equipped with labyrinth filters in 304 AISI stainless steel, blind panels in 304 AISI stainless steel, grease collecting trough all around and condensate collecting tray.
152.1	1			STAINLESS STEEL PANELS WITH SHELF GUIDES DIMENSION AS DRAWING
155	1	Gemm	THBD/090S	GN 1/1 FREEZER LOW TEMPERATURE - Temperature -15/-20°C, Structure: made in staineless steel, Cooling system: ventilated cooling system, Electronic digital control, Defrost: automatic defrozing system with heating elements, Evaporation of condensate water: automatic, Fittings on request: drawer units, Included: 2 GN 1/1 shelves each door
155.1	1			WORK TOP WITH UPSTAND - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.
156	2	Electrolu x Professio nal	391340	23LT EL.FRYER HP, EL.CONTROL, PROG, OIL PUMP - High efficiency external infrared heating elements (18kW) with innovative deflectors attached to the outside of the well. Deep drawn V-Shaped well. The unit is equipped with a programmable electronic control panel. Unit predisposed for advanced filtering system. Melting function. Oil drains through a tap into a container positioned under the well; stainless steel filter included. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right-angled side edges eliminate gaps and possible dirt traps between units.

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
157	1	Arris	FT809EL	FRY TOP DIGITALE MONOBLOCCO - 2 ZONE DI COTTURA - TRIFASE - Piastra elettrica digitale monoblocco di 80 x 90 cm con tecnologia a risparmio energetico. Una speciale costruzione e tecnologia che consente di risparmiare energia pur raggiungendo temperature di circa 300°C. Dimensioni piano cottura (mm) 720x710
158	1	Electrolux Professional	283012	EL.SALAMANDER, ULTRA RAPID, OPEN 3-SIDES, PLATE DETECT., 600 MM - 400V - Constructed in AISI 304 stainless steel. Table top model can be hanged on the wall with wall brackets (optional). Open on 3 sides. 2 individually controlled cooking zones heated by high efficient infrared heating elements. No preheating needed, reduced heat emission in the kitchen. Control knob to set cooking time (from 0 to 99 minutes) showed on digital display. Touch-controlled plate detecting bar to activate heating elements. Air vents along the upper side for evacuating heat and smoke. Movable plate, sliding smoothly up and down along a rail system. Removable chromed steel cooking grid and stainless steel grease collecting container.
158	1	Electrolux Professional	283035	WALL MOUNTED BRACKETS KIT FOR SALAMANDERS OPEN ON 3 SIDES
159	1			WORK TOP WITH UPSTAND - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
159	1			<p>AMBIENT UNIT 1 HINGED DOOR - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>
159	1			<p>AMBIENT UNIT 1 HINGED DOOR WITH WASTE COMPARTMENT - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>
159	1			<p>AMBIENT UNIT WITH 4 DRAWERS - Constructed entirely in 304 AISI stainless steel with front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Drawers in 304 AISI stainless steel with telescopic runners for easy extraction of GN containers. 45° degree internal side corner junction system. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation.</p>

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
159	1			<p>AMBIENT UNIT 1 HINGED DOOR WITH GUIDES FOR GN 1/1 BASINS - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>
160	1	Zanussi	392347	<p>ELECTRIC GRILL TOP HP 800MM 380-400 V - Heating via incoloy armoured heating elements positioned under the cooking grid. Cooking surface grids are easily removable for cleaning. Heating elements can be tilted. Integrated water tap. Fixed well with drain. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units. WRAS compliant. 380-400 V.</p>
160.1	1	Zanussi	391154	<p>OPEN BASE - To be installed below other 900XP top units in island type installations with operations from one side. Open base to store pots, pans, sheet pans etc. Body and internal structure of unit entirely in stainless steel. Delivered with 150 mm height adjustable feet.</p>
160.2	2	Zanussi	206350	<p>DOOR FOR OPEN BASE CUPBOARD</p>

08 _ CHEF ISLAND

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
165	1	Electrolux Professional	710017	<p>REFR.COUNTER 290L 4x1/2DRW NOTOP CU_LFT GALV - AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. N. 4X1/2 drawers. Built-in refrigeration unit. Operating temperature: -2+10°C. R290 gas in refrigeration circuit.</p>
165	1			<p>HOT CUPBOARD WITH SLIDING DOORS - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Fan-assisted heating via armoured elements assures temperature ranges from 30° to 90°C. Removable control panel with mechanical thermostat, green ON/OFF indicator light and orange indicator light for heating element operation.</p>
165	1	Alto Sham	500-S	<p>HALO HEAT LOW TEMP HOLDING CABINET - Maintain food quality. Keep product at its perfect serving temperature and hold for hours without overcooking or drying out. Easy to operate. Adjustable, electronic thermostat with digital display monitors the inside temperature to ensure food is being held at safe and precise temperatures. Easy to clean. Simply remove shelves and wipe clean.Capacity 3 Full-Size Hotel Pans (4") - 6 Full-Size Hotel Pans (2-1/2") - 3 GN 1/1 Pans (100mm) - 6 GN 1/1 Pans (65mm)</p>
165.1	1			<p>BUILT-IN HAND SINK INCLUDED IN ITEM 166</p>
166	1			<p>WORK TOP WITH UPSTAND + REFRIGERATED DISPLAY CASE MADE TO MEASURE - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.</p>

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
166	1			<p>AMBIENT UNIT 1 HINGED DOOR WITH BIN - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>
166	1			<p>AMBIENT UNIT 1 HINGED DOOR - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>
166	1			<p>CUPBOARD BASE FOR SINK TOP - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system.</p>
166	1			<p>DROP-IN BOWL RIGHT DRAINAGE</p>
166	1			<p>FAUCET WITH BLACK PLASTIC LEVER</p>

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
166	1	JCLASS IN 30 IB ACWG + 6180MP		JCLASS IN 30 IB ACWG + 3-WAY TAP ONLY PURIFIED + FILTER + BOWL AND TAP - Liters per hour 30 Lt/H Continuous liters 7 Lt Water temperature 3/10° Dim 255x400x400 mm
166.1	1			POLYETHYLENE CUTTING BOARD
166.2	1			REFRIGERATED DISPLAY CASE INCLUDED IN THE TOP, TAILOR-MADE EXECUTION

09 _ CHARCUTERIE

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
168	1	Electrolux Professional	710017	<p>REFR.COUNTER 290L 4x1/2DRW NOTOP CU_LFT GALV - AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. N. 4X1/2 drawers. Built-in refrigeration unit. Operating temperature: -2+10°C. R290 gas in refrigeration circuit.</p>
168.1	1			<p>WORK TOP WITH UPSTAND + REFRIGERATED DISPLAY CASE MADE TO MEASURE - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.</p>
168.1	1			<p>AMBIENT UNIT WITH 4 DRAWERS - Constructed entirely in 304 AISI stainless steel with front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Drawers in 304 AISI stainless steel with telescopic runners for easy extraction of GN containers. 45° degree internal side corner junction system. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation.</p>

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
168.1	1			<p>AMBIENT UNIT 1 HINGED DOOR + BIN - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>
168.1	1			<p>AMBIENT UNIT 1 HINGED DOOR - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>
168.1	1		JCLASS IN 30 IB ACWG + 6180MP	<p>JCLASS IN 30 IB ACWG + 3-WAY TAP ONLY PURIFIED + FILTER - Liters per hour 30 Lt/H Continuous liters 7 Lt Water temperature 3/10° Dim 255x400x400 mm</p>
168.2	1	Gemm	THBD/090S	<p>GN 1/1 FREEZER LOW TEMPERATURE - Temperature -15/-20°C, Structure: made in staineless steel, Cooling system: ventilated cooling system, Electronic digital control, Defrost: automatic defrozing system with heating elements, Evaporation of condensate water: automatic, Fittings on request: drawer units, Included: 2 GN 1/1 shelves each door</p>

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
168.3	1			REFRIGERATED DISPLAY CASE INCLUDED IN THE TOP, TAILOR-MADE EXECUTION
169	2			DOUBLE WALL SHELF WITH BRACKETS
170	1	Alto Sham	100-HW/D6	WATERLESS HOT FOOD WELL - Extend food holding times with efficient, precise Halo Heat®technology Maintain food quality without the use of extremely hot elements, added humidity or fans Increase sales with attractive food presentation and quality Provide optimal holding temperatures with an adjustable thermostat that can be flush-mounted into the counter or a location out of sight from customers Dim Exterior 225mm x 380mm x 586mm
171	1	Berkel	Volano B3	FLYWHEEL MANUAL SLICER B3 RED - Blade diameter 300 mm Blade material 100Cr6 Cut thickness 0 - 1,5 mm Cut Capacity Circle 210 mm Cut Capacity Rectangular 270x210 mm Details Matt details and finishes, screw mechanism for opening the blade guard. Removable parts slice guard deflector; Receiving Plate; Meat table Sharpener included, 2-movements type

10 _ PIZZA

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
172	1			WORK TABLE WITH UPSTAND WITH POLYETHYLENE CUTTING BOARD
175	1	Margot Food Machine	Genius Classic D6L + Zero Fumi 6L + Proofer	TWO-CHAMBER PIZZA OVEN WITHOUT CHIMNEY + PROOFER + REFRIGERATED CONDENSING HOOD WITHOUT FLUE - For Chamber: External dimensions 1440x1010x40 mm, Internal dimensions 1050x700x150, max absorption kw 9, Temperature 0-460°C, N. 6 pizzas diameter 350 mm, N. 2 pans 600x400 mm
176	1	Gemm	TG7D/090S	GN 1/1 REFRIGERATED COUNTER NORMAL TEMPERATURE - Temperature -2/+8°C, Structure: made in stainless steel, Cooling system: ventilated cooling system, Electronic: digital control, Defrost: automatic defrosting system with heating elements, Evaporation of condensate water: automatic, Included 1 GN 1/1 shelf each door
176.1	1			WORK TOP WITH UPSTAND + REFRIGERATED DISPLAY CASE MADE TO MEASURE - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.
176.1	1			AMBIENT UNIT 1 HINGED DOOR + GN 1/1 BASIN GUIDES - Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to
176.1	1		JCLASS IN 30 IB ACWG + 6180MP	JCLASS IN 30 IB ACWG + 3-WAY TAP ONLY PURIFIED + FILTER + BOWL AND TAP - Liters per hour 30 Lt/H Continuous liters 7 Lt Water temperature 3/10° Dim 255x400x400 mm
176.2	1			REFRIGERATED DISPLAY CASE INCLUDED IN THE TOP, TAILOR-MADE EXECUTION

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
------	------	-------	------	-------------

177 2

DOUBLE WALL SHELF WITH BRACKETS

LOW-TEMPERATURE HOT-FOOD HOLDING

CABINET - Simple and intuitive pushbutton control that commands all appliance functions with easily identifiable icons

178 1

Alto
Sham

1200-UP

Halo Heat—a controlled, uniform heat source that gently surrounds food for better appearance, taste, and longer holding life

Stainless steel interior resists corrosion

Digital control senses temperature drops faster, providing quick heat recovery time

Dim Exterior 1924mm x 671mm x 817mm

RAW BAR

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION
------	------	-------	--------	-------------

245/24 7/248/ 249/25 1/252	1			<p>BAR COUNTER + N. 1 REFRIGERATED DISPLAY CASE SELF-COOLING - WORK TOP 1,5MM, WOODEN REINFORCEMENT, R=10 EDGE, WITH NON-DRIP EDGE, WITH BACKSPLASH N. 2 S/S WORKTOP UNDERPANEL N. 2 SIDESPALSH FOR WORK TOP WITH ROUNDED EDGE N. 2 RADIUSSED REAR EDGES, BACKSPLASH FOR BARCOUNTER N. 2 OUTLET 230V, N. 2 PRESA ETHERNET DRAINER ON WORK TOP 1,5 MM THICK WELDED WELL 500X400X250H SINGLE HOLE ELBOW MIXING TAP, STANDARD FREEZER COUNTER, FULLY OUTFITTED FOR REMOTE COMPRESSOR ON RIGHT-HAND SIDE, FREON R452A, 1 DOOR GN1/1, DIM. 745X665X850 -18/-22°C W550, NICHE REFRIGERATED COUNTER WITHOUT WORKTOP, FULLY OUTFITTED FOR REMOTE COMPRESSOR ON LINKS-HAND SIDE, 2 DOORS GN1/1, DIM. 1210X665X760 N. 2 ADDITIONAL VALUE FOR CHEST OF DRAWERS 2X1/2 GN1/1 WITH S/S TELESCOPIC RUNNERS FOR VENTILATED REFRIGERATED UNITS 760H NICHE TIPPING WASTE BIN, STANDARD (TELESCOPIC RUNNERS WITHOUT BUMPER) PLINTHE PANELLING SUPPORT, REFRIGERATED DISPLAY CASE SELF-COOLING 1450X380X275MM **CLADDING NOT SUPPLIED</p>
	1	RIVACOLD		<p>REMOTE UNIT FOR FREEZER 670L CABINETS & 2+3 COMP. COUNTERS-R452 INCLUDED REFRIGERATED LINE, PLACED IN THE FALSE CEILING</p>
	1	RIVACOLD		<p>REMOTE UNIT-2+10°C 670L REF+HD COUNTERS-R134a INCLUDED REFRIGERATED LINE, PLACED IN THE FALSE CEILING</p>

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION
252	2			RAW BAR DISPLAY - REFRIGERATION FROM ABOVE Made of AISI 304 stainless steel with finishes as per drawing. Remote refrigeration with automatic defrost evaporator. Adjustable plexiglass internal shelves. Remote digital display for temperature reading. Universal locking key.
	2	RIVACOLD		REMOTE UNIT-2+10°C 670L REF+HD COUNTERS-R134a INCLUDED REFRIGERATED LINE - PLACED IN THE FALSE CEILING
246	1			TRAY TROLLEY - WORK TOP 1,5MM WOODEN REINFORCEMENT 90° EDGE, WITHOUT NON-DRIP EDGE, 400X700X50 GN 1/1 CABINET WITH SLIDES H=700, STANDARD KIT OF S/S-WHEELS WITH PIVOT, BASIC LINE
250	1	HOSHIZAKI	FM-80KE-HC	ICE MAKER SELF CONTAINED - Production Capacity (kg/24h) approx. (AT 10°C, WT 10°C) 85 Storage bin capacity (kg) approx. 26 Power Supply 1/220 - 240V/50Hz Electric Consumption (kW) 0.27 Heat Rejection (AT 32°C, WT 21°C) (kW) 0.45 Dimensions of Legs (mm) Including legs at 89 mm Ice type Flake

12 _ WINE STORAGE

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
205	1		ICBDEC2450 W	COLUMN WINE CELLAR - Capacity 102 bottles, Energy efficiency class G, Two separate temperature zones allow you to set the ideal temperatures (+4°C, +18°C) for both serving and storing wine, Interior light independent of door opening, Fully pull-out shelves for easy access to bottles
206	1		ICBDEC2450 W	COLUMN WINE CELLAR - Capacity 102 bottles, Energy efficiency class G, Two separate temperature zones allow you to set the ideal temperatures (+4°C, +18°C) for both serving and storing wine, Interior light independent of door opening, Fully pull-out shelves for easy access to bottles
207	1		ICBDEC2450 W	COLUMN WINE CELLAR - Capacity 102 bottles, Energy efficiency class G, Two separate temperature zones allow you to set the ideal temperatures (+4°C, +18°C) for both serving and storing wine, Interior light independent of door opening, Fully pull-out shelves for easy access to bottles
208	1			ICE CONTAINER INCORPORATED IN THE ICE MAKER
208.1	1			SCOOP HOLDER
209	1	Hoshizaki	KM-140C-HC	ICE MAKER The KM-140C-HC self-contained ice maker produces clear, curved shape ice cubes that are extremely versatile. The benefits of “crescent” shaped ice cubes extend from “splash-free” serving of post mix soft drinks, through to beverage bottles and cans display for impulse purchase. Also ideal for wine and champagne bottles chilling in ice buckets without the addition of water, long drinks & popular Caribbean cocktails preparation and even fish display counters. It’s ideal for fast selling establishments such as nightclubs, sporting and entertainment venues.
209.1	1			EVERPURE
210	1			FLOOR TROUGH

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
211	1			WINE BOTTLE RACK - NOT PROVIDED BY US
212	1			WINE BOTTLE RACK - NOT PROVIDED BY US
215	1			WINE BOTTLE RACK - NOT PROVIDED BY US
216	1			WINE BOTTLE RACK - NOT PROVIDED BY US
217	1			EVERPURE
218	1		121129/S	WORK TOP WITH UPSTAND - The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front and rear profiles, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.
219	1	Bunn	453.000.000	HOT WATER DISPENSER WITH TEMPERATURE CONTROL - H capacity: 79 L Power 2500W-3500W Heating Element
220	2	Bunn	39900.0017 + 36725.0000 + 51746.0001	PROFESSIONAL FILTER COFFEE EXTRACTION MACHINE WITH EXCLUSIVE METHOD TO INCREASE TURBULENCE IN THE FUNNEL 149 cups/h. 1800W-2000W + 3,8 L AIRPOT + THERMOS 1,9 L
221	1	Electrolux Professional	710003	REFR.COUNTER 290L 2xDOOR REM CU_LFT GALV - AISI 304 - stainless steel panels, AISI 430 bottom panel, galvanized back panel. Worktop thickness 50mm. N. 2 full doors. Operating temperature: -2+10°C. R134a gas in refrigeration circuit. Supplied with 1 grid for each door compartment
221	1	RIVACOLD		REMOTE UNIT-2+10°C 670L REF+HD COUNTERS-R134a INCLUDED REFRIGERATED LINE

CHAMPAGNE BAR

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION
230/23 1/232/ 235/23 6/238/ 239	1			BAR COUNTER - WORK TOP 2MM, S/S REINFORCEMENT, R=10 EDGE AND NON-DRIP EDGE N. 2 SIDESPALSH FOR WORK TOP WITH ROUNDED EDGE BACKSPLASH FOR BARCOUNTER N. 2 OUTLET 230V, N. 2 PRESA ETHERNET N. 2 DRAINER ON WORK TOP 2 MM THICK, N. 2 WELDED WELL 300X240X170H N. 2 SINGLE HOLE ELBOW MIXING TAP, STANDARD, WASTE CHUTE DRIP PAN 200X200, WATER SPRAY FOR GLASSES COCKTAIL STATION SINGLE, 860X430 WITH 7 BASINS E 3 DIVIDORS GARNISH RAIL (NOT WELDED) INTEGRATED SPEED RAIL L=900 N. 2 WASTE BIN UNDERCOUNTER WITH SWING DOOR AND TIPPING OPENING, STANDARD, 400X665X760H, NICHE OPEN CABINET WITH INTERMEDIATE SHELF, STANDARD, 400X600X760 REFRIGERATED COUNTER, FULLY OUTFITTED FOR REMOTE COMPRESSOR ON RIGHT-HAND SIDE, FREON R452A, 2 DOORS GN1/1, 1210X565X620 -2/+8°C W360 EVAPORATOR INSIDE OF COOL COMPARTMENT N. 2 EXTRA CHARGE FOR DRAWER GN1/1 WITH S/S TELESCOPIC RUNNERS FOR VENTILATED REFRIGERATED UNITS 470H TIPPING WASTE BIN, STANDARD (TELESCOPIC RUNNERS WITHOUT BUMPER) S/S SOCLE 600MM DEEP PANELLING SUPPORT H 1100MM **CLADDING NOT SUPPLIED
	1	RIVACOL D		REMOTE UNIT-2+10°C 670L REF+HD COUNTERS- R134a INCLUDED REFRIGERATED LINE, PLACED IN THE FALSE CEILING
237	1	HOBART	PROFI GX-10C	GLASSWASHERS - Self-cleaning washing system Control of dishwasher operation also through smart devices USB interface Cold rinsing Filter position control Bowl capacity 10.6 l Pool heating 1.7 kw Baskets 500x500 mm

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION
239.1	2			CHAMPAGNE DISPLAY - Made of AISI 304 stainless steel with finishes as per drawing. Remote refrigeration with automatic defrost evaporator positioned on the roof. Adjustable plexiglass internal shelves. Remote digital display for temperature reading. Universal locking key. Construction as per drawing
239.2	2	RIVACOLD		REMOTE UNIT-2+10°C 670L REF+HD COUNTERS-R134a INCLUDED REFRIGERATED LINE, PLACED IN THE FALSE CEILING

RAW BAR

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION
------	------	-------	--------	-------------

245/24 7/248/ 249/25 1/252	1			<p>BAR COUNTER + N. 1 REFRIGERATED DISPLAY CASE SELF-COOLING - WORK TOP 1,5MM, WOODEN REINFORCEMENT, R=10 EDGE, WITH NON-DRIP EDGE, WITH BACKSPLASH N. 2 S/S WORKTOP UNDERPANEL N. 2 SIDESPALSH FOR WORK TOP WITH ROUNDED EDGE N. 2 RADIUSSED REAR EDGES, BACKSPLASH FOR BARCOUNTER N. 2 OUTLET 230V, N. 2 PRESA ETHERNET DRAINER ON WORK TOP 1,5 MM THICK WELDED WELL 500X400X250H SINGLE HOLE ELBOW MIXING TAP, STANDARD FREEZER COUNTER, FULLY OUTFITTED FOR REMOTE COMPRESSOR ON RIGHT-HAND SIDE, FREON R452A, 1 DOOR GN1/1, DIM. 745X665X850 -18/-22°C W550, NICHE REFRIGERATED COUNTER WITHOUT WORKTOP, FULLY OUTFITTED FOR REMOTE COMPRESSOR ON LINKS-HAND SIDE, 2 DOORS GN1/1, DIM. 1210X665X760 N. 2 ADDITIONAL VALUE FOR CHEST OF DRAWERS 2X1/2 GN1/1 WITH S/S TELESCOPIC RUNNERS FOR VENTILATED REFRIGERATED UNITS 760H NICHE TIPPING WASTE BIN, STANDARD (TELESCOPIC RUNNERS WITHOUT BUMPER) PLINTHE PANELLING SUPPORT, REFRIGERATED DISPLAY CASE SELF-COOLING 1450X380X275MM **CLADDING NOT SUPPLIED</p>
	1	RIVACOLD		<p>REMOTE UNIT FOR FREEZER 670L CABINETS & 2+3 COMP. COUNTERS-R452 INCLUDED REFRIGERATED LINE, PLACED IN THE FALSE CEILING</p>
	1	RIVACOLD		<p>REMOTE UNIT-2+10°C 670L REF+HD COUNTERS-R134a INCLUDED REFRIGERATED LINE, PLACED IN THE FALSE CEILING</p>

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION
252	2			RAW BAR DISPLAY - REFRIGERATION FROM ABOVE Made of AISI 304 stainless steel with finishes as per drawing. Remote refrigeration with automatic defrost evaporator. Adjustable plexiglass internal shelves. Remote digital display for temperature reading. Universal locking key.
	2	RIVACOLD		REMOTE UNIT-2+10°C 670L REF+HD COUNTERS-R134a INCLUDED REFRIGERATED LINE - PLACED IN THE FALSE CEILING
246	1			TRAY TROLLEY - WORK TOP 1,5MM WOODEN REINFORCEMENT 90° EDGE, WITHOUT NON-DRIP EDGE, 400X700X50 GN 1/1 CABINET WITH SLIDES H=700, STANDARD KIT OF S/S-WHEELS WITH PIVOT, BASIC LINE
250	1	HOSHIZAKI	FM-80KE-HC	ICE MAKER SELF CONTAINED - Production Capacity (kg/24h) approx. (AT 10°C, WT 10°C) 85 Storage bin capacity (kg) approx. 26 Power Supply 1/220 - 240V/50Hz Electric Consumption (kW) 0.27 Heat Rejection (AT 32°C, WT 21°C) (kW) 0.45 Dimensions of Legs (mm) Including legs at 89 mm Ice type Flake

4.2 Piano B01 Ristorante

01 _ COLD ROOMS

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION
1A/1B/ 1C	1	Incold	MULTISYS M 80 + CE MULTI	<p>COLD STORAGE BLOCK AS PER DRAWING (WITHOUT FLOOR) - DAILY - MEAT - PRODUCE -</p> <p>Multisystem is a range of fully modular and extendable cold rooms. Its modularity and the complete range of accessories permit the assembling with camlocks of simple and complicated project, can be extended/partitioned for future needs and permits the use of just a few different types of panels for a large number of cold-rooms dimensions facilitating those distributors who work with stock of panels - DOOR ON HINGE - The door panel is fitted around the uoter edge with camlock fastener, like any wall panel, using the camlock. The leaf is lined with a profile in anonized aluminum and a special gasket is fitted around the edge to ensure a thermal seals, L=800, H=2000</p>
1.1	3	KLF		EVAPORATOR INCLUDED IN COLD STORAGE
1.2	3	Riva Cold		CONDENSIT UNIT PLACED IN THE FALSE CEILING
2	5	Cambro	CBU243672V 4580	STORAGE SHELVING, 4 GRILLED SHELVES
2.1	2	Cambro	CBU246072V 4580	STORAGE SHELVING, 4 GRILLED SHELVES
2.2	1	Cambro	CBU247272V 4580	STORAGE SHELVING, 4 GRILLED SHELVES
5	2	Hupfer	112775	GASTRONORM TROLLEY FOR 18 × GN

02 _ DRY STORAGE

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION
6	2	Cambro	CBU214872V 4580	STORAGE SHELVING, 4 GRILLED SHELVES
6.1	1	Cambro	CBU214272V 4580	STORAGE SHELVING, 4 GRILLED SHELVES

03 _ DOUGH PREPARATION

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION
8	1	Hobart	A200-F1HE	<p>FLOOR PLANETARY MIXER CAPACITY 20 LITERS Three speeds, plus stirring function: 107, 198, 361 rpm - Stainless steel tank with a capacity of 20 L - 1 type "B" aluminum leaf mixer - 1 "ED" type stainless steel hook mixer - 1 type "D" stainless steel whisk - 230V/50Hz/1f</p>
9	1			<p>WORK TOP WITH UPSTAND The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front profile, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.</p>
9	1			<p>AMBIENT UNIT 2 HINGED DOORS Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Doors incorporate sound deadening internal panels and are fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>
10	1			<p>SOLID WALL SHELF WITH BRACKETS</p>
11	1	Electrolux Professional	710000	<p>REFR.COUNTER 290L 2xDOOR NOTOP CU_LFT GALV AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. N. 2 full doors. Built-in refrigeration unit. Operating temperature: -2+10°C. R290 gas in refrigeration circuit. Supplied with 1 grid for each door compartment</p>

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION
------	------	-------	--------	-------------

COUNTERTOP PLANETARY CAPACITY 20 LITERS

12	1	Hobart	A200-B1HE	Three speeds, plus stirring function: 107, 198, 361 rpm - Stainless steel tank with a capacity of 20 L - 1 type "B" aluminum leaf mixer - 1 "ED" type stainless steel hook mixer - 1 type "D" stainless steel whisk - 230V/50Hz/1f
----	---	--------	-----------	--

04 _ POT WASH

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION
15	1			<p>FREE-STANDING HAND WASH BASIN WITH WASTE CABINET, KNEE-OPERATED, 1 BOWL, MIXER SPOUT AND DRAIN HOLE Made from 304 AISI stainless steel. Integral radiused rear upstand, knee-operated. Waste cabinet with hinged door and handle incorporates a support frame for waste bags. Bowl mm340x365x155h with mixer spout and drain hole.</p>
16	1			<p>WORK TOP WITH UPSTAND The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front profile, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.</p>
16	1			<p>DROP-IN 2 BOWLS</p>
16	1			<p>CUPBOARD BASE FOR SINK TOP Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Easily removable sliding doors with sound deadening internal and external panels have stainless steel bearings on the top and a hidden runner on the bottom. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system.</p>
16	1			<p>SHOWER UNIT + WALL-MOUNTED MIXER</p>
16.1	1			<p>PREP SINK (INCLUDED IN ITEM 16)</p>
17.1	2			<p>SOLID WALL SHELF WITH BRACKETS</p>
17.2	2			<p>SOLID WALL SHELF WITH BRACKETS</p>

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION
------	------	-------	--------	-------------

				GLASSWASHERS Self-cleaning washing system Control of dishwasher operation also through smart devices USB interface
18	1	Hobart	PROFI GX-10C	Cold rinsing Filter position control Bowl capacity 10.6 l Pool heating 1.7 kw Baskets 500x500 mm

05 _ DOUGH PREPARATION & PASTA

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION
19	1	Cambro	CBU244872V 4580	STORAGE SHELVING, 4 GRILLED SHELVES
20	1	La Monferri na	P3	PASTA MACHINE is a medium-production machine, recommended for restaurants, agritourisms, pizzerias, delicatessens, and businesses involved in the sale and tasting of fresh pasta. Its operation is simple and efficient. It features an anodized aluminum exterior and stainless steel parts in contact with the pasta. It is equipped with a control panel and complies with current safety regulations. Pasta production 8-10 Kg/h - Motor power 900 W
21	1			SOLID WALL SHELF WITH BRACKETS
22	1			WORK TOP WITH UPSTAND The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front profile, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.
22	1			AMBIENT UNIT 2 HINGED DOORS Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Doors incorporate sound deadening internal panels and are fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION
22	1			<p>AMBIENT UNIT WITH HOPPER Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure.</p>
22	1			<p>AMBIENT UNIT WITH 2 DRAWERS Constructed entirely in 304 AISI stainless steel with front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Drawers in 304 AISI stainless steel with telescopic runners for easy extraction of GN containers. 45° degree internal side corner junction system. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation.</p>
22	1			<p>AMBIENT UNIT 1 HINGED DOOR WITH GN BOWL HOLDER GUIDES 1/1 Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Door incorporates a sound deadening internal panel and is fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system. 304 AISI middle shelf, with inner double fold to eliminate gaps between sides and back, height-adjustable in 3 positions with a stainless steel support to avoid twisting.</p>
22	1			<p>AMBIENT UNIT WITH HOPPER Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure.</p>

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION
22	1			<p>AMBIENT UNIT WITH 2 DRAWERS Constructed entirely in 304 AISI stainless steel with front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Drawers in 304 AISI stainless steel with telescopic runners for easy extraction of GN containers. 45° degree internal side corner junction system. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation.</p>
23	1	Electrolux Professional	603532	<p>DOUGH SHEETER-TABLE ST.-500MM-400/3 Motorized dough sheeter for table top use or can be mounted onto a mobile stand (optional). Working width 500mm. Rolling direction can be inverted by the movement of a joystick. Cylinders can be regulated from 0,1 to 27mm in thickness. Chromium plated steel rollers (60mm diam.). Smooth surfaces are painted white. The upper and lower roller scrapers are easily removable for cleaning. Slides can be disassembled and have a non-stick coating to facilitate the sliding of the dough. Safety grating is hinged on the structure and equipped with a safety micro-switch to avoid injury. If the gratings are raised over a dangerous level the motor will stop. Flour container fixed on the top of the machine. Emergency stop button with lock and manual re-start ensures the cylinders stop immediately guaranteeing operator safety. Remote foot pedal to change rolling direction, available as an accessory. Electrical power 0.37 Kw - Voltage 230/400 V - Frequency 50/60 Hz - Phases 3</p>
25	3	Rubbermaid	FG360088WHT	INGREDIENT CONTAINER WITH SCOOP 79 LT
26	1			SOLID WALL SHELF WITH BRACKETS

06 _ PREPARATION & COLD STORAGE

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
27	1			<p>WORK TOP WITH UPSTAND The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front profile, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 950mm.</p>
27	1			<p>AMBIENT UNIT WITH 4 DRAWERS Constructed entirely in 304 AISI stainless steel with front and rear longitudinal stainless steel c-channel reinforcement. Internal and external side panels with sound deadening reinforcements to strengthen structure. Drawers in 304 AISI stainless steel with telescopic runners for easy extraction of GN containers. 45° degree internal side corner junction system. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation</p>
27	1			<p>CUPBOARD BASE FOR SINK TOP Constructed entirely in 304 AISI stainless steel. Front and rear longitudinal stainless steel c-channel reinforcement. Doors incorporate sound deadening internal panels and are fitted with 304 AISI stainless steel hinges allowing an opening of 180° degrees. 150mm height-adjustable (0/+90mm) oversized feet (65x65mm) can be removed for masonry installation. 45° degree internal side corner junction system.</p>
27	1			<p>FAUCET WITH BLACK PLASTIC LEVER</p>
27.1	1			<p>DROP-IN BOWL RIGHT DRAINAGE</p>
28	2			<p>SOLID WALL SHELF WITH BRACKETS</p>

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
29	1	Gemm	TG7D/090S	<p>GN 1/1 REFRIGERATED COUNTER Temperature - 2/+8°C - Doors 1 - Cooling unit plug-in unit - Capacity GN 1/1 racks - Structure made in stainless steel - Technical compartment position: technical compartment on right side - Cooling system: ventilated cooling system - Electronic digital control - Defrost automatic with heating elements - Evaporation of condensate water automatic Fittings on request - drawer units: Included 1 GN 1/1 shelf each door - Gas R290 - Supply voltage Volt.: 1x230V ~ 50Hz</p>
30	1			<p>FREE-STANDING HAND WASH BASIN WITH WASTE CABINET, KNEE-OPERATED, 1 BOWL, MIXER SPOUT AND DRAIN HOLE Made from 304 AISI stainless steel. Integral radiused rear upstand, knee-operated. Waste cabinet with hinged door and handle incorporates a support frame for waste bags. Bowl mm340x365x155h with mixer spout and drain hole.</p>
31.1	1	Electrolux Professional	725391	<p>1-DOOR REFRIGERATOR 670L -2/+10°C, DIGITAL WITH LIGHT, A304 - R290 Full door refrigerator with internal and external structure in 304 AISI stainless steel; external back panel in galvanized steel and bottom panel in anti-corrosive material. Digital control with cabinet temperature display and setting and manual activation of defrost cycle. Fully compliant HACCP digital controls include visible alarms. Optimized back to front forced air flow provides even temperature distribution and fast cooling in any conditions. Fitted with 75 mm-thick cyclopentane insulating foam. On-site reversible door features lock and door microswitch to switch off the fan when the door is opened. Hidden evaporator to guarantee higher storage capacity and less corrosion problems. Built-in refrigeration unit; ventilated operation; automatic defrost and evaporation of defrost water. Operating temperature: -2/+10 °C. CFC and HCFC free. R290 gas in refrigeration circuit. Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems. Electrical power 0.2 Kw - Voltage 220-240 V - Frequency 50 Hz - Phases1</p>

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
31.2	1	Electrolux Professional	725393	<p>2-DOOR REFRIGERATOR 1430L -2/+10°C, DIGITAL WITH LIGHT, A304-R290 Two full doors refrigerator with internal and external structure in 304 AISI stainless steel; external back panel in galvanized steel and bottom panel in anti-corrosive material. Digital control with cabinet temperature display and setting and manual activation of defrost cycle. Fully compliant HACCP digital controls include visible alarms. Optimized back to front forced air flow provides even temperature distribution and fast cooling in any conditions. Fitted with 75 mm-thick cyclopentane insulating foam. Door features lock and door microswitch to switch off the fan when the door is opened. Hidden evaporator to guarantee higher storage capacity and less corrosion problems. Remote refrigeration unit; ventilated operation; automatic defrost and evaporation of defrost water. Operating temperature: -2/+10 °C. CFC and HCFC free. R290 gas in refrigeration circuit. Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems. Electrical power 0.3 Kw - Voltage 220-240 V - Frequency 50 Hz - Phases 1</p>

ITEM	Q.TY	BRAND	CODE	DESCRIPTION
32	1	Electrolux Professional	725394	<p>2-DOOR FREEZER 1430L -22-15°C, DIGITAL WITH LIGHT, A304-R290 Two full doors freezer with internal and external structure in 304 AISI stainless steel; external back panel in galvanized steel and bottom panel in anti-corrosive material. Digital control with cabinet temperature display and setting and manual activation of defrost cycle. Fully compliant HACCP digital controls include visible alarms. Optimized back to front forced air flow provides even temperature distribution and fast cooling in any conditions. Fitted with 75 mm-thick cyclopentane insulating foam. Door features lock and door microswitch to switch off the fan when the door is opened. Hidden evaporator to guarantee higher storage capacity and less corrosion problems. Built-in refrigeration unit; ventilated operation; automatic defrost and evaporation of defrost water. Operating temperature: -22/-15 °C. CFC and HCFC free. R290 gas in refrigeration circuit. Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems. Electrical power 0.7 Kw - Voltage 220-240 V - Frequency 50 Hz - Phases 1</p>

07 _ BULK PREPARATION

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION
35	2	Cambro	CBU244272V 4580	STORAGE SHELVING, 4 GRILLED SHELVES
35.1	3	Cambro	CBU186072V 4580	STORAGE SHELVING, 4 GRILLED SHELVES
36	1	KLF		EVAPORATOR
37	1	Riva Cold		CONDENSIT UNIT PLACED IN THE FALSE CEILING

08 _ WASTE COMPACTOR

ITEM	Q.TY	BRAND	CODICE	DESCRIPTION
------	------	-------	--------	-------------

1 004386 20/30 **BOX COMPACTOR**

1 015935E01 **MAGNUM GLASS BOTTLE GRINDER**

