

NRE Series

RECYCLING SCREEN

A Completely New Concept: Fully Modular Construction

Nakayama, with extensive experience in the NSR screen series, has developed this innovative modular screening machine based on an entirely new concept.



Modular Design

All components can be individually replaced.



Easy Maintenance

Quick screen replacement and inspection access.



Lightweight Construction

Simplifies transportation and installation.



Energy Efficient

Reduced power consumption for sustainable operation.



NRE Series

RECYCLING SCREEN

Built on the idea that every component is replaceable, the machine features an all-bolted and cotter-pin assembly structure. By following the assembly manual, virtually anyone can assemble the machine with ease. Even the frame side plates are replaceable as individual parts.


Specifications and Processing Capacity

MODEL	SCREEN SIZE W × L (mm)	SCREEN SLOPE ANGLE	MAX. FEED SIZE (mm)	MOTOR POWER (kW)	REQUIRED OIL FLOW (lit / min)	CAPACITY (TPH)	APPROX. WEIGHT (TON)	Overall dimensions					
								A	B	C	D	E	F
NRE 352B	900 × 1500	12°	80	1.5	-	5 ~ 80	0.45	705	1460	1580	960	1150	1580
NREH352B	900 × 1500	12°	80	-	18.5	5 ~ 80	0.45	705	1460	1580	960	1150	1500
NRE 382A	900 × 2400	15°	80	2.2	-	5 ~ 120	0.65	780	2310	2430	1240	1240	1670
NREH382A	900 × 2400	15°	80	-	18.5	5 ~ 120	0.65	780	2310	2430	1240	1240	1540
NRE 4101	1200 × 3000	15°	80	5.5	-	5 ~ 180	0.85	380	2880	3320	1080	1600	2060
NRE 4102	1200 × 3000	15°	80	5.5	-	5 ~ 180	1.1	890	2880	3020	1340	1600	2060
NRE 4122	1200 × 3600	15°	80	5.5	-	5 ~ 200	1.3	890	3460	3950	1510	1600	2100

■ Processing capacity depends on the quality of raw materials, grain size and input mass.

■ This machine specifications and dimensions are subject to change without prior notice.


Overall Dimensions

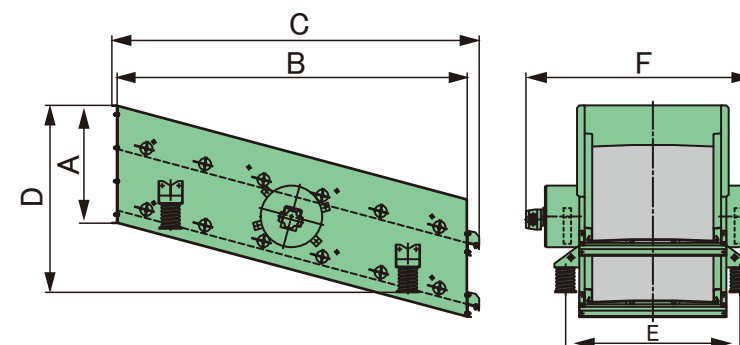

Models and Applications

HV35E (Electric Type) / HVVH35E (Hydraulic Type)


- Suitable for road base material production
- Ideal for transportation and relocation
- Equipped with two conveyors (optional)

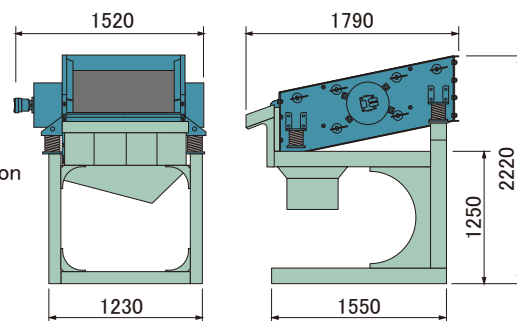

HVVH35E (Hydraulic Type)

HV35F (Electric Type) / HVVH35F (Hydraulic Type)

- Suitable for single-size aggregate classification
- Can be switched for road base material production
- Equipped with three conveyors (optional)

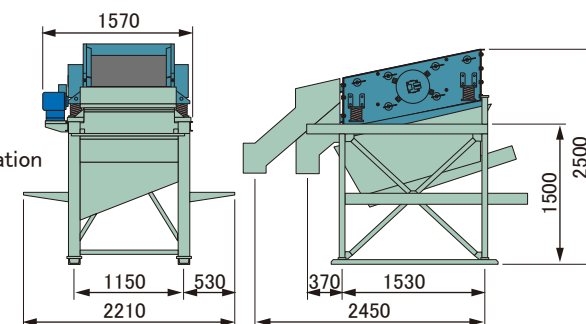

HV35F (Electric Type)

⚠ Safety Precautions: In order to use this product correctly and safely, please read the technical Manual carefully before use.

(Note) Do not use reprint of drawings and information in this catalogue without prior consent of Nakayama.



HEAD OFFICE: 2246-1 Amagu, Asahi-machi, Takeo City, Saga Pref. 843-0001 JAPAN
TEL: (81) 954-22-4171 FAX: (81) 954-23-0691
E-MAIL: overseas@nakayamairon.co.jp

www.ncjpn.com

TOKYO OFFICE TEL: (81) 3-6662-4135
OSAKA OFFICE TEL: (81) 72-672-4551
SINGAPORE OFFICE TEL: (65) 6222-3538