

AS Series

900 / 1200 / 1500

Features

- Continuous emission of wastes by mesh belt
 - Powerful suction that sucks vinyl, paper trashes and wood chips
 - Can adjust suction power and height of suction air separator
- Installable at compact and narrow space


Applications

- Improving quality of asphalt and concrete recycled products
- Collection of light-weight wastes from mixed industrial wastes.





Overall dimensions

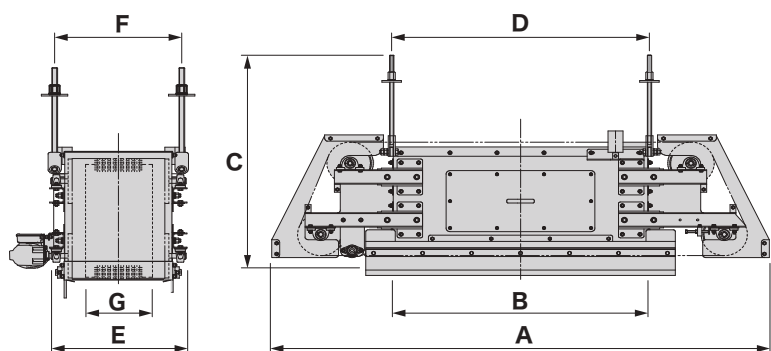

	A	B	C	D	E	F	G
AS900	2200	1000	1225	1020	640	480	250
AS1200	2540	1300	1230	1320	665	480	250
AS1500	2870	1700	980	1780	680	500	250

⚠ Safety Precautions: In order to use this product correctly and safely, please read the technical Manual carefully before use.

(Note) Do not use reprint of drawings and information in this catalogue without prior consent of Nakayama.




HEAD OFFICE: 2246-1 Amagu, Asahi-machi, Takeo City, Saga Pref. 843-0001 JAPAN
TEL: (81) 954-22-4171 FAX: (81) 954-23-0691
E-MAIL: overseas@nakayamairon.co.jp


www.ncjpn.com

- Sucks and discharges the light-weight rubbish by powerful suction and separation.
- Sucking power is adjustable and is able to produce high quality products.
- Installation works needs confirmaion of the existed installed machine and meeting to discuss.

Suction Air Separator (AS1200):
Suction Sorting & Collection

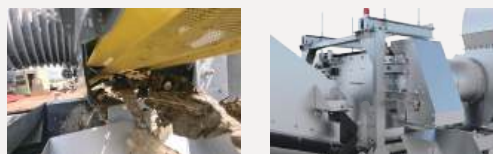

Axial Flow Cyclone
(TC15)

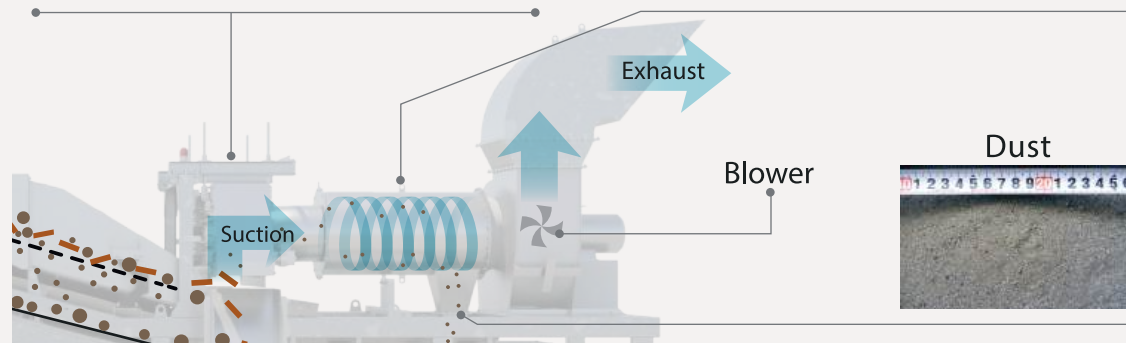

Specifications

MODEL	SUCTION SURFACE W×L (mm)	BELT SPEED (m/min)	MOTOR POWER (kW)	AIRFLOW (m ³ /min)	FAN POWER (kW)	WEIGHT (TON)
AS 900	250×1000	74(50Hz) / 89(60Hz)	0.4	210	11	0.21
AS1200	250×1300	90(50Hz) / 108(60Hz)	0.4	275	15	0.23
AS1500	250×1700	74(50Hz) / 89(60Hz)	0.4	360	18.5	0.24

■ Selecting fans is necessary when attach extended equipment to fans and also attachdust to fans.

■ Specifications and dimensions are subject to change without prior notice.



Homepage.