SHAFTS AND ROLLERS

For machining and purchasing - diameters and lengths remain provisional where marked

MEASURING ROLLER

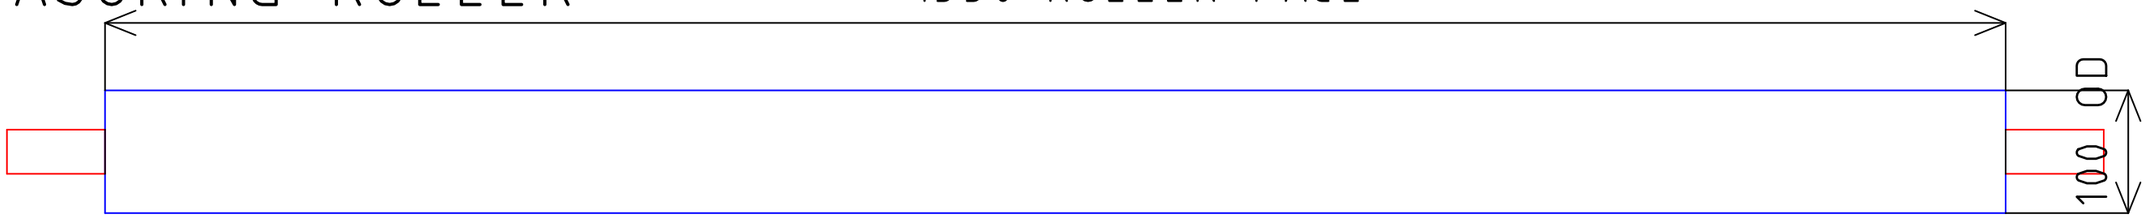

Rubber-lagged aluminium roller | Runout <= 0.20 mm TIR

SUPPLY / TAKE-UP SHAFT

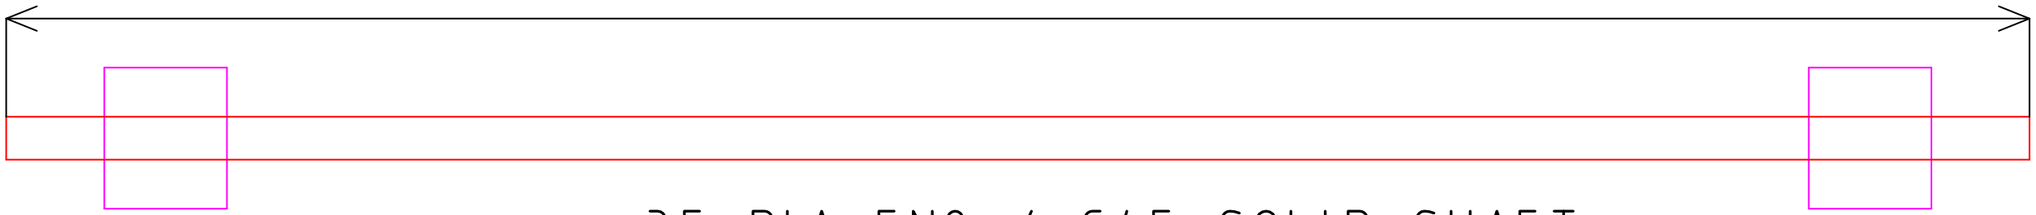

35 DIA EN8 / C45 SOLID SHAFT

CORE CONE DETAIL

BUY: 6 x UCP207 PILLOW BLOCKS
BEARING BORE: 35 mm
NIP: 80 OD x 1550; SPRING LOADED
ENCODER: 1024 PPR OR HIGHER

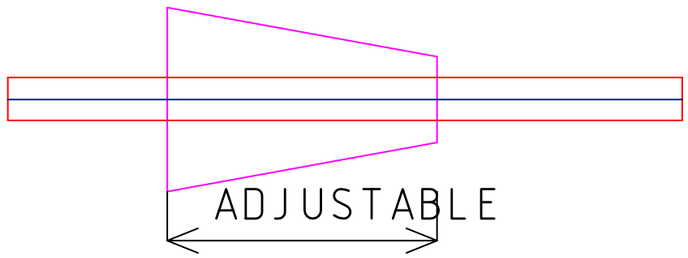

76 mm NOMINAL CORE - VERIFY RANGE

VERIFY MAXIMUM ROLL WIDTH BEFORE MACHINING SHAFTS.

	FABRIC METER S3 / 4	REV C A3 1:5	PROVISIONAL VERIFY FIRST