

# DURO<sup>TM</sup>

PROMISE OF A LIFETIME



Innovating Since 1957



Duroply Industries Limited





# **A MANIFESTO.** **FOR THE GIFT OF OUR FORESTS.**

We always start from zero. No matter what.

We are observers of trees and forests.  
We are detailed. We are meticulous. We are thorough.  
We examine every log of wood.  
Every piece of plank. Every slice of timber.

Because we know what it takes to deliver the promise of durobility.

Each unit of our plywood undergoes hundreds of checks. Dozens of experienced hands.  
And numerous methodologies and innovations to last longer than anyone can bet.

By the time it reaches your doorstep, we sow new saplings in our forests.

By the time it transforms into furniture that shall last you for generations, the forest welcomes its new generation too.

Then? We do it all over again.

That's the reason why – even after 68+ years of our existence - we still start from zero.

Always. And no matter what.

**WE ARE DURO®**



**DURO**

BRINGING  
THE DIFFERENCE  
SINCE 1957



**FOR GENERATION FROM GENERATION**

“

Our mission is to bring the future to  
your doorstep and serve you in the  
best way possible

**Akhilesh Chitlangia,**  
M.D. & CEO

”





## From the **Chairman's Desk**


Dear Customer,

We are proud to present you with a closer look into the world of DURO. And I sincerely hope that we are able to walk you through our history, our stellar collection, and answer all your questions at once.

Since we started in 1957, we have left no stone unturned in order to extend our legacy and serve our customers in a way that no one else has been able to do. For that, we focus on transparency and lead our communication to put you before everything else.

Now you're about to turn the page into everything that you might want to know about us. So take your due time and then make a decision that you won't ever regret.

Please let us know how we can assist you even more.

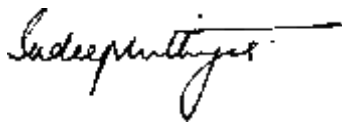

**Sudeep Chitlangia**  
**Chairman**



Are you a homeowner looking for plywood solutions that will last for years to come?

Are you unsure about which brand to consider?

Are you in search of a wide collection of veneers?

Are you worried about overspending and ending upon low-quality wood?

Are you looking for a unique range of design options with flawless finishing?

You're at the right place.

At **DURO** our customers come first and so does **our promise of durability**.

## WHAT DOES DUROBILITY MEAN TO US?

Since 1957, we have delivered on the following values:



Continuous  
Innovation



Quality  
Assurance



Value For  
Money



Lifetime Guarantee Against  
Termite Infestation



Unmatched  
Customer Experience



## WHAT PRODUCTS DO WE OFFER?



### Block Board

India's #1 Block Board best known for its superior quality & durability.



### Plywood

The best plywood manufacturer with unmatched qualities.



### Veneers

India's largest range of natural premium veneers with premium aesthetics.



### Doors

Duro Doors made with the finest quality timber for your safety and security.

## ABOUT **DURO**.

Established in 1957, **DURO** is India's leading plywood manufacturer and supplier. With our 68+ years of experience, we deliver excellence in quality and innovation. Our pride is our legacy, and we continue to extend it by building the plywood of the future.

## OUR **VISION**

To be the most admired wood-based company through innovation and excellence in customer service.

## OUR **MISSION**

- Continuously invest in technology that will provide preferred lifestyle through superior products.
- Offer the widest choice to customers with our commitment to innovation and our understanding of consumer needs.
- Maintain the highest level of professionalism, integrity, and honesty in dealing with our stakeholders.
- Provide exceptional services, offer responsible industry leadership, create profitable growth in harmony with environmental sustainability and good corporate citizenship with dedicated professionals.



A close-up photograph of two hands, palms facing each other, with fingers curled to form a heart shape. The hands are positioned in the center of the frame. The background is a dark, heavily textured surface, possibly a rock or a piece of weathered metal, with light-colored mineral deposits or lichen scattered across it. The lighting is soft, highlighting the skin texture of the hands.

# **Why trust DURO<sup>®</sup>?**

**We have what it takes to serve you  
in the best way possible.**

INNOVATING **SINCE 1957**

**We have a 68+ year–old legacy of serving the nation and earning the trust of its people.**



**1957**

Inception under the name 'Sarda Plywood'



**1964**

Beginning of commercial plywood production



**1969**

The company introduced its product range, 'Durobord' and 'DuroDoor'



**2016**

First company to introduce lifetime guarantee against insect infestation on premium products



**2013**

Became the 'first company' to manufacture and market plywood made from European Beech



**2012**

The company strengthened its claim of being a forest-friendly company by achieving the FSC® certificate



**2017**

First-of-its-kind Duro exclusive experience centre launched in New Delhi



**2018**

Re-named as 'Duroply Industries Limited'



**2021**

Launch of India's first 10' range of plywood along with DURO TV to raise customer awareness

Our story began with a man on a mission. The one who turned a larger-than-life dream into a reality – a plywood manufacturing giant.



**1974**

The Company was recognized as a public limited company



**1976**

First ISI certifications



**1986**

Registered as a public limited company on the BSE and CSE



**1999**

The company began operations in Rajkot, Gujarat



**1994**

The Company entered the veneer market with Duro Nature's Signature brand



**1987**

Launch of Duro Pumaply (all weather-proof plywood)



**2023**

Launch of Duro beyond blueprints podcast, as initiative to uncover the hidden gems of architecture and design



**2024**

Introduces DURO ADVANTAGE- "Plywood Ka Naya Standard"





# Empowering Growth for over 6 Decades with DUROble Innovations

**3rd**

Generation  
Company

**68+**

Years of  
Innovation

**4000+**

Duro Retailers

**450+**

Design Options

**180+**

Strong Duro  
Experts across India

**12,000+**

Contractors &  
Carpenter's Network

**26+**

States and UT

**4,000+**

Architects and  
Interior Designers


**800+**

Direct Distributors

## #MeraBharatMeraDURO®

We are always there for you.

It's why our network spans the length and breadth of the country.

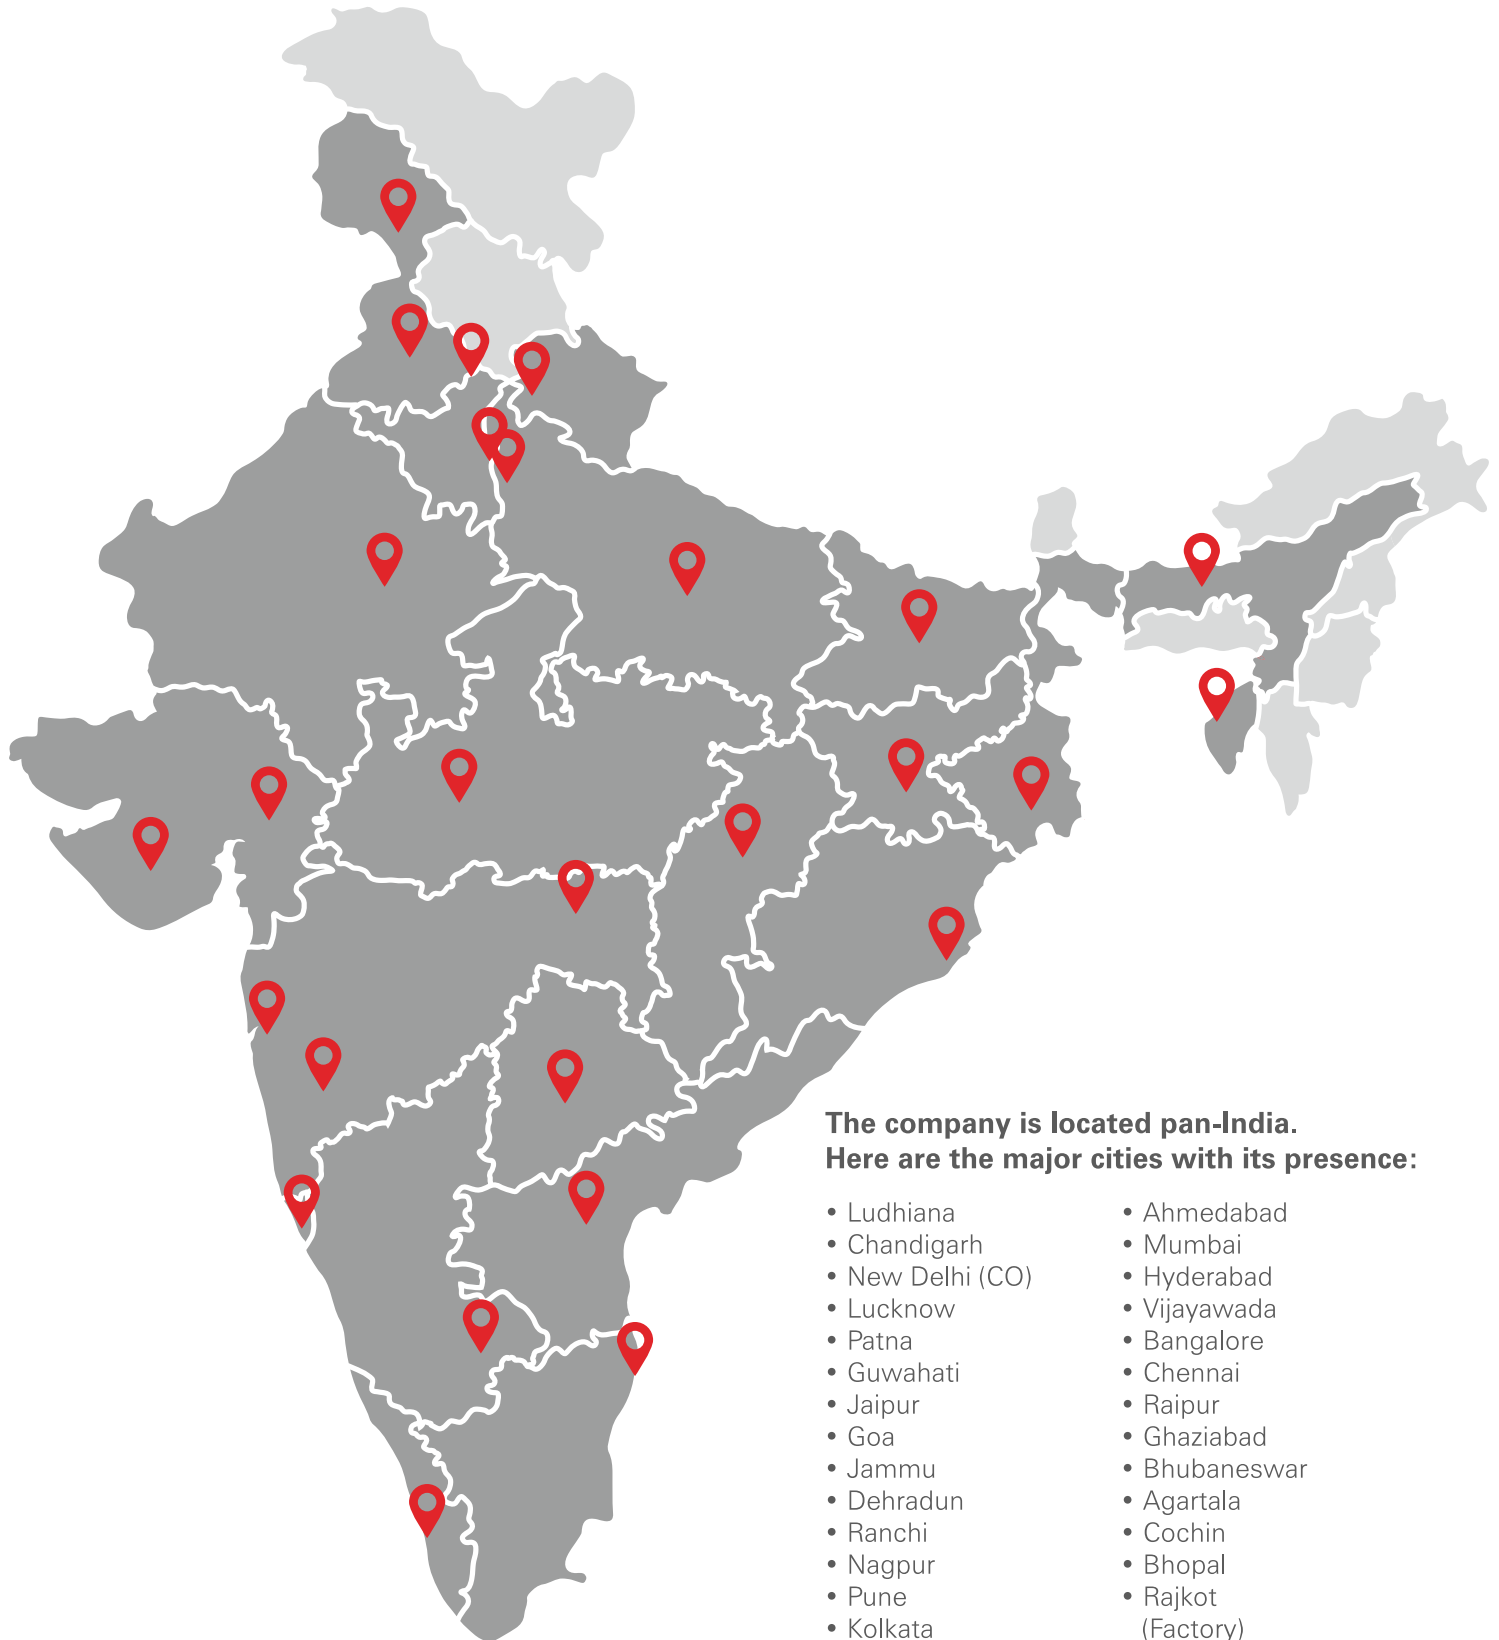

**The company is located pan-India.**

**Here are the major cities with its presence:**

- |                  |               |
|------------------|---------------|
| • Ludhiana       | • Ahmedabad   |
| • Chandigarh     | • Mumbai      |
| • New Delhi (CO) | • Hyderabad   |
| • Lucknow        | • Vijayawada  |
| • Patna          | • Bangalore   |
| • Guwahati       | • Chennai     |
| • Jaipur         | • Raipur      |
| • Goa            | • Ghaziabad   |
| • Jammu          | • Bhubaneswar |
| • Dehradun       | • Agartala    |
| • Ranchi         | • Cochin      |
| • Nagpur         | • Bhopal      |
| • Pune           | • Rajkot      |
| • Kolkata        | • (Factory)   |
| (Head office)    |               |

This map does not claim to be a complete or accurate map of India, and is used here just to represent our presence across the country.

## We have the trust and confidence of India's leading architects.

- Habitat Architects
  - RK Associates
  - STUP Consultants
  - Studio HBA
  - Kaif Faquih & Associates
  - Design Associates
  - Archi Hives
  - Fab Interiors
  - Kothari & Associates
  - CP Kukreja
  - Morphogenesis
  - Modus Design Studio
  - Kaleido
  - Sikka & Associates
- and 4000+ more designers.**

## We are grateful for the love we receive from our customers.



"Duro Products is an **inseparable element** in all of our projects."

**Naveen Gandhi**  
Architect  
B.G. Associates, Jaipur

"They honor their words, deliver on time, and render **excellent support service.**"

**Sapna Agarwal**  
Interior Designer  
ANSA Interiors, Delhi







"My **Dream Home** would have remained incomplete without **Duro**."

**Ravi Chettiar**  
Customer  
Chennai

"**Great return** on investment possible for our clients."

**Abhilash Das**  
Customer  
Kolkata



"**Duro** helped me renovate my office space, and the **finishing is excellent**."

**Vaani Gaikwad**  
Customer  
Pune



"The customer service is very **quick** and **understanding**!"

**Prithviraj Singh**  
Customer  
Jaipur





**We answer all your  
questions, always.**

**Q&A**

## Is Duroply very costly?



Simply put, you actually get the most value out of your money from Duroply than any other plywood brand.

Firstly, it's because unlike others, we offer **all features and technologies in one plywood** (refer to page no. 20-21). And second, our products give you the **promise of durability**. So you don't have to spend extra on maintenance or replacement.

Thus, **saving you more money** in the long run.

## I'm not very much aware about DURO. So how do I trust you?



At Duroply, our products have been part of our nation's households for 68+ years, offering them the safety and strength they expect and deserve out of plywood.

Furthermore, we have been **focused on building trust since 1957** and we have a long history of **innovations in the plywood industry** (refer to page no. 8-9).

Hence, we assure that **you can trust us**. Like the countless number of individuals and families that already have.

## Does Duroply take any steps to ensure sustainability?



Yes, we do. At DURO, we believe in sustainable foresting. It's why we follow a systematic approach to safeguard the health of the forests we operate in. Simply put, our tree cuts are replaced with new seedlings so that a healthy ecosystem can be carried and maintained. In addition, Duroply adheres to rigorous environment and sustainability standards including California Air Resources Board (CARB), Forest Stewardship Council® (FSC®) Chain of Custody (FSC-C108194), ISO 14000, E0 and E1.

Duro is also a member of The Indian Green Building Council (IGBC), validating its commitment to environment friendly practices, processes and certifications. Duroply's FSC® Certificate underscores our commitment for responsible sourcing and supplying of wood products and CARB certified products for low formaldehyde emission products upon customer requirements.

**We care about the environment as much as you do.**



Ask us for FSC® certified products





## How do you choose the raw materials for your products?



All raw materials are sourced by DURO from **across the globe**. And in order to maintain quality and uphold **our commitment to social and environmental responsibility**:

- We do not source from illegally harvested forests.
  - We do not harvest in violation of traditional or civil rights.
  - We do not harvest from forests where high conservation values are threatened by management activities.
  - We do not harvest from forests that are converted for plantations or non-forest uses.
  - We do not harvest from forests with genetically modified trees.
- 

## Can I trust the quality of Duro products?



Yes, you can. All our products leave our warehouse only after **20+ quality check parameters** to ensure long-lasting performance and durability. On top of that, we have an experienced team with a very sharp eye for detail.

So rest assured, **the product you buy will have the best quality in the plywood industry.**

---

## How will Duroply help me in buying plywood?



At DURO, we assist you at every step of the way:

- We have a well-trained staff of **180+ experts** that serve the purpose of briefing you regarding the right choice of an application area.
  - We have a **toll-free number** in case of any issue.
  - We have a **sales team** to understand your requirements in detail.
- 

## Do I get a guarantee on Duroply products?



Sure, you do. All Duro Products come with a **guarantee against insect infestation** ranging from **11 years to a lifetime**.

For more details, you can refer to our guarantee page (page no. 18-19).



## How do I claim a guarantee if my furniture gets infested by insects?

That's easy. All you need to do is register with **Duro's Unique Guarantee program**.

After that, just contact the local channel partner through whom you purchased your Duro products. Within hours, a digital copy of your certificate will be in your inbox that you can use to **claim your guarantee** later. For more details, refer to page no. 18-19.

---



## Are Duroply products easily available in the market?

When it comes to the availability of our products, you do not have anything to worry about. At Duro, we ensure a steady supply of materials through 15+ warehouses and **800+ distributors** across the country. So, no matter where you live, you're **most likely to have a DURO dealership near you**.

---



## Can I expect calibrated and consistent product from Duroply?

Yes, **uniformity and superior calibration** are things that make customers keep coming back to us.

Our superior substrate quality results in a **flawless finish** with **minimal undulation**, and our rigorous testing ensures the supply of **damage-free products** into the market. Hence, carpenters don't have to waste extra time during the woodwork process.

---



## Do I need a woodwork expert to handle Duroply products?

Hiring a good carpenter is always recommended. However, our products are very **easy to work with** and need **minimum effort**. Why, you ask? It's because of our superbly precise calibration that results in **reduced workmanship** and less time spent while crafting furniture.

---



## How can I choose the right plywood? Are there any recommendations to follow?

Don't worry. When it comes to making the right choice while buying plywood, we help you in every possible way. For that, you can download our **Smart Plywood Buying Guide** (refer to page no. 22) with **plenty of recommendations, expert advice and more**.

# **DURO Unique Guarantee Program Against Termites**

Protect your woodwork and enjoy peace of mind.  
With a guarantee against insect infestation ranging  
from 11 years to a lifetime.





At Duroply Industries Limited, we take pride in offering products guaranteed to perform against all insect attacks. Our commitment to quality includes anti-termite and borer treatment on all our products to protect against insect infestation.

However, in the highly unlikely event of any deterioration caused by insect infestation, we are here to address your concerns. Rest assured, we stand behind our guarantee and will take appropriate measures to resolve the issue to your satisfaction.



**Protection from insect infestation**



**Unique anti-termite treatment**



**Lifetime guarantee on all premium products**



**Authenticity & Transparency**



**3X Money Back Assurance**



**100% Satisfaction**

## How to Register with DURO's Guarantee Program?

It's simple! Just reach out to our channel partner from whom you purchased your DURO products. After that, you'll receive a digital copy of your certificate in your inbox within hours.



Was pleasantly surprised to see DURO providing a lifetime guarantee unlike any other brand.

**Dilip Kukreja**  
Haryana



The **Duro Guarantee Program** stands out in the industry, offering unparalleled experience.

**Anjana Murthy**  
Tamil Nadu

# **DURO<sup>TM</sup> ADVANTAGE**

## **Lifetime Guarantee**

### **9X Safety**

### **Plywood Ka Naya Standard**

Brands covered under  
**DURO<sup>®</sup> ADVANTAGE**

**DURO**  
**TITANIUM**  
LASTS FOREVER

**DURO**  
**DERBY<sup>®</sup>**  
THE CLUB GRADE BLOCK BOARD AND PLYWOOD

**DURO**  
**Pumaply<sup>®</sup>**  
ALL WEATHER PROOF PLYWOOD

**Durobord<sup>®</sup>**  
INDIA'S NO. 1 BLOCK BOARD

**DURO PLUS<sup>+</sup>**  
9' & 10' PLYWOOD | BOARDS | DOORS

**DURODOOR<sup>®</sup>**  
— FLUSH DOOR —  
KEEPS YOU SAFE

## Superior woodwork with reduced labour

Save time, get value for money



Superior  
Calibration



PFS  
Super Bonded

## No termite. No fraud. No harmful emissions.

Enjoy peace of mind



Termite and  
Borer-Proof



QR-Based  
Fraud Protection



Low Formaldehyde  
Emission

## Lifelong **DURO** bility Guaranteed

For those who won't settle for less



Five Heat  
Treatment



Duro Fireshield  
Technology



72 Hours  
BWP Grade



Super Log  
Criterion



# Resolve all your plywood challenges with our Smart Plywood Buying Guide.

Penned by  
Akhilesh Chitlangia, India's leading plywood expert.

I can't figure out the  
best plywood for my  
interiors

Should I buy  
branded plywood or  
is it ok to buy an  
unbranded one?

Is the dealer  
selling me the  
plywood that  
I need?

**Any of these  
questions bothering  
your mind?**

What are the different  
types and grades of  
plywood available in  
the market?

What quality aspects  
should I keep in mind  
while buying?


**Take it easy!**  
**Our Smart Plywood  
Buying Guide  
has all the answers.**

"Without the smart guide, I could  
not have made the best purchase  
like I did."

- Shruti Asna (Gurgaon)



Scan the QR code  
to download now

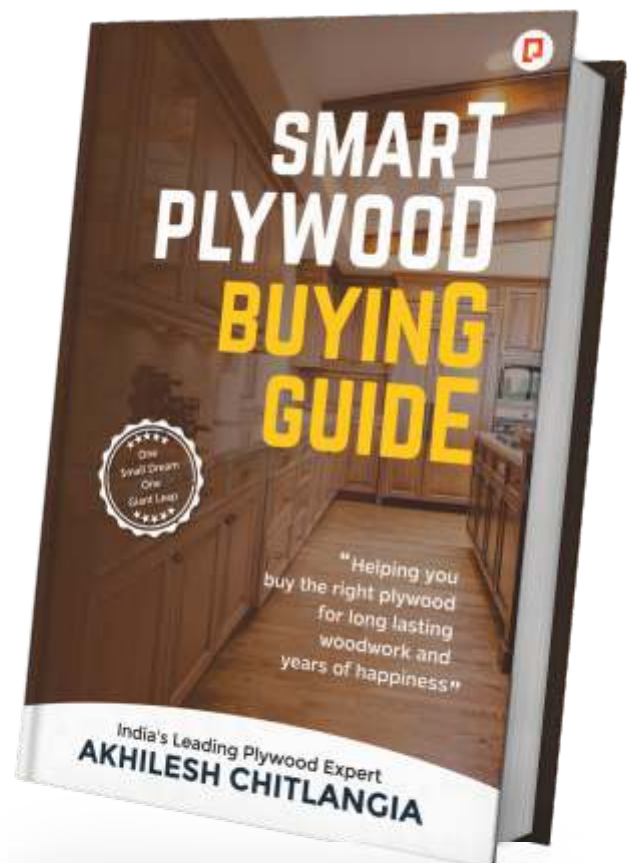



## Our official YouTube channel



Scan the QR code  
to watch now

Duro TV is committed to providing insightful information from industry experts to ensure you get the best value for your investment. Whether you're a homeowner, architect, interior designer, contractor, builder, or channel partner, our goal is to create exclusive content that helps turn your dream home into a reality.

### Our focus areas

#### Purchase Advice

How to buy the  
right plywood

#### Architecture and Design Trends

Latest discoveries in the world  
of design and architecture

#### Industry Secrets

Learn how designers solve  
the everyday needs of  
consumers

#### Dealers and Contractors

Growth stories of DURO's  
contractors and channel partners

#### DURO Beyond Blueprints

Let industry's top experts guide  
you on this podcast series



Now that you know everything about DURO, the decision is yours.

**Depend on a regular  
plywood company.  
or Choose a trusted  
brand with benefits that  
no one else can offer.**

**68** **+**  
*Years*  
OF EXPERIENCE



# Our Product Collection

## Delivered with the promise of DURObility

### 01 Premium Range 26-41

- Duro Titanium
  - Duro Pumaply
  - Duro Board
  - Duro Marine
  - Duro Derby
  - Duro Ply
  - Duro Flex
- 

### 02 Popular Range 42-47

- Duro MacPlatinum
  - Duro MacPrime
- 

### 03 Speciality Range 48-59

- Duro Techply
  - Duro Plus
  - Tower
  - Tower Platinum
- 

### 04 Decorative Veneers 60-65

- Duro Nature's Signature
  - Duro Teak
- 

### 05 Flush Doors 66-73

- Duro Door-Flush Door
  - Tower Door
  - Duro Techply Door
- 

\*Technical Specifications of the products are mentioned on page no. 74-91.



# Premium range

---

Finest Example of Durability, Quality & Reliability.



# DURO<sup>®</sup> TITANIUM

LASTS FOREVER

Made with the finest handpicked superior quality logs. It has a gapeless construction with PFS glue technology that enhance its durability.



Conforming IS : 710 – 2010



Five Heat Treatment



Duro Fireshield Technology



Termite and Borer-Proof



72 Hours BWP Grade



Super Log Criterion



Superior Calibration



PFS Super Bonded



Low Formaldehyde Emission



QR-Based Fraud Protection



## Lifetime Guarantee

Calibration:

**$\pm 0.4$   
mm**

Fire Protection:

**1.5  
min/mm**

Grade:

**BWP**

No. of  
Pressing:

**Triple**

# DURO<sup>®</sup> DERBY<sup>®</sup>

THE CLUB GRADE BLOCK BOARD AND PLYWOOD

Duro Derby is fire retardant, calibrated, and boiling waterproof at the same time. Its unique combination of properties makes it ideal for any interior and keeps your family safe, forever.



## Accordance IS : 5509 – 2021



Five Heat Treatment



Duro Advanced Fireshield Technology



Termite and Borer-Proof



72 Hours BWP Grade



Super Log Criterion



Superior Calibration



PFS Super Bonded



Low Formaldehyde Emission



QR-Based Fraud Protection





## Lifetime Guarantee

Calibration:

**$\pm 0.4$   
mm**

Fire Protection:

**2.5  
min/mm**

Grade:

**FR+  
BWP**

No. of  
Pressing:

**Triple**



## ALL WEATHER PROOF PLYWOOD

A 100% boiling waterproof plywood and has a superior fire resistant quality as well. Bonded with best quality phenol-formaldehyde resin that makes it long lasting.



### Accordance IS : 710 – 2010



Five Heat Treatment



Duro Fireshield Technology



Termite and Borer-Proof



72 Hours BWP Grade



Super Log Criterion



Superior Calibration



PFS Super Bonded



Low Formaldehyde Emission



QR-Based Fraud Protection





## Lifetime Guarantee

Calibration:

**$\pm 0.4$   
mm**

Fire Protection:

**1.5  
min/mm**

Grade:

**BWP**

No. of  
Pressing:

**Triple**



# Durobord®

INDIA'S NO. 1 BLOCK BOARD

Blockboards are dimensionally stable and can reframe from termite and wood destroying organisms. And its free from corrugation and gaps, that makes the surface smooth and wrap-free.



The teak strip for additional unique **genuine** identification

**Seasoned and tenderized** hardwood core veneer

**3" pine frames** for strength

**72 hours kiln seasoned** and conditioned pine filler for 0 warp

**Gapless, knot-free** construction

0.3 mm **A grade** face (highest in India)

Treated with **fire retardant** solution

Conforming IS : 1659 – 2004



Five Heat Treatment



Duro Fireshield Technology



Termite and Borer-Proof



72 Hours BWP Grade



Super Log Criterion



Superior Calibration



PFS Super Bonded



Low Formaldehyde Emission



QR-Based Fraud Protection



## Lifetime Guarantee

Calibration:

**$\pm 0.4$   
mm**

Fire Protection:

**1.5  
min/mm**

Grade:

**BWP/  
MR**

No. of  
Pressing:

**Triple**

# DUROPLY®

## COMMERCIAL PLYWOOD

Being the finest quality of moisture-resistant plywood, DuroPly is perfectly bonded, and specifically treated to withstand termites, borers, and moisture.



Conforming IS : 303 – 1989



Five Heat Treatment



Termite and Borer-Proof



Super Log Criterion



Superior Calibration



Low Formaldehyde Emission



QR-Based Fraud Protection





## Lifetime Guarantee

Calibration:

**$\pm 0.4$   
mm**

Grade:

**MR**

No. of  
Pressing:

**Triple**

# DUROFLEX<sup>®</sup>

## PREMIUM FLEXIBLE PLYWOOD

The ultra-flexible Duro Flex can be moulded and bent into any shape without chipping, cracking, peeling, or staining. With a bend radius of 25mm at 3mm thickness, it is ideal for tight curvature woodwork.



- **Core Veneer**- highest A grade core veneer
- **Seasoned and tenderized** hardwood core layers
- **Anti-termite and borer treatment** for insect infestation
- **CCA treatment** for anti-termite



Five Heat Treatment



Termite and Borer-Proof



72 Hours BWP Grade



Superior Calibration



Low Formaldehyde Emission



QR-Based Fraud Protection



## Lifetime Guarantee

Calibration:

**$\pm 0.4$   
mm**

Grade:

**BWP**

No. of  
Pressing:


**Triple**



# DURO MARINE<sup>TM</sup>

PREMIUM MARINE PLYWOOD & BLOCKBOARD

A waterproof plywood ideal for sea and water exposure area. It's highly resistant to fungi, termites, marine borers and other wood destroying organisms.

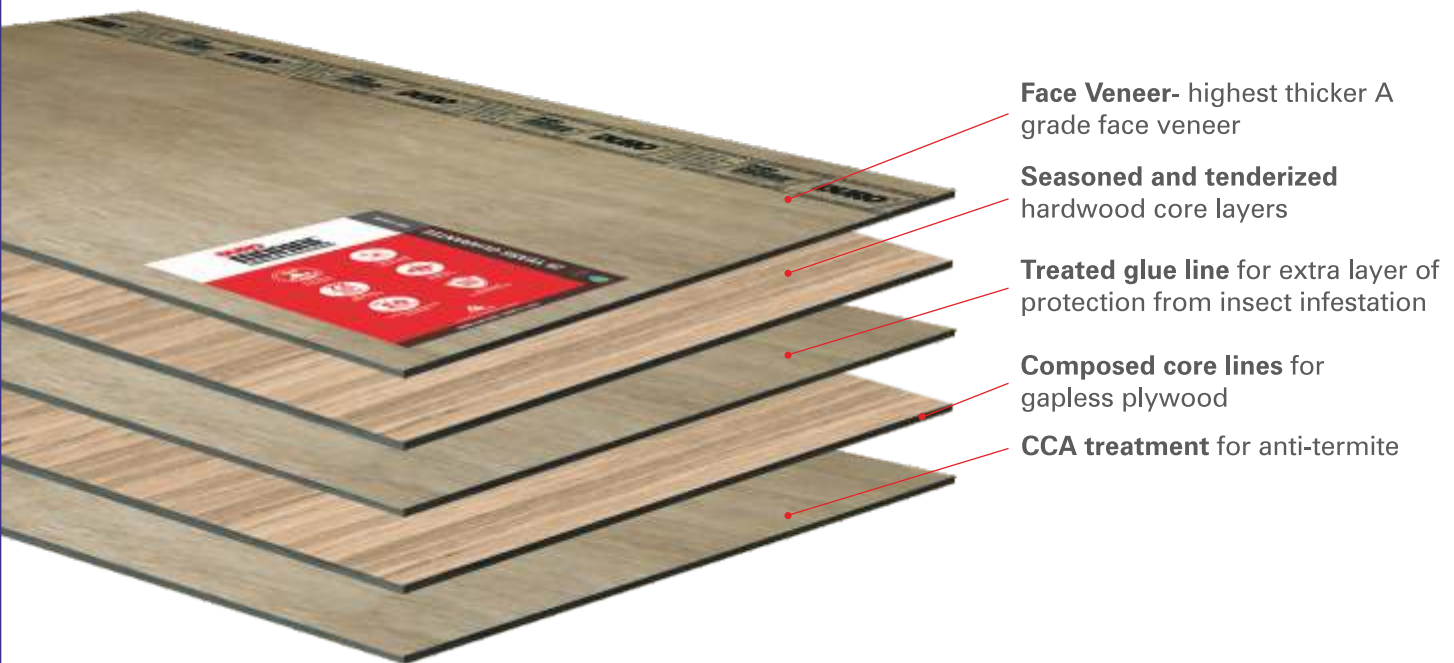

## Accordance IS : 710 – 2010



Five Heat Treatment



Termite and Borer-Proof



72 Hours BWP Grade



Superior Calibration



Low Formaldehyde Emission



QR-Based Fraud Protection



## 25 Years Guarantee

Calibration:

**$\pm 0.4$   
mm**

Grade:

**BWP**

No. of  
Pressing:

**Triple**







# Popular range

---

The right plywood paired with the right features for your needs.

# DURO<sup>®</sup> MACPLATINUM

## PLYWOOD AND BLOCK BOARDS

DURO MacPlatinum is crafted to suit your needs. It's water-proof, termite & borer-proof, and comes with superior calibration. Simply put, it has features as valuable as platinum itself.



Accordance IS : 710 – 2010



Five Heat  
Treatment



Termite and  
Borer-Proof



72 Hours  
BWP Grade



Superior  
Calibration



Low Formaldehyde  
Emission



QR-Based  
Fraud Protection



**21 Years Guarantee**

Calibration:

**$\pm 0.4$   
mm**

Grade:

**BWP\***

No. of  
Pressing:

**Triple**


\*In special cases, DURO MACPLATINUM is also available in MR Grade.



# DURO<sup>®</sup> MACPRIME

## PLYWOOD AND BLOCK BOARDS

It is all-weather and moisture-resistant, made from selectively matured wood and bonded with strong resin.

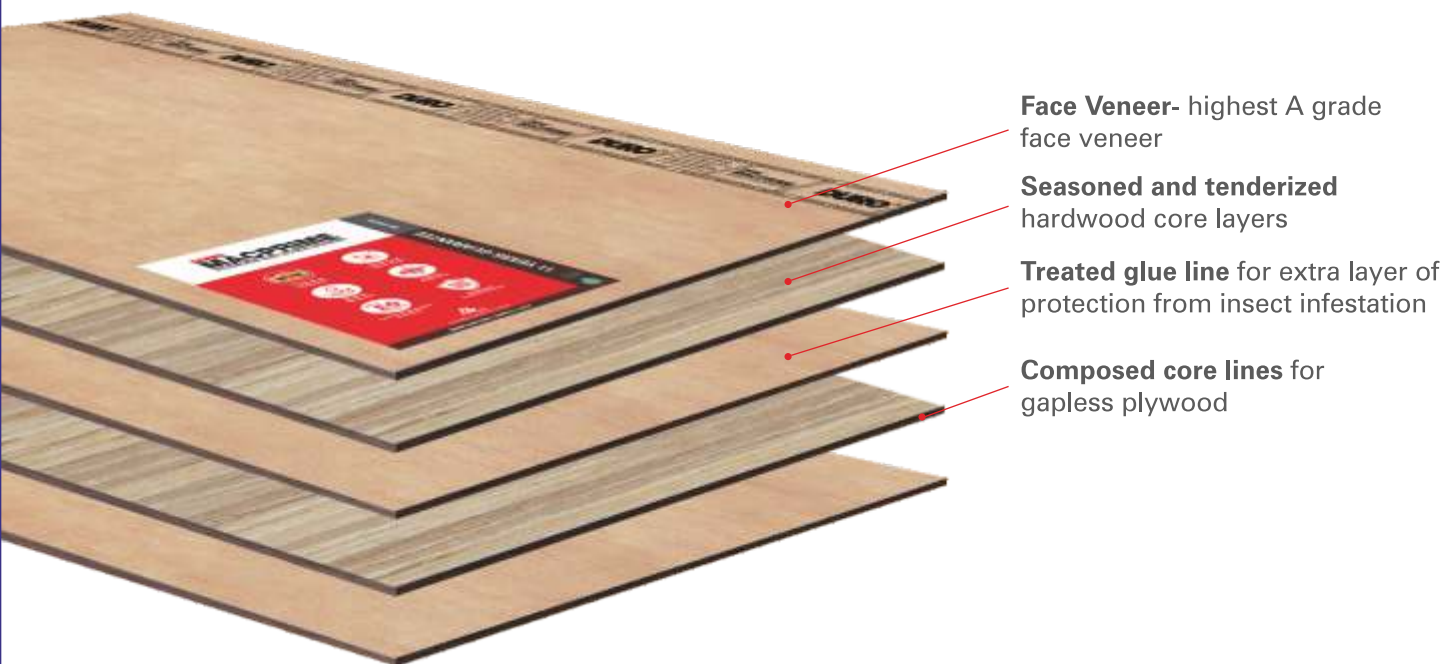

Confirming IS : 303-1989



Triple Heat Treatment



Termite and Borer-Proof



Water Resistant



Superior Calibration



Low Formaldehyde Emission



QR-Based Fraud Protection



## 15 Years Guarantee

Calibration:

**$\pm 0.4$   
mm**

Grade:

**MR\***

No. of  
Pressing:

**Triple**

In special cases, DURO MACPRIME is also available in BWP Grade.





# Speciality range


---

Specialised features for the special you.

# DURO<sup>®</sup> TECHPLY<sup>®</sup>

PLYWOOD • BLOCKBOARD  
ENGINEERED TO PERFECTION

Made from an amalgamation of tropical hardwood and european beech timber, Duro TechPly's closed grain decorative surface coupled with superior build and structural strength makes it a ready-to-finish product with a simple coat of polish.

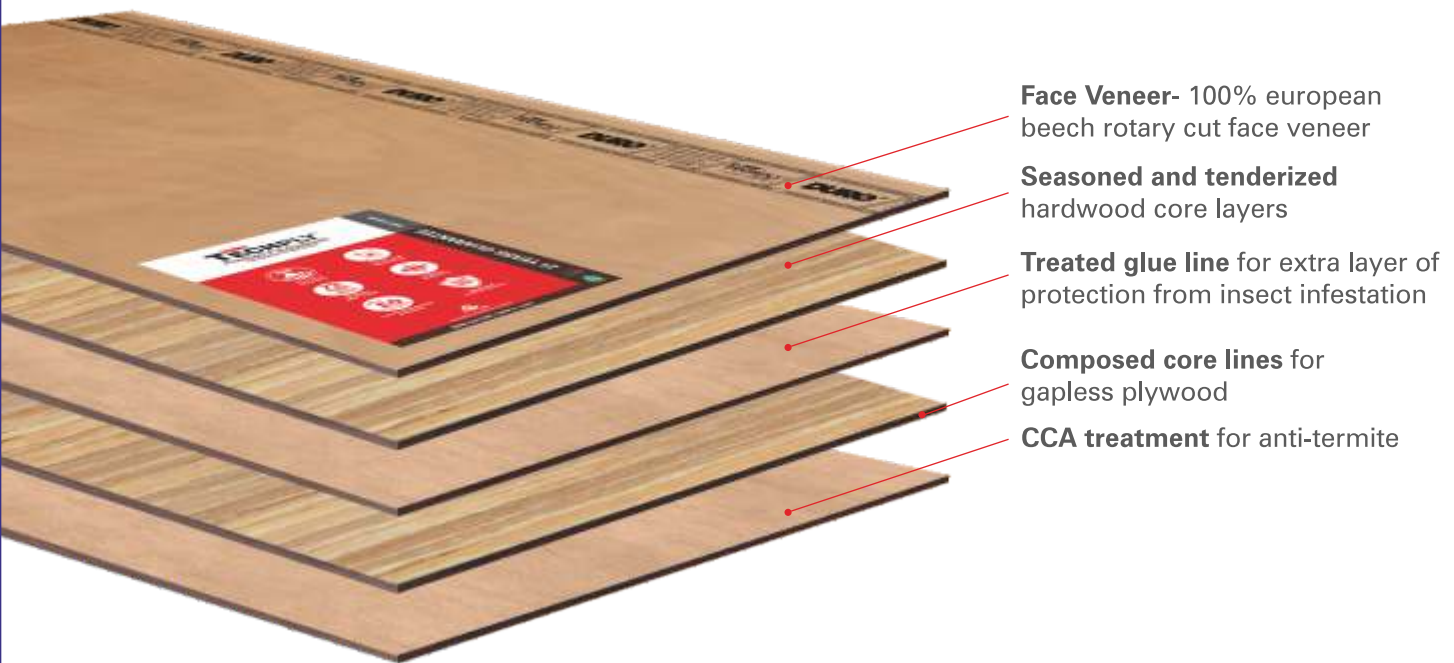

## Accordance IS : 710 – 2010



Five Heat Treatment



Termite and Borer-Proof



72 Hours BWP Grade



Superior Calibration



Low Formaldehyde Emission



QR-Based Fraud Protection



## 21 Years Guarantee

Calibration:

**$\pm 0.4$   
mm**

Grade:

**BWP**

No. of  
Pressing:

**Triple**



# DURO<sup>®</sup> PLUS<sup>+</sup>

9' & 10' PLYWOOD | BOARDS | DOORS

The most innovative plywood in the last 68+ years, Duro Plus is ideal for unique architectural solutions that require jointless applications. It is easy to install, offers value-for-money, and saves time.



## Accordance IS : 710 – 2010



Five Heat Treatment



Duro Fireshield Technology



Termite and Borer-Proof



72 Hours BWP Grade



Super Log Criterion



Superior Calibration



PFS Super Bonded



Low Formaldehyde Emission



QR-Based Fraud Protection



## Lifetime Guarantee

Calibration:

**$\pm 0.4$   
mm**

Fire Protection:

**1.5  
min/mm**

Grade:

**BWP/  
MR**

No. of  
Pressing:

**Triple**



It's made from raw materials sourced from sustainable plantations that's specially treated to increase longevity.



### Accordance IS : 710 – 2010



Triple Heat Treatment



Termite and Borer-Proof



72 Hours BWP Grade



Heat Resistant



Low Formaldehyde Emission



QR-Based Fraud Protection





**11 Years Warranty**

Calibration:

**$\pm 0.5$   
mm**

Grade:

**BWP**

No. of  
Pressing:

**Double**



It's made from raw materials sourced from sustainable plantations that's specially treated to increase longevity.



Conforming IS : 303 – 1989



Triple Heat Treatment



Termite and Borer-Proof



Heat Resistant



Low Formaldehyde Emission



QR-Based Fraud Protection



**11 Years Warranty**

Calibration:

**$\pm 0.5$   
mm**

Grade:

**MR**

No. of  
Pressing:

**Double**





**BOARD & PLY**

Made from top-grade hardwood, it offers extra durability and strength for all your architectural needs.



**Accordance IS : 710 – 2010**



Triple Heat Treatment



Termite and Borer-Proof



72 Hours BWP Grade



Heat Resistant



Low Formaldehyde Emission



QR-Based Fraud Protection



**18 Years Warranty**

Calibration:

**$\pm 0.5$   
mm**

Grade:

**BWP**

No. of  
Pressing:

**Double**





# Decorative veneer

---

Inspired by Nature. Crafted with perfection.

# DURO<sup>®</sup> NATURE'S SIGNATURE<sup>®</sup>

PREMIUM VENEERS & PLYWOODS

Produced responsibly, designed to delight, and favoured by designers across India, Duro Nature's Signature is India's largest range of natural premium veneers with path-breaking technology and peerless standards of quality and aesthetics.



Triple Heat  
Treatment



Double pressed on  
Hardwood Plywood



Termite and  
Borer-Proof



A++ Grade



Superior  
Calibration



No  
Corrugation



Extra  
Back face



Low Formaldehyde  
Emission



QR-Based  
Fraud Protection

Conforming IS : 1328-1996



## DURO Nature's Signature Range

*Dyed*  
— Vibrant And Vivid Veneers —



**BURLS**  
THE DIAMOND OF WOOD

**fumed**  
Smoking For The Wood

**AURA**  
A Sinful Range of Indulgent Veneers

*Metallic*  
— Looks Like Metal, Feels Like Wood —

**mystic**  
VENEERS  
NATURE'S HIDDEN TREASURES



**BOHEMIA**  
Textured Veneer Panels

**MASTERPIECE**  
HYBRID ARCHITECTURAL VENEERS

**Lifetime Guarantee**

Calibration:

**$\pm 0.4$   
mm**

Grade:

**MR**

No. of  
Pressing:

**Triple**



# DURO TEAK<sup>®</sup>

## TEAK DECORATIVE PLYWOOD

Made with sustainably sourced raw materials from forests in India and Myanmar, Duro Teak offers the best, hand-selected timbers at a higher thickness.



Triple Heat Treatment




Termite and Borer-Proof



A++ Grade



Superior Calibration



No Corrugation



Low Formaldehyde Emission



QR-Based Fraud Protection

Conforming IS : 1328-1996



## DURO Teak Range



Choco Fondant



Choco Forest



Royal Teak



Marvallo Teak



Teak Quarter



Grainless Tectonia

## Lifetime Guarantee

Calibration:

**$\pm 0.4$   
mm**

Grade:

**MR**

No. of  
Pressing:

**Triple**





# Flush doors


---

Premium doors with strength that you can rely on.

# DURODOOR®

FLUSH DOOR  
KEEPS YOU SAFE

Made from high-quality kiln seasoned timber, Duro Door is dimensionally stable, has a high vertical load-bearing strength, and is treated for termite resistance to ensure long-lasting performance.

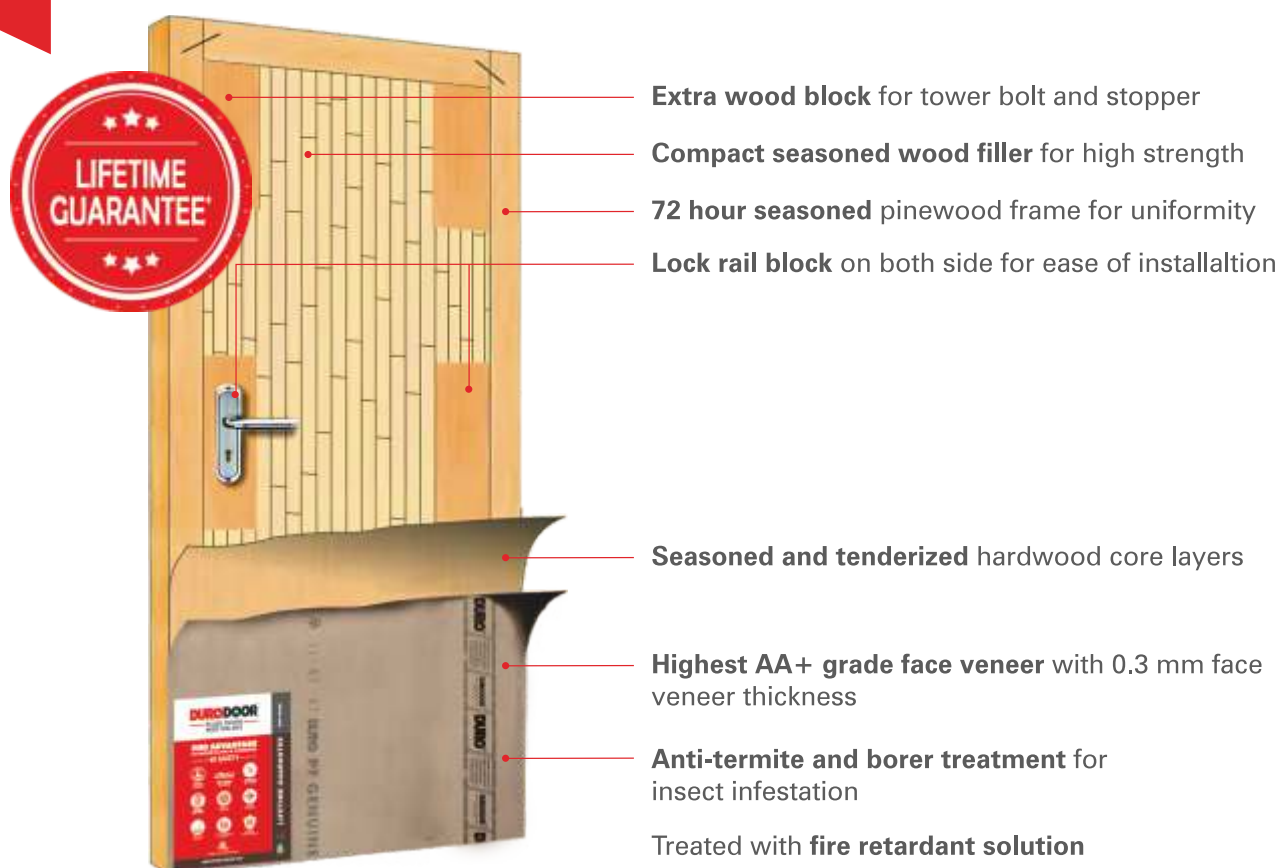

Conforming to IS : 2202 (Part 1) - 1999



Five Heat Treatment



Duro Fireshield Technology



Termite and Borer-Proof



72 Hours BWP Grade



Super Log Criterion



Superior Calibration



PFS Super Bonded



Low Formaldehyde Emission



QR-Based Fraud Protection



## Lifetime Guarantee

Calibration:

**$\pm 0.4$   
mm**

Fire Protection:

**1.5  
min/mm**

Grade:

**BWP**

No. of  
Pressing:


**Triple**



# DURO<sup>®</sup> TECHPLY<sup>®</sup> DOORS

ENGINEERED TO PERFECTION

Made from extruded particle boards that are sourced from Germany, Duro TechPly door ensures that the product is dimensionally stable, has superior sound absorption properties, and a strong load-bearing strength with no chance of warping or shrinkage.

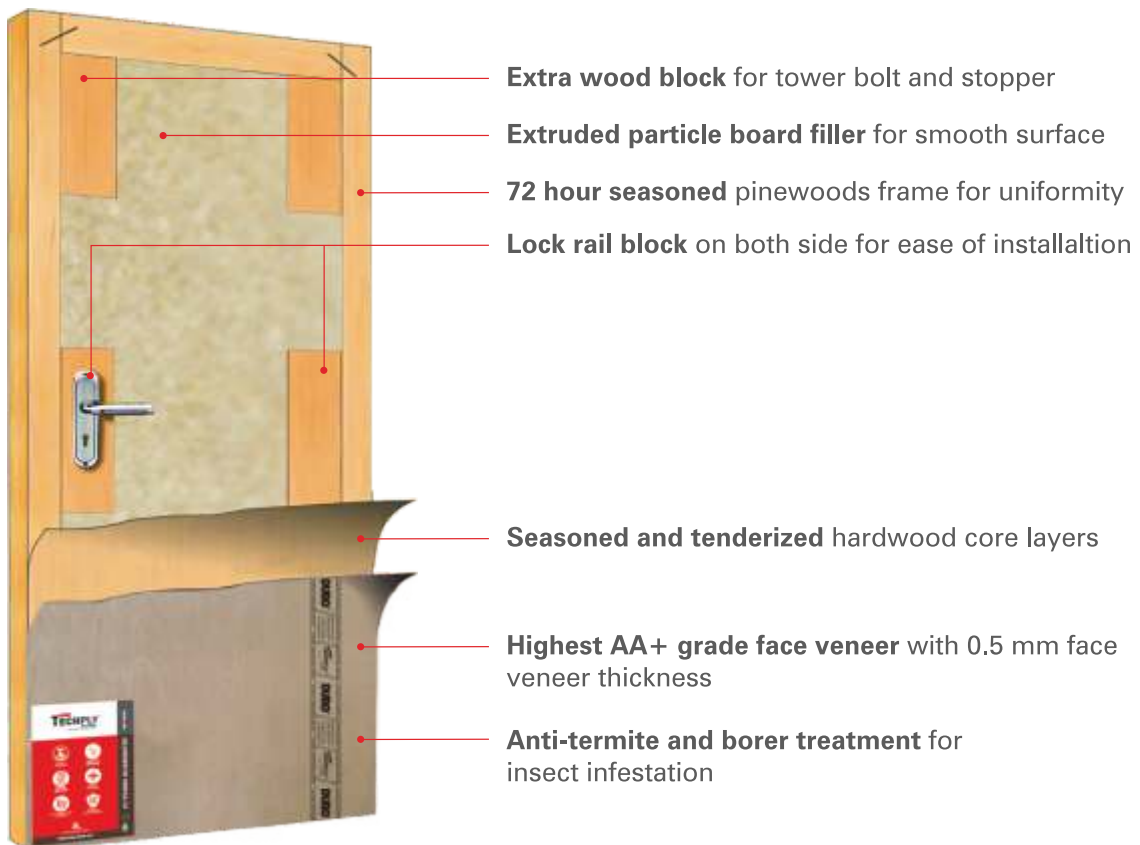

Conforming to IS : 2202 (Part 1) - 1999



Five Heat  
Treatment



Termite and  
Borer-Proof



72 Hours  
BWP Grade



Superior  
Calibration



Low Formaldehyde  
Emission



QR-Based  
Fraud Protection



## 21 Years Guarantee

Calibration:

**$\pm 0.4$   
mm**

Grade:


**BWP**

No. of  
Pressing:

**Triple**



Duro Tower Doors are an economical range made from well-seasoned, eco-friendly timbers with solid construction. They undergo Duro's unique THT process to ensure dimensional stability and protection against insect infestation.

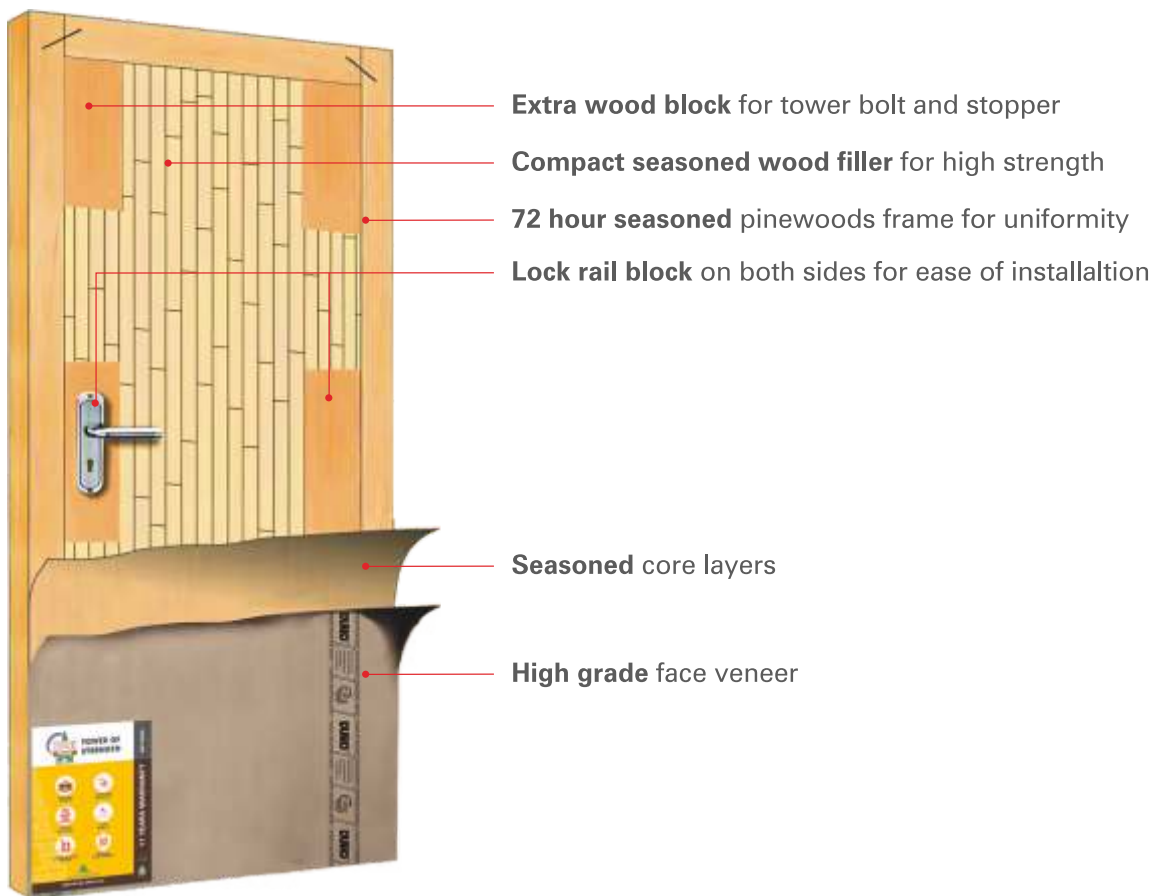

Conforming to IS : 2202 (Part 1) - 1999



Triple Heat Treatment



Termite and Borer-Proof



72 Hours BWP Grade



Heat Resistant



Low Formaldehyde Emission



QR-Based Fraud Protection





**11 Years Warranty**

Calibration:

**$\pm 0.5$   
mm**

Grade:

**BWP**

No. of  
Pressing:

**Double**



# Technical Specifications

## Technical specification of DURO Titanium Ply for BWP Grade

Conforming IS: 710-2010



| S. No. | Tests prescribed                                  | Value for conformity                                       | Duro value                                       |
|--------|---------------------------------------------------|------------------------------------------------------------|--------------------------------------------------|
| 1      | Moisture Content % (Clause 9.1.1)                 | 5% - 15 %                                                  | 7.85%                                            |
| 2      | Glue Shear Strength (in Dry state) (Clause 9.1.2) | Min. 1100 N/MM <sup>2</sup><br>Avg. 1350 N/MM <sup>2</sup> | 1320 N/MM <sup>2</sup><br>1550 N/MM <sup>2</sup> |
| 3      | Adhesion of Plies (Clause 9.1.5)                  | Min. Pass Standard                                         | Excellent Bonding                                |
| 4      | Glue Shear Strength (in Wet state) (Clause 9.1.3) | Min. 800 N/MM <sup>2</sup><br>Avg. 1000 N/MM <sup>2</sup>  | 962 N/MM <sup>2</sup><br>1185 N/MM <sup>2</sup>  |
| 5      | Tensile Strength                                  |                                                            |                                                  |
|        | Along the Grain                                   | 42 N/MM <sup>2</sup>                                       | 50 N/MM <sup>2</sup>                             |
|        | Across the Grain                                  | 25 N/MM <sup>2</sup>                                       | 39 N/MM <sup>2</sup>                             |
|        | Sum of Tensile Strength (a+b)                     | 84.5 N/MM <sup>2</sup>                                     | 89 N/MM <sup>2</sup>                             |
| 6      | Static Bending Strength (Clause 9.1.6)            |                                                            |                                                  |
|        | <b>Modulus of Elasticity</b>                      |                                                            |                                                  |
|        | Along the Grain                                   | 7500 N/MM <sup>2</sup>                                     | 7785 N/MM <sup>2</sup>                           |
|        | Across the Grain                                  | 4000 N/MM <sup>2</sup>                                     | 4292 N/MM <sup>2</sup>                           |
|        | <b>Modulus of Rapture</b>                         |                                                            |                                                  |
|        | Along the Grain                                   | 50 N/MM <sup>2</sup>                                       | 56 N/MM <sup>2</sup>                             |
|        | Across the Grain                                  | 30 N/MM <sup>2</sup>                                       | 36 N/MM <sup>2</sup>                             |
|        | <b>Water Resistance Test (Clause 9.2.2)</b>       | No Delamination after 72 hrs boiling                       | No Delamination                                  |

## Technical specification of DURO Titanium Board for BWP Grade

Conforming IS : 1659 - 2004 Amendment No- 02



| S. No. | Tests prescribed                     | Value for conformity                 | Duro value             |
|--------|--------------------------------------|--------------------------------------|------------------------|
| 1      | Adhesion of Plies (Clause 9.2.2)     | Min. Pass Standard                   | Excellent bonding      |
| 2      | Moisture Content %                   | 5% - 15 %                            | 8.75%                  |
| 3      | Modulus of Elasticity (Clause 9.2.5) | 5000 N/MM <sup>2</sup>               | 5430 N/MM <sup>2</sup> |
| 4      | Modulus of Rapture (Clause 9.2.5)    | 50 N/MM <sup>2</sup>                 | 55 N/MM <sup>2</sup>   |
| 5      | Squareness Test (%) (Clause 7)       | 0.2 (Max)                            | 0.13                   |
| 6      | Edge Straightness (%) (Clause 7)     | 0.2 (Max)                            | 0.09                   |
| 7      | Water Resistance Test (Clause 9.2.2) | No Delamination after 72 hrs boiling | No Delamination        |



## Technical specification of DURO Derby Ply for BWP Grade

Accordance IS :5509 – 2021 Type-5



| S. No. | Test                | Prescribed Value                                                                                                     | Result   |
|--------|---------------------|----------------------------------------------------------------------------------------------------------------------|----------|
| 1      | Moisture Contents % | 5 – 15 %                                                                                                             | 8 – 12 % |
| 2      | Flamability         | Time taken for the second ignition shall not be less then 30 Min.                                                    | 45 Min   |
| 3      | Flame Penetration   | The time taken for flame penetration shall not be less than 15 minutes for every 6 mm thickness. (15/6xt in minutes) | 149 Min  |
| 4      | Rate of Burning     | Time taken to loss weight from 30 % to 70% shall not be less then 20 Min                                             | 59 Min   |

## Technical specification of DURO Derby Board for BWP Grade

Conforming IS : 1659 - 2004 Amendment No- 02



| S. No. | Tests prescribed                     | Value for conformity                 | Duro value             |
|--------|--------------------------------------|--------------------------------------|------------------------|
| 1      | Adhesion of Plies (Clause 9.2.2)     | Min. Pass Standard                   | Excellent bonding      |
| 2      | Moisture Content %                   | 5% - 15 %                            | 8.75%                  |
| 3      | Modulus of Elasticity (Clause 9.2.5) | 5000 N/MM <sup>2</sup>               | 5420 N/MM <sup>2</sup> |
| 4      | Modulus of Rapture (Clause 9.2.5)    | 50 N/MM <sup>2</sup>                 | 53 N/MM <sup>2</sup>   |
| 5      | Squareness Test (%) (Clause 7)       | 0.2 (Max)                            | 0.13                   |
| 6      | Edge Straightness (%) (Clause 7)     | 0.2 (Max)                            | 0.09                   |
| 7      | Water Resistance Test (Clause 9.2.2) | No Delamination after 72 hrs boiling | No Delamination        |

## Technical specification of DURO Pumaply Ply for BWP Grade

Accordance IS : 710 – 2010



| S. No. | Tests prescribed                                  | Value for conformity                 | Duro value             |
|--------|---------------------------------------------------|--------------------------------------|------------------------|
| 1      | Moisture Content % (Clause 9.1.1)                 | 5% - 15 %                            | 7.85%                  |
| 2      | Glue Shear Strength (in Dry state) (Clause 9.1.2) | Min. 1100 N/MM <sup>2</sup>          | 1220 N/MM <sup>2</sup> |
|        |                                                   | Avg. 1350 N/MM <sup>2</sup>          | 1450 N/MM <sup>2</sup> |
| 3      | Adhesion of Plies (Clause 9.1.5)                  | Min. Pass Standard                   | Excellent Bonding      |
| 4      | Glue Shear Strength (in Wet state) (Clause 9.1.3) | Min. 800 N/MM <sup>2</sup>           | 922 N/MM <sup>2</sup>  |
|        |                                                   | Avg. 1000 N/MM <sup>2</sup>          | 1175 N/MM <sup>2</sup> |
| 5      | Tensile Strength                                  |                                      |                        |
|        | Along the Grain                                   | 42 N/MM <sup>2</sup>                 | 49 N/MM <sup>2</sup>   |
|        | Across the Grain                                  | 25 N/MM <sup>2</sup>                 | 32 N/MM <sup>2</sup>   |
|        | Sum of Tensile Strength (a+b)                     | 84.5 N/MM <sup>2</sup>               | 87 N/MM <sup>2</sup>   |
| 6      | Static Bending Strength (Clause 9.1.6)            |                                      |                        |
|        | <b>Modulus of Elasticity</b>                      |                                      |                        |
|        | Along the Grain                                   | 7500 N/MM <sup>2</sup>               | 7685 N/MM <sup>2</sup> |
|        | Across the Grain                                  | 4000 N/MM <sup>2</sup>               | 4252 N/MM <sup>2</sup> |
|        | <b>Modulus of Rapture</b>                         |                                      |                        |
|        | Along the Grain                                   | 50 N/MM <sup>2</sup>                 | 55 N/MM <sup>2</sup>   |
|        | Across the Grain                                  | 30 N/MM <sup>2</sup>                 | 34 N/MM <sup>2</sup>   |
|        | <b>Water Resistance Test (Clause 9.2.2)</b>       | No Delamination after 72 hrs boiling | No Delamination        |

## Technical specification of DuroPly for MR Grade

Conforming IS : 303 – 1989 Amendment No -06



| S. No. | Test prescribed                              | Value for conformity                                                                           | Duro value             |
|--------|----------------------------------------------|------------------------------------------------------------------------------------------------|------------------------|
| 1      | Glue Adhesion (Clause 11.2)                  | Min. Pass Standard                                                                             | Excellent Bonding      |
| 2      | Moisture Content % (Clause 11.3)             | 5 % - 15 %                                                                                     | 9.85%                  |
| 3      | Static Bending Strength (Clause 11.4)        |                                                                                                |                        |
|        | <b>Modulus of Elasticity</b>                 |                                                                                                |                        |
|        | Along the Grain                              | 4000 N/MM <sup>2</sup>                                                                         | 4525 N/MM <sup>2</sup> |
|        | Across the Grain                             | 2000 N/MM <sup>2</sup>                                                                         | 2259 N/MM <sup>2</sup> |
|        | <b>Modulus of Rapture</b>                    |                                                                                                |                        |
|        | Along the Grain                              | 30 N/MM <sup>2</sup>                                                                           | 35 N/MM <sup>2</sup>   |
|        | Across the Grain                             | 15 N/MM <sup>2</sup>                                                                           | 20 N/MM <sup>2</sup>   |
| 4      | <b>Water Resistance Test (Clause 11.2.1)</b> | No Delamination after 3 hrs.<br>at 60 °C ± 2 °C<br>for 3 Cycle Soaking & Drying same condition | No Delamination        |

## Technical specification of DURO Board for MR Grade

Conforming IS : 1659 - 2004 Amendment No- 02



| S. No. | Tests prescribed                     | Value for conformity                                                                        | Duro value             |
|--------|--------------------------------------|---------------------------------------------------------------------------------------------|------------------------|
| 1      | Adhesion of Plies (Clause 9.2.2)     | Min. Pass Standard                                                                          | Excellent bonding      |
| 2      | Moisture Content %                   | 5% - 15 %                                                                                   | 8.79%                  |
| 3      | Modulus of Elasticity (Clause 9.2.5) | 4000 N/MM <sup>2</sup>                                                                      | 4120 N/MM <sup>2</sup> |
| 4      | Modulus of Rapture (Clause 9.2.5)    | 40 N/MM <sup>2</sup>                                                                        | 42 N/MM <sup>2</sup>   |
| 5      | Squareness Test (%) (Clause 7)       | 0.2 (Max)                                                                                   | 0.11                   |
| 6      | Edge Straightness (%) (Clause 7)     | 0.2 (Max)                                                                                   | 0.1                    |
| 7      | Water Resistance Test (Clause 9.2.2) | No Delamination after 3 hrs<br>at 60°C ± 2°C<br>for 3 Cycle Soaking & Drying same condition | No Delamination        |

## Technical specification of DURO Board for BWP Grade

Conforming IS : 1659 - 2004 Amendment No- 02



| S. No. | Tests prescribed                     | Value for conformity                 | Duro value             |
|--------|--------------------------------------|--------------------------------------|------------------------|
| 1      | Adhesion of Plies (Clause 9.2.2)     | Min. Pass Standard                   | Excellent bonding      |
| 2      | Moisture Content %                   | 5% - 15 %                            | 8.75%                  |
| 3      | Modulus of Elasticity (Clause 9.2.5) | 5000 N/MM <sup>2</sup>               | 5420 N/MM <sup>2</sup> |
| 4      | Modulus of Rapture (Clause 9.2.5)    | 50 N/MM <sup>2</sup>                 | 53 N/MM <sup>2</sup>   |
| 5      | Squareness Test (%) (Clause 7)       | 0.2 (Max)                            | 0.13                   |
| 6      | Edge Straightness (%) (Clause 7)     | 0.2 (Max)                            | 0.09                   |
| 7      | Water Resistance Test (Clause 9.2.2) | No Delamination after 72 hrs boiling | No Delamination        |

## Technical specification of DURO Flex for BWP Grade



| S. No. | Special Feature                                                                                        |
|--------|--------------------------------------------------------------------------------------------------------|
| 1      | Duro Flex is an 8"X4" (2440 mm x 1220 mm) flexible plywood sheet which can be bent easily by hand      |
| 2      | A bend radius as little as 25mm makes this product ideal for tight radius work.                        |
| 3      | Duroflex can be bonded together in its curved form to produce any thickness as required.               |
| 4      | Standard thicknesses available are 3 mm, 6 mm, 8 mm, 12 mm and 16 mm.                                  |
| 5      | 6mm and 8mm are in long or cross grain, 3mm, 12mm and 16mm in cross grain only.                        |
| 6      | Cross grain will produce a 4' (1220 mm) column.                                                        |
| 7      | Long grain will produce an 8' (2440mm) column.                                                         |
| 8      | Duroflex can be stained, painted, plastered, veneered or given any other finish - the choice is yours. |
| 9      | Unlike pre-made forms Duroflex is supplied in flat 1220mm x 2440 mm (4' x 8') sheets.                  |



## Technical specification of DURO Marine Ply for BWP Grade

Accordance IS : 710 – 2010



| S. No. | Tests prescribed                                  | Value for conformity                 | Duro value             |
|--------|---------------------------------------------------|--------------------------------------|------------------------|
| 1      | Moisture Content % (Clause 9.1.1)                 | 5% - 15 %                            | 7.85%                  |
| 2      | Glue Shear Strength (in Dry state) (Clause 9.1.2) | Min. 1100 N/MM <sup>2</sup>          | 1350 N/MM <sup>2</sup> |
|        |                                                   | Avg. 1350 N/MM <sup>2</sup>          | 1560 N/MM <sup>2</sup> |
| 3      | Adhesion of Plies (Clause 9.1.5)                  | Min. Pass Standard                   | Excellent Bonding      |
| 4      | Glue Shear Strength (in Wet state) (Clause 9.1.3) | Min. 800 N/MM <sup>2</sup>           | 982 N/MM <sup>2</sup>  |
|        |                                                   | Avg. 1000 N/MM <sup>2</sup>          | 1185 N/MM <sup>2</sup> |
| 5      | Tensile Strength                                  |                                      |                        |
|        | Along the Grain                                   | 42 N/MM <sup>2</sup>                 | 52 N/MM <sup>2</sup>   |
|        | Across the Grain                                  | 25 N/MM <sup>2</sup>                 | 40 N/MM <sup>2</sup>   |
|        | Sum of Tensile Strength (a+b)                     | 84.5 N/MM <sup>2</sup>               | 92 N/MM <sup>2</sup>   |
| 6      | Static Bending Strength (Clause 9.1.6)            |                                      |                        |
|        | <b>Modulus of Elasticity</b>                      |                                      |                        |
|        | Along the Grain                                   | 7500 N/MM <sup>2</sup>               | 7885 N/MM <sup>2</sup> |
|        | Across the Grain                                  | 4000 N/MM <sup>2</sup>               | 4552 N/MM <sup>2</sup> |
|        | <b>Modulus of Rapture</b>                         |                                      |                        |
|        | Along the Grain                                   | 50 N/MM <sup>2</sup>                 | 57 N/MM <sup>2</sup>   |
|        | Across the Grain                                  | 30 N/MM <sup>2</sup>                 | 38 N/MM <sup>2</sup>   |
|        | <b>Water Resistance Test (Clause 9.2.2)</b>       | No Delamination after 72 hrs boiling | No Delamination        |

## Technical specification of DURO Marine Board for BWP Grade

Conforming IS : 1659 - 2004 Amendment No- 02



| S. No. | Tests prescribed                     | Value for conformity                 | Duro value             |
|--------|--------------------------------------|--------------------------------------|------------------------|
| 1      | Adhesion of Plies (Clause 9.2.2)     | Min. Pass Standard                   | Excellent bonding      |
| 2      | Moisture Content %                   | 5% - 15 %                            | 8.75%                  |
| 3      | Modulus of Elasticity (Clause 9.2.5) | 5000 N/MM <sup>2</sup>               | 5420 N/MM <sup>2</sup> |
| 4      | Modulus of Rapture (Clause 9.2.5)    | 50 N/MM <sup>2</sup>                 | 53 N/MM <sup>2</sup>   |
| 5      | Squareness Test (%) (Clause 7)       | 0.2 (Max)                            | 0.13                   |
| 6      | Edge Straightness (%) (Clause 7)     | 0.2 (Max)                            | 0.09                   |
| 7      | Water Resistance Test (Clause 9.2.2) | No Delamination after 72 hrs boiling | No Delamination        |

## Technical specification of DURO Macplatinum Ply for BWP Grade

Accordance IS : 710 – 2010

**DURO**  
**MACPLATINUM**  
PLYWOOD AND BLOCK BOARDS

| S. No. | Tests prescribed                                  | Value for conformity                 | Duro value             |
|--------|---------------------------------------------------|--------------------------------------|------------------------|
| 1      | Moisture Content % (Clause 9.1.1)                 | 5% - 15 %                            | 7.85%                  |
| 2      | Glue shear Strength (in Dry state) (Clause 9.1.2) | Min. 1100 N/MM <sup>2</sup>          | 1215 N/MM <sup>2</sup> |
|        |                                                   | Avg. 1350 N/MM <sup>2</sup>          | 1410 N/MM <sup>2</sup> |
| 3      | Adhesion of Plies (Clause 9.1.5)                  | Min. Pass Standard                   | Excellent bonding      |
| 4      | Glue shear Strength (in Wet state) (Clause 9.1.3) | Min. 800 N/MM <sup>2</sup>           | 910 N/MM <sup>2</sup>  |
|        |                                                   | Avg. 1000 N/MM <sup>2</sup>          | 1155 N/MM <sup>2</sup> |
| 5      | Tensile Strength                                  |                                      |                        |
|        | Along the Grain                                   | 42 N/MM <sup>2</sup>                 | 47 N/MM <sup>2</sup>   |
|        | Across the Grain                                  | 25 N/MM <sup>2</sup>                 | 36 N/MM <sup>2</sup>   |
|        | Sum of Tensile Strength (a+b)                     | 84.5 N/MM <sup>2</sup>               | 86 N/MM <sup>2</sup>   |
| 6      | Static Bending Strength (Clause 9.1.6)            |                                      |                        |
|        | <b>Modulus of Elasticity</b>                      |                                      |                        |
|        | Along the Grain                                   | 7500 N/MM <sup>2</sup>               | 7625 N/MM <sup>2</sup> |
|        | Across the Grain                                  | 4000 N/MM <sup>2</sup>               | 4198 N/MM <sup>2</sup> |
|        | <b>Modulus of Rapture</b>                         |                                      |                        |
|        | Along the Grain                                   | 50 N/MM <sup>2</sup>                 | 53 N/MM <sup>2</sup>   |
|        | Across the Grain                                  | 30 N/MM <sup>2</sup>                 | 33 N/MM <sup>2</sup>   |
|        | <b>Water Resistance Test (Clause 9.2.2)</b>       | No Delamination after 72 hrs boiling | No Delamination        |

## Technical specification of DURO Macplatinum Board for BWP Grade

Confirming IS 1659 -2004 Amendment No. - 02

**DURO**  
**MACPLATINUM**  
PLYWOOD AND BLOCK BOARDS

| S. No. | Tests prescribed                     | Value for conformity                 | Duro value             |
|--------|--------------------------------------|--------------------------------------|------------------------|
| 1      | Adhesion of Plies (Clause 9.2.2)     | Min. Pass Standard                   | Excellent bonding      |
| 2      | Moisture Content %                   | 5% - 15 %                            | 8.75%                  |
| 3      | Modulus of Elasticity (Clause 9.2.5) | 5000 N/MM <sup>2</sup>               | 5420 N/MM <sup>2</sup> |
| 4      | Modulus of Rapture (Clause 9.2.5)    | 50 N/MM <sup>2</sup>                 | 53 N/MM <sup>2</sup>   |
| 5      | Squareness Test (%) (Clause 7)       | 0.2 (Max)                            | 0.13                   |
| 6      | Edge Straightness (%) (Clause 7)     | 0.2 (Max)                            | 0.09                   |
| 7      | Water Resistance Test (Clause 9.2.2) | No Delamination after 72 hrs boiling | No Delamination        |

## Technical specification of DURO Macprime Ply for MR Grade

Conforming IS : 303 - 1989 Amendment No- 06



| S. No. | Test prescribed                                       | Value for conformity                                                                                      | Duro value             |
|--------|-------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------------|
| 1      | Glue Adhesion (Clause 11.2)                           | Min. Pass Standard                                                                                        | Excellent bonding      |
| 2      | Moisture Content % (Clause 11.3)                      | 5 % - 15 %                                                                                                | 8.55%                  |
| 3      | Static Bending Strength (Clause 11.4)                 |                                                                                                           |                        |
|        | <b>Modulus of Elasticity</b>                          |                                                                                                           |                        |
|        | Along the Grain                                       | 4000 N/MM <sup>2</sup>                                                                                    | 4265 N/MM <sup>2</sup> |
|        | Across the Grain                                      | 2000 N/MM <sup>2</sup>                                                                                    | 2158 N/MM <sup>2</sup> |
|        | <b>Modulus of Rapture</b>                             |                                                                                                           |                        |
|        | Along the Grain                                       | 30 N/MM <sup>2</sup>                                                                                      | 33 N/MM <sup>2</sup>   |
|        | Across the Grain                                      | 15 N/MM <sup>2</sup>                                                                                      | 18 N/MM <sup>2</sup>   |
| 4      | Water Resistance Test (Clause 11.2.1)<br>(Warm water) | No Delamination after 3 hrs<br>In Warm Water at 60°C ± 2°C<br>for 3 Cycle Soaking & Drying same condition | No Delamination        |

## Technical specification of DURO Macprime Board for MR Grade

Conforming IS: 1659 - 2004 Amendment No - 02



| S. No. | Tests prescribed                     | Value for conformity                                                                        | Duro value             |
|--------|--------------------------------------|---------------------------------------------------------------------------------------------|------------------------|
| 1      | Adhesion of Plies (Clause 9.2.2)     | Min. Pass Standard                                                                          | Excellent bonding      |
| 2      | Moisture Content %                   | 5% - 15 %                                                                                   | 8.79%                  |
| 3      | Modulus of Elasticity (Clause 9.2.5) | 4000 N/MM <sup>2</sup>                                                                      | 4120 N/MM <sup>2</sup> |
| 4      | Modulus of Rapture (Clause 9.2.5)    | 40 N/MM <sup>2</sup>                                                                        | 42 N/MM <sup>2</sup>   |
| 5      | Squareness Test (%) (Clause 7)       | 0.2 (Max)                                                                                   | 0.11                   |
| 6      | Edge Straightness (%) (Clause 7)     | 0.2 (Max)                                                                                   | 0.1                    |
| 7      | Water Resistance Test (Clause 9.2.2) | No Delamination after 3 hrs<br>at 60°C ± 2°C<br>for 3 Cycle Soaking & Drying same condition | No Delamination        |



## Technical specification of DURO Techply-Ply for BWP Grade

Accordance IS : 710 – 2010



| S. No. | Tests prescribed                                  | Value for conformity                 | Duro value             |
|--------|---------------------------------------------------|--------------------------------------|------------------------|
| 1      | Moisture Content % (Clause 9.1.1)                 | 5% - 15 %                            | 7.85%                  |
| 2      | Glue Shear Strength (in Dry state) (Clause 9.1.2) | Min. 1100 N/MM <sup>2</sup>          | 1215 N/MM <sup>2</sup> |
|        |                                                   | Avg. 1350 N/MM <sup>2</sup>          | 1420 N/MM <sup>2</sup> |
| 3      | Adhesion of Plies (Clause 9.1.5)                  | Min. Pass Standard                   | Excellent bonding      |
| 4      | Glue Shear Strength (in Wet state) (Clause 9.1.3) | Min. 800 N/MM <sup>2</sup>           | 915 N/MM <sup>2</sup>  |
|        |                                                   | Avg. 1000 N/MM <sup>2</sup>          | 1175 N/MM <sup>2</sup> |
| 5      | Tensile Strength                                  |                                      |                        |
|        | Along the Grain                                   | 42 N/MM <sup>2</sup>                 | 47 N/MM <sup>2</sup>   |
|        | Across the Grain                                  | 25 N/MM <sup>2</sup>                 | 36 N/MM <sup>2</sup>   |
|        | Sum of Tensile Strength (a+b)                     | 84.5 N/MM <sup>2</sup>               | 86 N/MM <sup>2</sup>   |
| 6      | Static Bending Strength (Clause 9.1.6 )           |                                      |                        |
|        | <b>Modulus of Elasticity</b>                      |                                      |                        |
|        | Along the Grain                                   | 7500 N/MM <sup>2</sup>               | 7625 N/MM <sup>2</sup> |
|        | Across the Grain                                  | 4000 N/MM <sup>2</sup>               | 4198 N/MM <sup>2</sup> |
|        | <b>Modulus of Rapture</b>                         |                                      |                        |
|        | Along the Grain                                   | 50 N/MM <sup>2</sup>                 | 53 N/MM <sup>2</sup>   |
|        | Across the Grain                                  | 30 N/MM <sup>2</sup>                 | 33 N/MM <sup>2</sup>   |
|        | <b>Water Resistance Test (Clause 9.2.2)</b>       | No Delamination after 72 hrs boiling | No Delamination        |

## Technical specification of DURO Techply-Board for BWP Grade

Confirming IS 1659 -2004 Amendment No. - 02



| S. No. | Tests prescribed                     | Value for conformity                 | Duro value             |
|--------|--------------------------------------|--------------------------------------|------------------------|
| 1      | Adhesion of Plies (Clause 9.2.2)     | Min. Pass Standard                   | Excellent bonding      |
| 2      | Moisture Content %                   | 5% - 15 %                            | 8.75%                  |
| 3      | Modulus of Elasticity (Clause 9.2.5) | 5000 N/MM <sup>2</sup>               | 5420 N/MM <sup>2</sup> |
| 4      | Modulus of Rapture (Clause 9.2.5)    | 50 N/MM <sup>2</sup>                 | 53 N/MM <sup>2</sup>   |
| 5      | Squareness Test (%) (Clause 7)       | 0.2 (Max)                            | 0.13                   |
| 6      | Edge Straightness (%) (Clause 7)     | 0.2 (Max)                            | 0.09                   |
| 7      | Water Resistance Test (Clause 9.2.2) | No Delamination after 72 hrs boiling | No Delamination        |

## Technical specification of DURO Plus Ply for MR Grade

Conforming IS : 303 - 1989 Amendment No- 06



| S. No. | Test prescribed                                       | Value for conformity                                                                                       | Duro value             |
|--------|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------|
| 1      | Glue Adhesion (Clause 11.2)                           | Min. Pass Standard                                                                                         | Excellent bonding      |
| 2      | Moisture Content % (Clause 11.3)                      | 5 % - 15 %                                                                                                 | 9.85%                  |
| 3      | Static Bending Strength (Clause 11.4)                 |                                                                                                            |                        |
|        | Modulus of Elasticity                                 |                                                                                                            |                        |
|        | Along the Grain                                       | 4000 N/MM <sup>2</sup>                                                                                     | 4525 N/MM <sup>2</sup> |
|        | Across the Grain                                      | 2000 N/MM <sup>2</sup>                                                                                     | 2259 N/MM <sup>2</sup> |
|        | Modulus of Rapture                                    |                                                                                                            |                        |
|        | Along the Grain                                       | 30 N/MM <sup>2</sup>                                                                                       | 35 N/MM <sup>2</sup>   |
|        | Across the Grain                                      | 15 N/MM <sup>2</sup>                                                                                       | 20 N/MM <sup>2</sup>   |
| 4      | Water Resistance Test (Clause 11.2.1)<br>(Warm water) | No Delamination after 3 hrs.<br>In Warm Water at 60°C ± 2°C<br>for 3 Cycle Soaking & Drying same condition | No Delamination        |

## Technical specification of DURO Plus Board for MR Grade

Conforming IS: 1659 - 2004 Amendment No - 02



| S. No. | Tests prescribed                     | Value for conformity                                                                        | Duro value             |
|--------|--------------------------------------|---------------------------------------------------------------------------------------------|------------------------|
| 1      | Adhesion of Plies (Clause 9.2.2)     | Min. Pass Standard                                                                          | Excellent bonding      |
| 2      | Moisture Content %                   | 5% - 15 %                                                                                   | 8.79%                  |
| 3      | Modulus of Elasticity (Clause 9.2.5) | 4000 N/MM <sup>2</sup>                                                                      | 4120 N/MM <sup>2</sup> |
| 4      | Modulus of Rapture (Clause 9.2.5)    | 40 N/MM <sup>2</sup>                                                                        | 43 N/MM <sup>2</sup>   |
| 5      | Squareness Test (%) (Clause 7)       | 0.2 (Max)                                                                                   | 0.12                   |
| 6      | Edge Straightness (%) (Clause 7)     | 0.2 (Max)                                                                                   | 0.1                    |
| 7      | Water Resistance Test (Clause 9.2.2) | No Delamination after 3 hrs<br>at 60°C ± 2°C<br>for 3 Cycle Soaking & Drying same condition | No Delamination        |

## Technical specification of DURO Plus Ply for BWP Grade

Accordance IS : 710 – 2010



| S. No. | Tests prescribed                                  | Value for conformity                 | Duro value             |
|--------|---------------------------------------------------|--------------------------------------|------------------------|
| 1      | Moisture Content % (Clause 9.1.1)                 | 5% - 15 %                            | 7.85%                  |
| 2      | Glue Shear Strength (in Dry state) (Clause 9.1.2) | Min. 1100 N/MM <sup>2</sup>          | 1220 N/MM <sup>2</sup> |
|        |                                                   | Avg. 1350 N/MM <sup>2</sup>          | 1450 N/MM <sup>2</sup> |
| 3      | Adhesion of Plies (Clause 9.1.5)                  | Min. Pass Standard                   | Excellent bonding      |
| 4      | Glue Shear Strength (in Wet state) (Clause 9.1.3) | Min. 800 N/MM <sup>2</sup>           | 922 N/MM <sup>2</sup>  |
|        |                                                   | Avg. 1000 N/MM <sup>2</sup>          | 1175 N/MM <sup>2</sup> |
| 5      | Tensile Strength                                  |                                      |                        |
|        | Along the Grain                                   | 42 N/MM <sup>2</sup>                 | 49 N/MM <sup>2</sup>   |
|        | Across the Grain                                  | 25 N/MM <sup>2</sup>                 | 38 N/MM <sup>2</sup>   |
|        | Sum of Tensile Strength (a+b)                     | 84.5 N/MM <sup>2</sup>               | 87 N/MM <sup>2</sup>   |
| 6      | Static Bending Strength (Clause 9.1.6)            |                                      |                        |
|        | <b>Modulus of Elasticity</b>                      |                                      |                        |
|        | Along the Grain                                   | 7500 N/MM <sup>2</sup>               | 7685 N/MM <sup>2</sup> |
|        | Across the Grain                                  | 4000 N/MM <sup>2</sup>               | 4252 N/MM <sup>2</sup> |
|        | <b>Modulus of Rapture</b>                         |                                      |                        |
|        | Along the Grain                                   | 50 N/MM <sup>2</sup>                 | 55 N/MM <sup>2</sup>   |
|        | Across the Grain                                  | 30 N/MM <sup>2</sup>                 | 34 N/MM <sup>2</sup>   |
|        | <b>Water Resistance Test (Clause 9.2.2)</b>       | No Delamination after 72 hrs boiling | No Delamination        |

## Technical specification of DURO Plus Board for BWP Grade

Conforming IS: 1659 - 2004 Amendment No - 02



| S. No. | Tests prescribed                     | Value for conformity                 | Duro value             |
|--------|--------------------------------------|--------------------------------------|------------------------|
| 1      | Adhesion of Plies (Clause 9.2.2)     | Min. Pass Standard                   | Excellent bonding      |
| 2      | Moisture Content %                   | 5% - 15 %                            | 8.70%                  |
| 3      | Modulus of Elasticity (Clause 9.2.5) | 5000 N/MM <sup>2</sup>               | 5420 N/MM <sup>2</sup> |
| 4      | Modulus of Rapture (Clause 9.2.5)    | 50 N/MM <sup>2</sup>                 | 53 N/MM <sup>2</sup>   |
| 5      | Squareness Test (%) (Clause 7)       | 0.2 (Max)                            | 0.12                   |
| 6      | Edge Straightness (%) (Clause 7)     | 0.2 (Max)                            | 0.09                   |
| 7      | Water Resistance Test (Clause 9.2.2) | No Delamination after 72 hrs boiling | No Delamination        |



## Technical specification of Tower Ply for BWP Grade

Accordance IS : 710 – 2010



| S. No. | Tests prescribed                                  | Value for conformity                 | Duro value             |
|--------|---------------------------------------------------|--------------------------------------|------------------------|
| 1      | Moisture Content % (Clause 9.1.1)                 | 5% - 15 %                            | 7.45%                  |
| 2      | Glue Shear Strength (in Dry state) (Clause 9.1.2) | Min. 1100 N/MM <sup>2</sup>          | 1200 N/MM <sup>2</sup> |
|        |                                                   | Avg. 1350 N/MM <sup>2</sup>          | 1400 N/MM <sup>2</sup> |
| 3      | Adhesion of Plies (Clause 9.1.5)                  | Min. Pass Standard                   | Excellent Bonding      |
| 4      | Glue Shear Strength (in Wet state) (Clause 9.1.3) | Min. 800 N/MM <sup>2</sup>           | 902 N/MM <sup>2</sup>  |
|        |                                                   | Avg. 1000 N/MM <sup>2</sup>          | 1101 N/MM <sup>2</sup> |
| 5      | Tensile Strength                                  |                                      |                        |
|        | Along the Grain                                   | 42 N/MM <sup>2</sup>                 | 45 N/MM <sup>2</sup>   |
|        | Across the Grain                                  | 25 N/MM <sup>2</sup>                 | 32 N/MM <sup>2</sup>   |
|        | Sum of Tensile Strength (a+b)                     | 84.5 N/MM <sup>2</sup>               | 85 N/MM <sup>2</sup>   |
| 6      | Static Bending Strength (Clause 9.1.6)            |                                      |                        |
|        | <b>Modulus of Elasticity</b>                      |                                      |                        |
|        | Along the Grain                                   | 7500 N/MM <sup>2</sup>               | 7605 N/MM <sup>2</sup> |
|        | Across the Grain                                  | 4000 N/MM <sup>2</sup>               | 4122 N/MM <sup>2</sup> |
|        | <b>Modulus of Rapture</b>                         |                                      |                        |
|        | Along the Grain                                   | 50 N/MM <sup>2</sup>                 | 51 N/MM <sup>2</sup>   |
|        | Across the Grain                                  | 30 N/MM <sup>2</sup>                 | 32 N/MM <sup>2</sup>   |
|        | <b>Water Resistance Test (Clause 9.2.2)</b>       | No Delamination after 72 hrs boiling | No Delamination        |

## Technical specification of Tower Board for BWP Grade

Conforming IS: 1659 - 2004 Amendment No - 02



| S. No. | Tests prescribed                     | Value for conformity                 | Duro value             |
|--------|--------------------------------------|--------------------------------------|------------------------|
| 1      | Adhesion of Plies (Clause 9.2.2)     | Min. Pass Standard                   | Excellent Bonding      |
| 2      | Moisture Content %                   | 5% - 15 %                            | 8.71%                  |
| 3      | Modulus of Elasticity (Clause 9.2.5) | 5000 N/MM <sup>2</sup>               | 5120 N/MM <sup>2</sup> |
| 4      | Modulus of Rapture (Clause 9.2.5)    | 50 N/MM <sup>2</sup>                 | 52 N/MM <sup>2</sup>   |
| 5      | Squareness Test (%) (Clause 7)       | 0.2 (Max)                            | 0.11                   |
| 6      | Edge Straightness (%) (Clause 7)     | 0.2 (Max)                            | 0.1                    |
| 7      | Water Resistance Test (Clause 9.2.2) | No Delamination after 72 hrs boiling | No Delamination        |

## Technical specification of Tower Ply for MR Grade

Conforming IS: 303 - 1989 Amendment No - 06



| S. No. | Test prescribed                                       | Value for conformity                                                                                      | Duro value             |
|--------|-------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------------|
| 1      | Glue Adhesion (Clause 11.2)                           | Min. Pass Standard                                                                                        | Excellent Bonding      |
| 2      | Moisture Content % (Clause 11.3)                      | 5 % - 15 %                                                                                                | 8.51%                  |
| 3      | Static Bending Strength (Clause 11.4)                 |                                                                                                           |                        |
|        | <b>Modulus of Elasticity</b>                          |                                                                                                           |                        |
|        | Along the Grain                                       | 4000 N/MM <sup>2</sup>                                                                                    | 4225 N/MM <sup>2</sup> |
|        | Across the Grain                                      | 2000 N/MM <sup>2</sup>                                                                                    | 34 N/MM <sup>2</sup>   |
|        | <b>Modulus of Rapture</b>                             |                                                                                                           |                        |
|        | Along the Grain                                       | 30 N/MM <sup>2</sup>                                                                                      | 31 N/MM <sup>2</sup>   |
|        | Across the Grain                                      | 15 N/MM <sup>2</sup>                                                                                      | 17 N/MM <sup>2</sup>   |
| 4      | Water Resistance Test (Clause 11.2.1)<br>(Warm water) | No Delamination after 3 hrs<br>In Warm Water at 60°C ± 2°C<br>for 3 Cycle Soaking & Drying same condition | No Delamination        |

## Technical specification of Tower Board for MR Grade

Conforming IS: 1659 - 2004 Amendment No - 02



| S. No. | Tests prescribed                     | Value for conformity                                                                        | Duro value             |
|--------|--------------------------------------|---------------------------------------------------------------------------------------------|------------------------|
| 1      | Adhesion of Plies (Clause 9.2.2)     | Min. Pass Standard                                                                          | Excellent Bonding      |
| 2      | Moisture Content %                   | 5% - 15 %                                                                                   | 8.72%                  |
| 3      | Modulus of Elasticity (Clause 9.2.5) | 4000 N/MM <sup>2</sup>                                                                      | 4111 N/MM <sup>2</sup> |
| 4      | Modulus of Rapture (Clause 9.2.5)    | 40 N/MM <sup>2</sup>                                                                        | 42 N/MM <sup>2</sup>   |
| 5      | Squareness Test (%) (Clause 7)       | 0.2 (Max)                                                                                   | 0.11                   |
| 6      | Edge Straightness (%) (Clause 7)     | 0.2 (Max)                                                                                   | 0.1                    |
| 7      | Water Resistance Test (Clause 9.2.2) | No Delamination after 3 hrs<br>at 60°C ± 2°C<br>for 3 Cycle Soaking & Drying same condition | No Delamination        |

## Technical specification of Tower Platinum - Board for BWP Grade

Conforming IS: 1659 - 2004 Amendment No - 02



| S. No. | Tests prescribed                     | Value for conformity                 | Duro value             |
|--------|--------------------------------------|--------------------------------------|------------------------|
| 1      | Adhesion of Plies (Clause 9.2.2)     | Min. Pass Standard                   | Excellent bonding      |
| 2      | Moisture Content %                   | 5% - 15 %                            | 8.72%                  |
| 3      | Modulus of Elasticity (Clause 9.2.5) | 4000 N/MM <sup>2</sup>               | 5120 N/MM <sup>2</sup> |
| 4      | Modulus of Rapture (Clause 9.2.5)    | 40 N/MM <sup>2</sup>                 | 52 N/MM <sup>2</sup>   |
| 5      | Squareness Test (%) (Clause 7)       | 0.2 (Max)                            | 0.13                   |
| 6      | Edge Straightness (%) (Clause 7)     | 0.2 (Max)                            | 0.1                    |
| 7      | Water Resistance Test (Clause 9.2.2) | No Delamination after 72 hrs boiling | No Delamination        |

## Technical specification of Tower Platinum - Ply for BWP Grade

Accordance IS : 710 – 2010



| S. No. | Tests prescribed                                  | Value for conformity                 | Duro value             |
|--------|---------------------------------------------------|--------------------------------------|------------------------|
| 1      | Moisture Content % (Clause 9.1.1)                 | 5% - 15 %                            | 7.45%                  |
| 2      | Glue Shear Strength (in Dry state) (Clause 9.1.2) | Min. 1100 N/MM <sup>2</sup>          | 1215 N/MM <sup>2</sup> |
|        |                                                   | Avg. 1350 N/MM <sup>2</sup>          | 1410 N/MM <sup>2</sup> |
| 3      | Adhesion of Plies (Clause 9.1.5)                  | Min. Pass Standard                   | Excellent Bonding      |
| 4      | Glue Shear Strength (in Wet state) (Clause 9.1.3) | Min. 800 N/MM <sup>2</sup>           | 905 N/MM <sup>2</sup>  |
|        |                                                   | Avg. 1000 N/MM <sup>2</sup>          | 1115 N/MM <sup>2</sup> |
| 5      | Tensile Strength                                  |                                      |                        |
|        | Along the Grain                                   | 42 N/MM <sup>2</sup>                 | 46 N/MM <sup>2</sup>   |
|        | Across the Grain                                  | 25 N/MM <sup>2</sup>                 | 34 N/MM <sup>2</sup>   |
|        | Sum of Tensile Strength (a+b)                     | 84.5 N/MM <sup>2</sup>               | 86 N/MM <sup>2</sup>   |
| 6      | Static Bending Strength (Clause 9.1.6)            |                                      |                        |
|        | <b>Modulus of Elasticity</b>                      |                                      |                        |
|        | Along the Grain                                   | 7500 N/MM <sup>2</sup>               | 7610 N/MM <sup>2</sup> |
|        | Across the Grain                                  | 4000 N/MM <sup>2</sup>               | 4152 N/MM <sup>2</sup> |
|        | <b>Modulus of Rapture</b>                         |                                      |                        |
|        | Along the Grain                                   | 50 N/MM <sup>2</sup>                 | 53 N/MM <sup>2</sup>   |
|        | Across the Grain                                  | 30 N/MM <sup>2</sup>                 | 33 N/MM <sup>2</sup>   |
|        | <b>Water Resistance Test (Clause 9.2.2)</b>       | No Delamination after 72 hrs boiling | No Delamination        |

## Technical specification of DURO Nature's Signature for MR Grade

Conforming IS: 1328 - 1996



| S. No. | Tests prescribed                       | Value for conformity                                                                                                                                                                 | Duro value                   |
|--------|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|
| 1      | Dimension, mm (Cl. 8.1.2.5)            |                                                                                                                                                                                      |                              |
|        | (I) Length                             | +6,-0mm                                                                                                                                                                              | 2443                         |
|        | (II) Width                             | 3-0                                                                                                                                                                                  | 1222                         |
|        | (III) Thickness                        | (+/- 10 %)                                                                                                                                                                           | 3.91 to 4.03                 |
| 2      | Workmanship & finish (Cl.9.1& 9.2)     |                                                                                                                                                                                      |                              |
|        | a) Uniformity of thickness             | The plywood board shall be of Uniform thickness within Tolerance limits.                                                                                                             | Satisfactory                 |
|        | b) Smoothness of plywood board         | The face of plywood board shall be of reasonable smooth.                                                                                                                             | Satisfactory                 |
|        | c) Thickness of face veneer            | Decorative Veneer thickness tolerance not less then 0.30 mm & not more then 1 mm                                                                                                     | 0.6 MM                       |
| 3      | Squareness & Edge Straightness         |                                                                                                                                                                                      |                              |
|        | a) Squareness % (Cl. 8.3)              | 0.20 %                                                                                                                                                                               | 0.06 to 0.08%                |
|        | b) Edge Straightness %                 | 0.20 %                                                                                                                                                                               | 0.09 to 0.11%                |
| 4      | Type of Glue used                      | Urea, Melamine, Formaldehyde                                                                                                                                                         | Urea, Melamine, Formaldehyde |
| 5      | Moisture Contents % (Cl. 11.3)         | 5-15%                                                                                                                                                                                | 6 – 8 %                      |
| 6      | Water Resistance Test % (Cl. 11.1.2.1) | Sample kept in Warm Water at 60°C ±2°C temperature for 3 hrs and 8 hrs drying at 65°C ±2°C temperature and more two cycle sample does not delamination any core / face delamination. | No Delamination found        |

## Technical specification of DURO Teak for MR Grade

Conforming IS: 1328 - 1996



| S. No. | Tests prescribed                       | Value for conformity                                                                                                                                                                 | Duro value                   |
|--------|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|
| 1      | Dimension, mm (Cl. 8.1.2.5)            |                                                                                                                                                                                      |                              |
|        | (I) Length                             | +6,-0mm                                                                                                                                                                              | 2443                         |
|        | (II) Width                             | 3-0                                                                                                                                                                                  | 1222                         |
|        | (III) Thickness                        | (+/- 10 %)                                                                                                                                                                           | 3.91 to 4.03                 |
| 2      | Workmanship & finish (Cl.9.1& 9.2)     |                                                                                                                                                                                      |                              |
|        | a) Uniformity of thickness             | The plywood board shall be of Uniform thickness within Tolerance limits.                                                                                                             | Satisfactory                 |
|        | b) Smoothness of plywood board         | The face of plywood board shall be of reasonable smooth.                                                                                                                             | Satisfactory                 |
|        | c) Thickness of face veneer            | Decorative Veneer thickness tolerance not less then 0.30 mm & not more then 1 mm                                                                                                     | 0.6 MM                       |
| 3      | Squareness & Edge Straightness         |                                                                                                                                                                                      |                              |
|        | a) Squareness % (Cl. 8.3)              | 0.20 %                                                                                                                                                                               | 0.06 to 0.08%                |
|        | b) Edge Straightness %                 | 0.20 %                                                                                                                                                                               | 0.09 to 0.11%                |
| 4      | Type of Glue used                      | Urea, Melamine, Formaldehyde                                                                                                                                                         | Urea, Melamine, Formaldehyde |
| 5      | Moisture Contents % (Cl. 11.3)         | 5-15%                                                                                                                                                                                | 6 – 8 %                      |
| 6      | Water Resistance Test % (Cl. 11.1.2.1) | Sample kept in Warm Water at 60°C ±2°C temperature for 3 hrs and 8 hrs drying at 65°C ±2°C temperature and more two cycle sample does not delamination any core / face delamination. | No Delamination found        |



# Technical specification of DURO Flush Door for BWP Grade

Conforming to IS : 2202 (Part 1) - 1999



| S. No. | Tests prescribed                                 | Value for conformity                                                                               | Duro value           |
|--------|--------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------------|
| 1      | End immersion Test (Clause 11.12)                | No delamination                                                                                    | No Delamination      |
| 2      | Glue Adhesion Test (Clause 11.14)                | No Delamination                                                                                    | No Delamination      |
| 3      | Knife Test (Clause 11.13)                        | Min. Pass Standard                                                                                 | Pass Standard        |
| 4      | Impact Indentation Test (11.4)                   | No cracking, tearing or delamination                                                               | Conform              |
|        |                                                  | Depth on indentation not greater than 0.2 mm                                                       | Conform              |
| 5      | Slamming Test (Clause 11.9)                      | No visible damage after 50 drops                                                                   | No Damage            |
| 6      | Buckling (Deflection in mm)<br>(Clause 11.8)     | No Deterioration                                                                                   | No Deterioration     |
|        | After 5 minutes of 40 kgs loading                | Initial deflection not greater than 50 mm                                                          | Conform              |
|        | 15 minutes after load removal                    | Residual deflection after 15 minutes of unloading not greater than 5 mm                            | Conform              |
| 7      | Edge loading (Deflection in mm)<br>(Clause 11.6) | Deflection at max load not greater than 5 mm                                                       | Conform              |
|        | After 15 minutes of 100 kgs loading              | Residual deflection after removal of load not greater than 0.5 mm                                  | Conform              |
|        | 03 minutes after load removal                    | Not more than 2mm during loading                                                                   | No lateral Buckling  |
|        | Lateral buckling                                 | Residual buckling after load removal                                                               | No Residual Buckling |
| 8      | Screw with drawl strength,<br>N (Clause 11.15)   | Not less than 1000                                                                                 | 1850 N               |
|        |                                                  | Surface condition : No visible damage to the surface either by delamination or extra chipping off. | No visible damage    |

# Technical specification of DURO Techply Door for BWP Grade

Conforming to IS : 2202 (Part 1) - 1999



| S. No. | Tests prescribed                                 | Value for conformity                                                                                  | Duro value           |
|--------|--------------------------------------------------|-------------------------------------------------------------------------------------------------------|----------------------|
| 1      | End immersion Test (Clause 11.12)                | No Delamination                                                                                       | No Delamination      |
| 2      | Glue Adhesion Test (Clause 11.14)                | No Delamination                                                                                       | No Delamination      |
| 3      | Knife Test (Clause 11.13)                        | Min. Pass Standard                                                                                    | Pass Standard        |
| 4      | Impact Indentation Test (11.4)                   | No Cracking, tearing or delamination                                                                  | Conform              |
|        |                                                  | Depth on indentation not greater Than 0.2 mm                                                          | Conform              |
| 5      | Slamming Test (Clause 11.9)                      | No Visible damage after 50 drops                                                                      | No Damage            |
| 6      | Buckling (Deflection in mm)<br>(Clause 11.8)     | No Deterioration                                                                                      | No Deterioration     |
|        | After 5 minutes of 40 kgs loading                | Initial deflection not Greater than 50 mm                                                             | Conform              |
|        | 15 minutes after load removal                    | Residual deflection after 15 minutes of<br>Unloading not greater than 5 mm                            | Conform              |
| 7      | Edge loading (Deflection in mm)<br>(Clause 11.6) | Deflection at max load not Greater than 5 mm                                                          | Conform              |
|        | After 15 minutes of 100 kgs<br>loading           | Residual deflection after removal of load<br>not greater than 0.5 mm                                  | Conform              |
|        |                                                  | Not more than 2mm during loading                                                                      | No lateral Buckling  |
|        | 03 minutes after load removal                    | Residual buckling after load removal                                                                  | No Residual Buckling |
| 8      | Lateral buckling                                 | Not less than 1000                                                                                    | 1850 N               |
|        | Screw with drawl strength,<br>N (Clause 11.15)   | Surface condition : No visible damage to the<br>surface either by delamination or extra chipping off. | No visible damage    |

# Technical specification of Tower Door for BWP Grade


Conforming to IS : 2202 (Part 1) - 1999



| S. No. | Tests prescribed                                 | Value for conformity                                                                                  | Duro value           |
|--------|--------------------------------------------------|-------------------------------------------------------------------------------------------------------|----------------------|
| 1      | End immersion Test (Clause 11.12)                | No Delamination                                                                                       | No Delamination      |
| 2      | Glue Adhesion Test (Clause 11.14)                | No Delamination                                                                                       | No Delamination      |
| 3      | Knife Test (Clause 11.13)                        | Min. Pass Standard                                                                                    | Pass Standard        |
| 4      | Impact Indentation Test (11.4)                   | No Cracking, tearing or delamination                                                                  | Conform              |
|        |                                                  | Depth on indentation not greater Than 0.2 mm                                                          | Conform              |
| 5      | Slamming Test (Clause 11.9)                      | No Visible damage after 50 drops                                                                      | No Damage            |
| 6      | Buckling (Deflection in mm)<br>(Clause 11.8)     | No Deterioration                                                                                      | No Deterioration     |
|        | After 5 minutes of 40 kgs loading                | Initial deflection not Greater than 50 mm                                                             | Conform              |
|        | 15 minutes after load removal                    | Residual deflection after 15 minutes of<br>Unloading not greater than 5 mm                            | Conform              |
| 7      | Edge loading (Deflection in mm)<br>(Clause 11.6) | Deflection at max load not Greater than 5 mm                                                          | Conform              |
|        | After 15 minutes of 100 kgs<br>loading           | Residual deflection after removal of load<br>not greater than 0.5 mm                                  | Conform              |
|        |                                                  | Not more than 2mm during loading                                                                      | No lateral Buckling  |
|        | 03 minutes after load removal                    | Residual buckling after load removal                                                                  | No Residual Buckling |
| 8      | Lateral buckling                                 | Not less than 1000                                                                                    | 1850 N               |
|        | Screw with drawl strength,<br>N (Clause 11.15)   | Surface condition : No visible damage to the<br>surface either by delamination or extra chipping off. | No visible damage    |





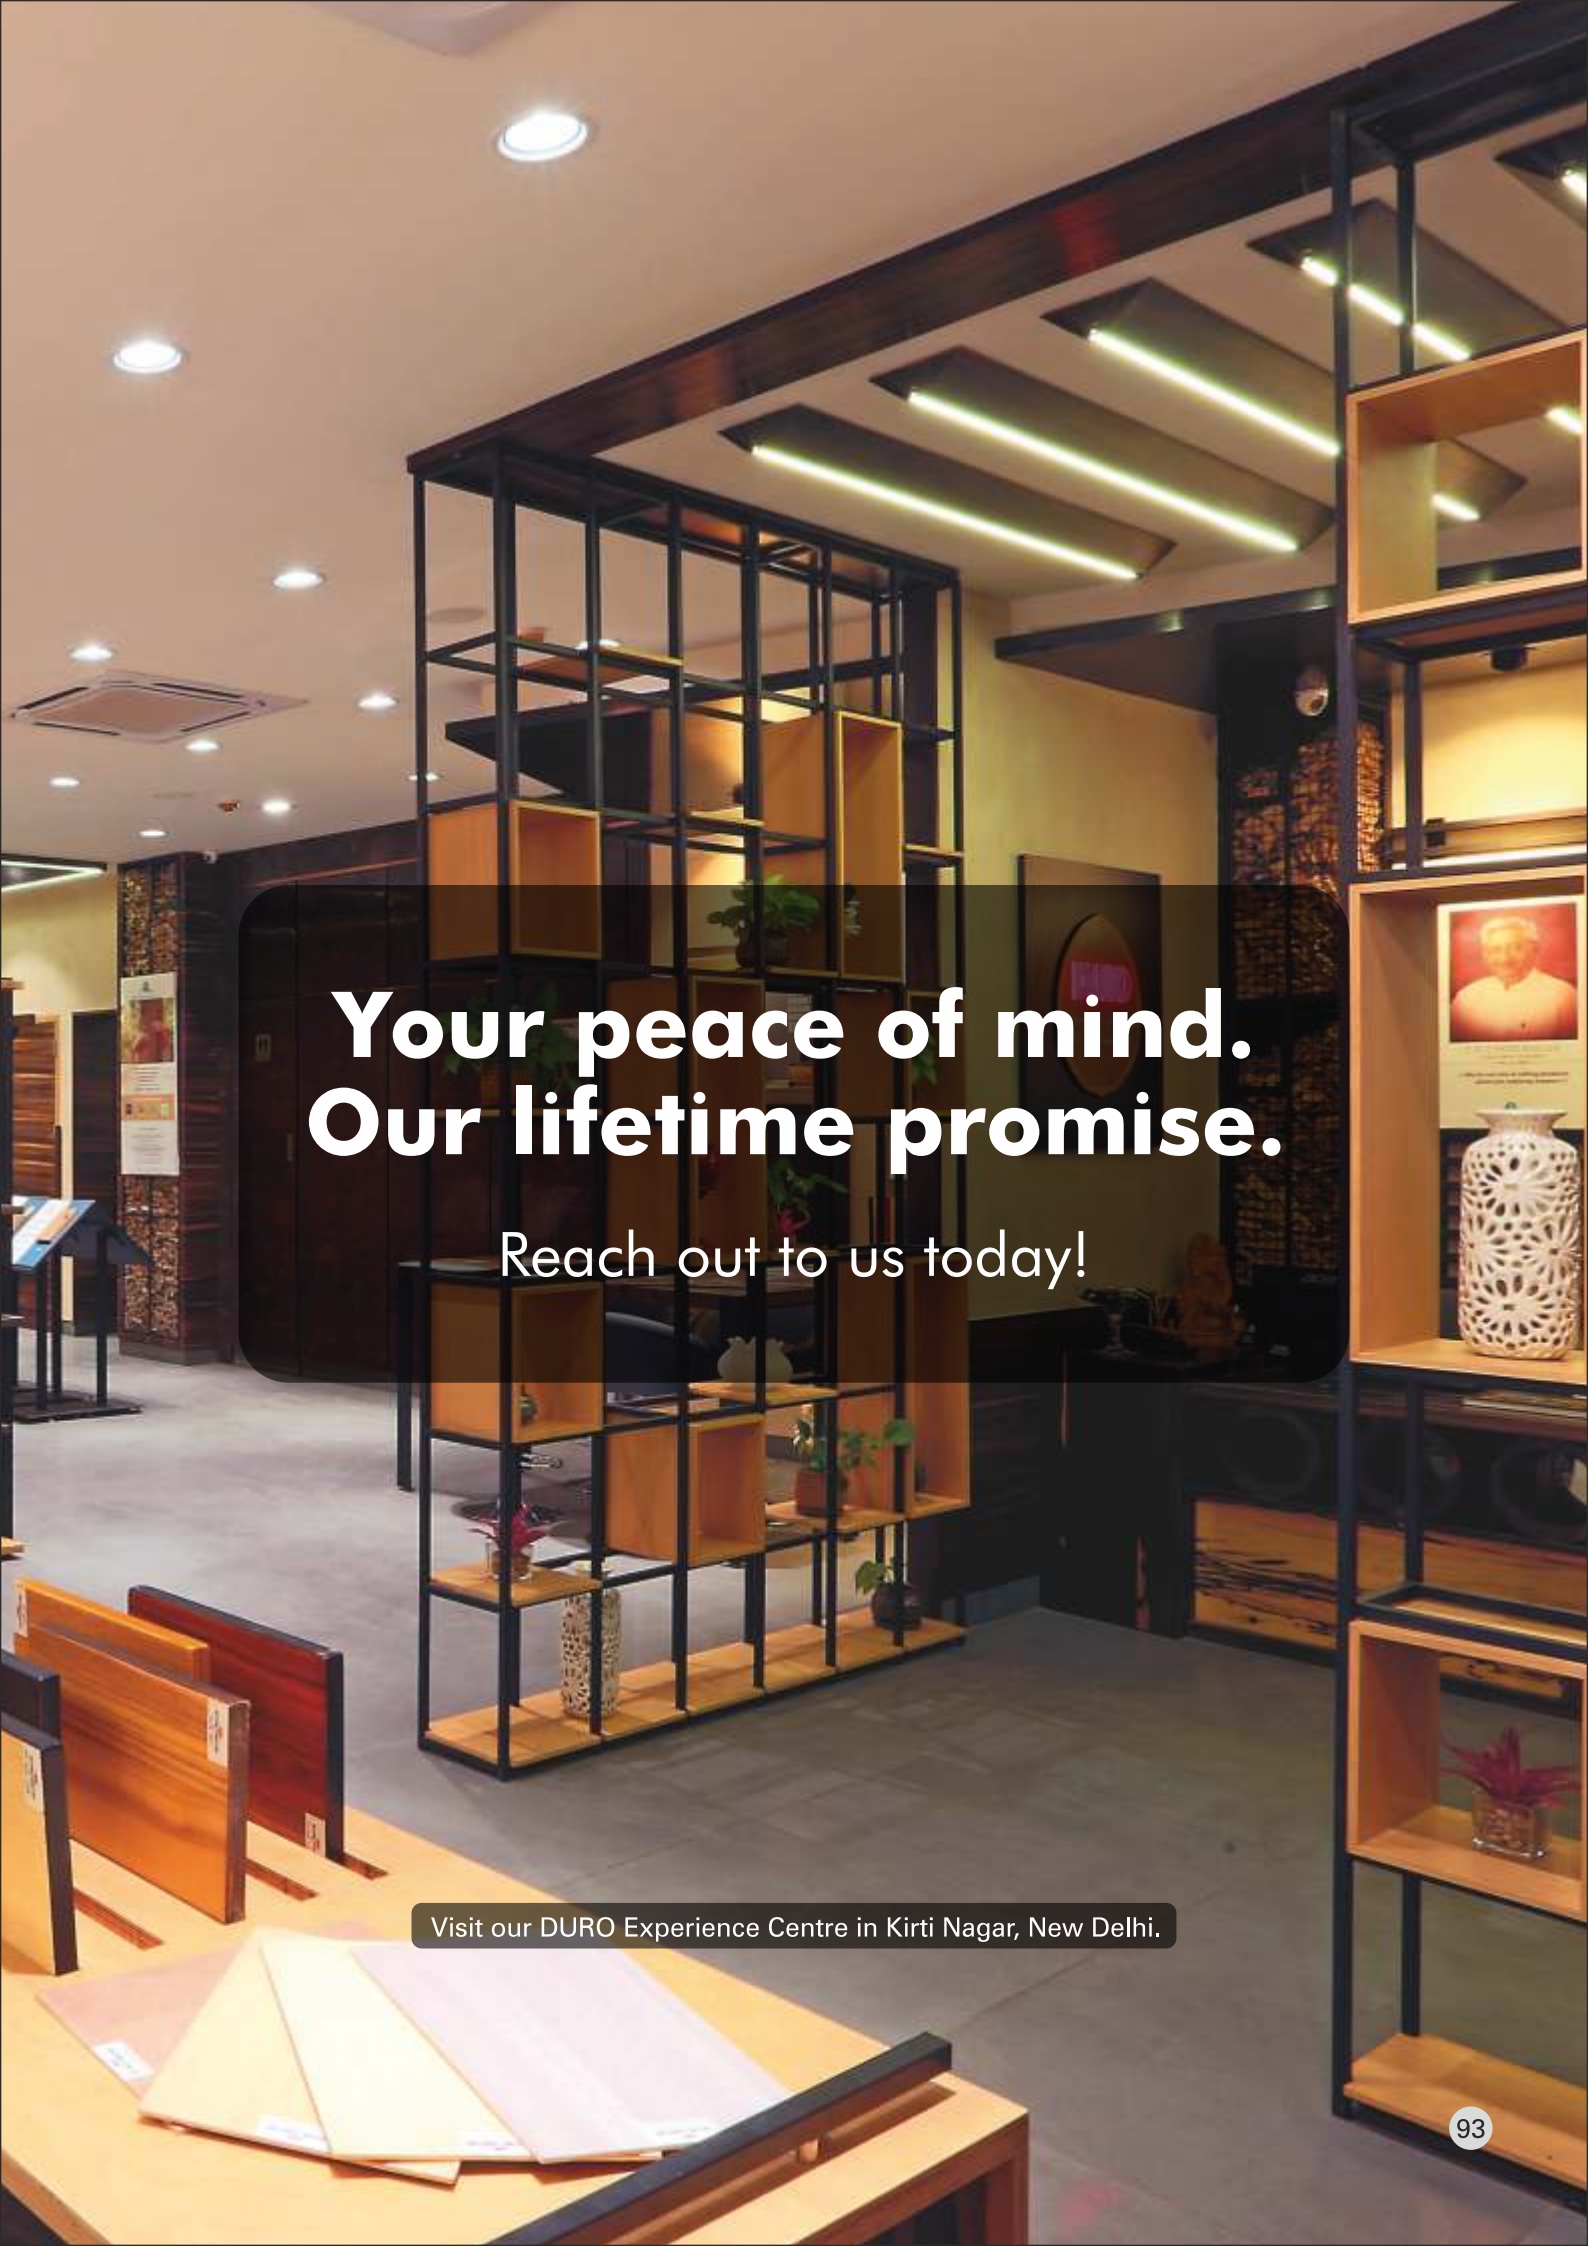

**Your peace of mind.  
Our lifetime promise.**

Reach out to us today!

Visit our DURO Experience Centre in Kirti Nagar, New Delhi.



## Duroply Industries Limited

Head Office: 113 Park Street, North Block 4th Floor, Kolkata-700016

Corporate Office: 1/35, W.H.S. Kirti Nagar, New Delhi - 110015

CIN: L20211WB1957PLC023493 | Toll Free: 1800-345-3876

Email: [enquiry@duroply.com](mailto:enquiry@duroply.com) | Website: [www.duroply.in](http://www.duroply.in)

Find us on :     [duroplyindia](http://duroplyindia)