Features/Benefits

- Normally closed function
- Vertical detect
- Reliable long time compression
- IP54
- Tape & reel
- RoHS compliant and compatible

Typical Applications

- Smart meters
- Alarm systems
- Anti-tamper devices



 \geq 250 Vrms

Specifications	Electrical	GOLD	SILVER
FUNCTION: Momentary action.	MAXIMUM POWER:	0.2 VA	1 VA
CONTACT TYPE: SPST Normally Closed.	MAXIMUM VOLTAGE:	32 VDC	32 VDC
TERMINALS: Gullwing type for SMT.	MINIMUM VOLTAGE:	20 mVDC	20 mVDC
Mechanical	MAXIMUM CURRENT:	10 mA	50 mA
SWITCHING FORCE: ≤ 2 N	MINIMUM CURRENT:	1 μΑ	1 mA
TRAVEL TO BREAK: 0,7 mm	CONTACT RESISTANCE:	≤	≤ 350 mΩ
TOTAL TRAVEL: 1,1 mm	INSULATION RESISTANCE:	>	>1 G Ω

Packaging

Switches are delivered on continuous tape, in reels of 2,000 pieces

Environmental GOLD SILVER

OPERATING TEMPERATURE: -40°C to +125°C -40°C to +85°C STORAGE TEMPERATURE: -55°C to + 125°C -40°C to +85°C


DIELECTRIC STRENGTH:

SOLDERING: Compatible with lead free reflow process

NOTE: Specifications listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Build-A-Switch


To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on the next page. For additional options not shown in catalog, consult Customer Service Center.

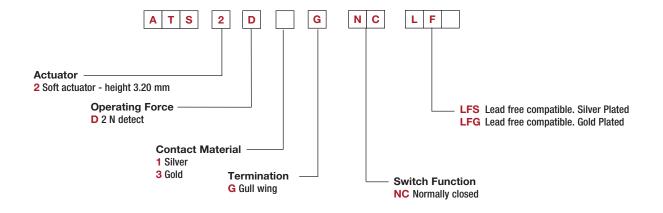

















MARKING	PART NUMBER	
D - 1	ATS 2D1G NC LFS	
D-3	ATS 2D3G NC LFG	










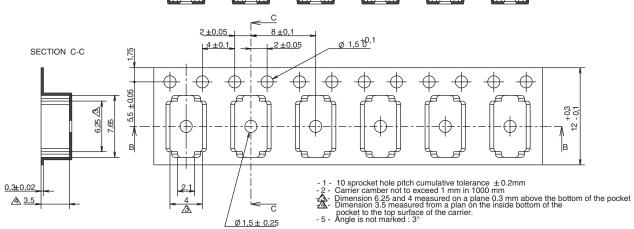

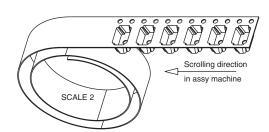



+0,3 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

C&K Switches:

ATS2D1G NC LFS ATS2D3G NC LFG