

INSTALACION DE PE

Virtual Network Editor

×

Name	Type	External Connection	Host Connection	DHCP	Subnet Address
VMnet0	Bridged	Intel(R) Wi-Fi 6 AX201 160MHz	-	-	-
VMnet1	Host-only	-	Connected	Enabled	192.168.40.0
VMnet2	Host-only	-	Connected	-	192.168.10.0
VMnet8	NAT	NAT	Connected	Enabled	192.168.235.0

Add Network...

Remove Network

Rename Network...

VMnet Information

☐ Bridged (connect VMs directly to the external network)

Bridged to: Intel(R) Wi-Fi 6 AX201 160MHz

Automatic Settings...

☐ NAT (shared host's IP address with VMs)

NAT Settings...

☒ Host-only (connect VMs internally in a private network)

☒ Connect a host virtual adapter to this network

Host virtual adapter name: VMware Network Adapter VMnet2

☐ Use local DHCP service to distribute IP address to VMs

DHCP Settings...

Subnet IP: 192 . 168 . 10 . 0

Subnet mask: 255 . 255 . 255 . 0

Restore Defaults

Import...


Export...



OK



Cancel


Apply



Help


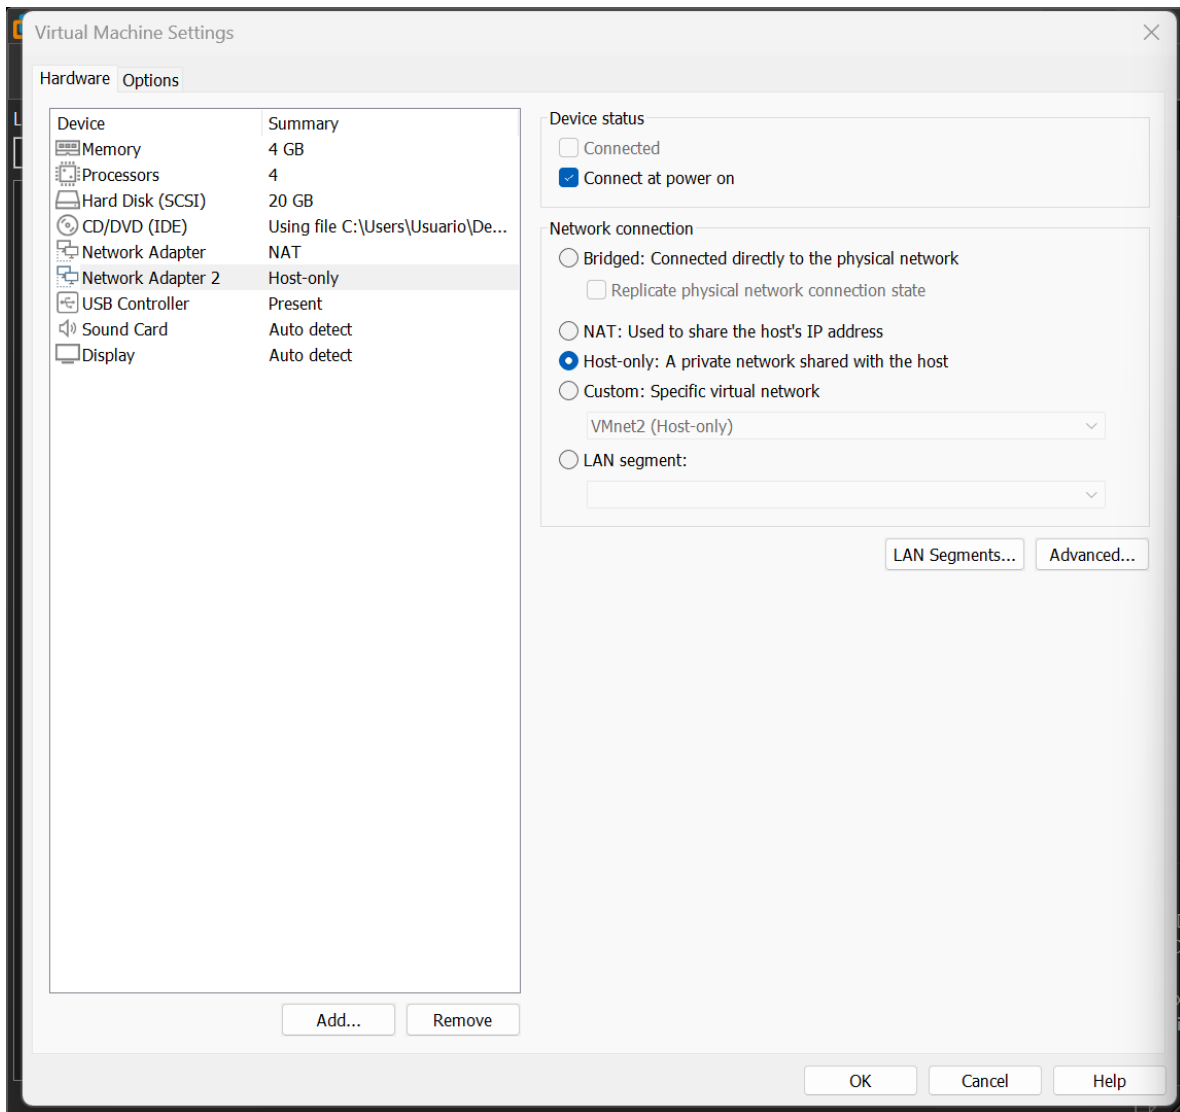


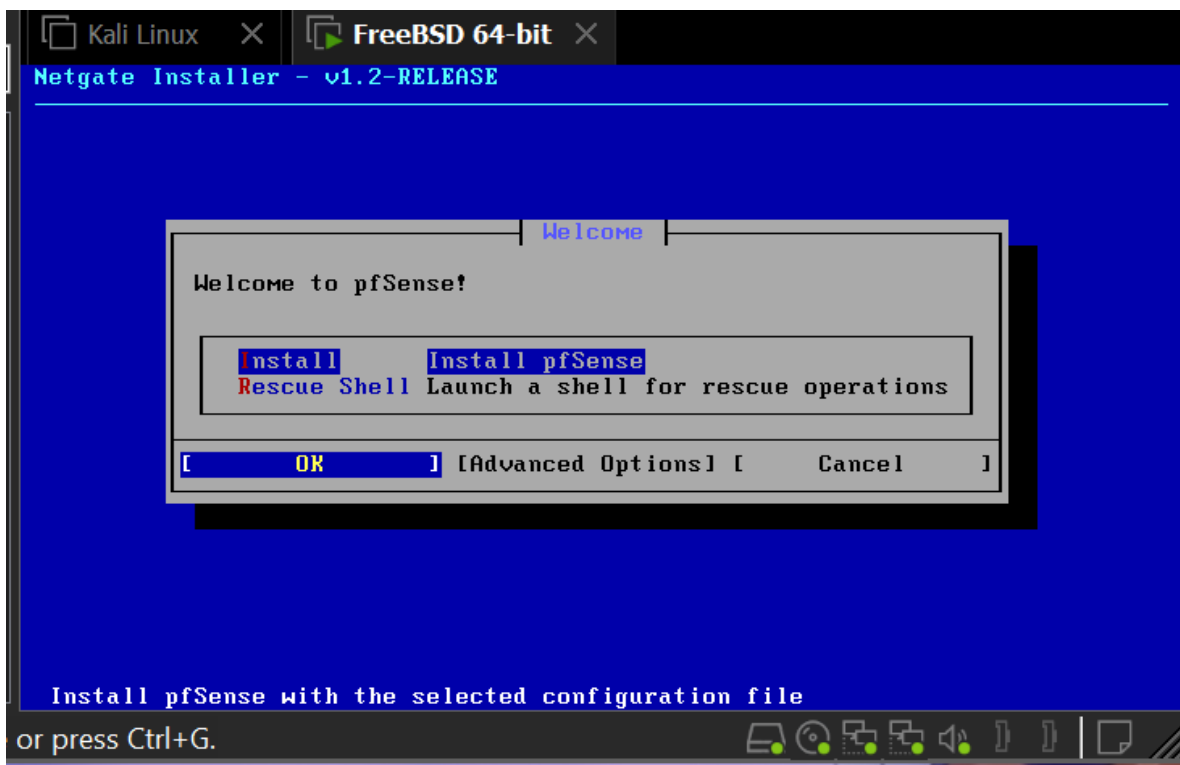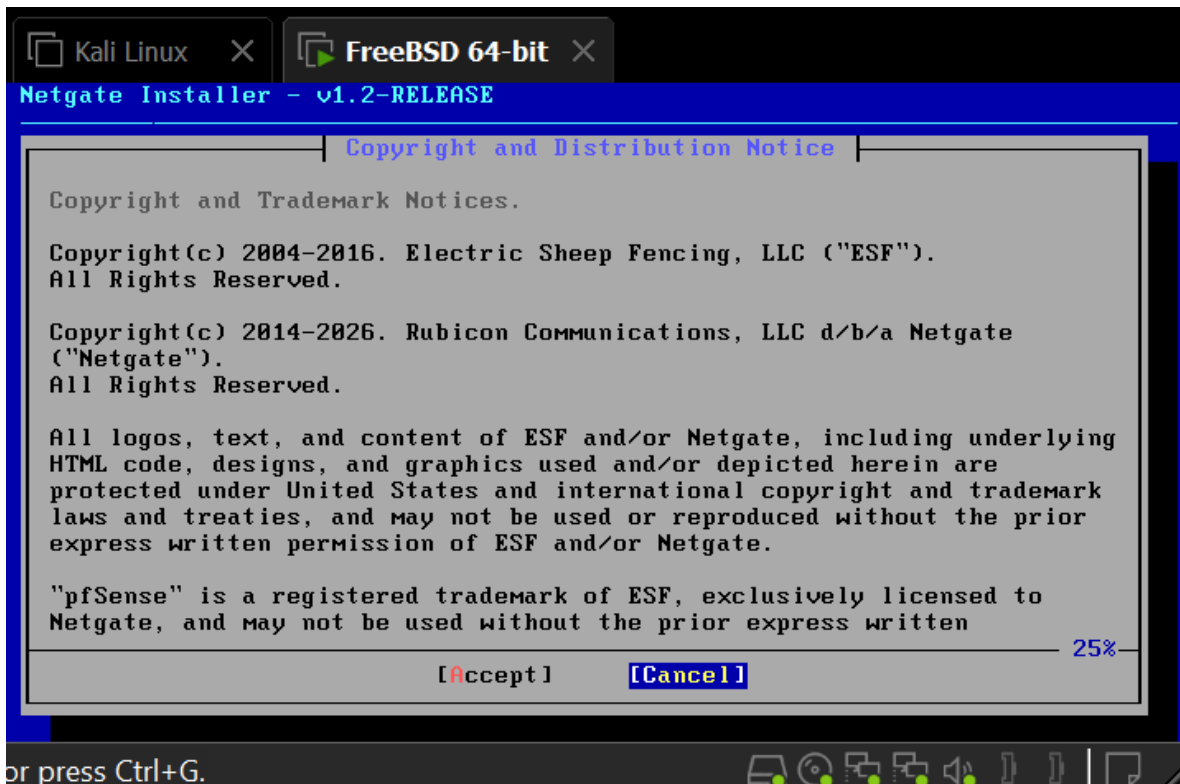

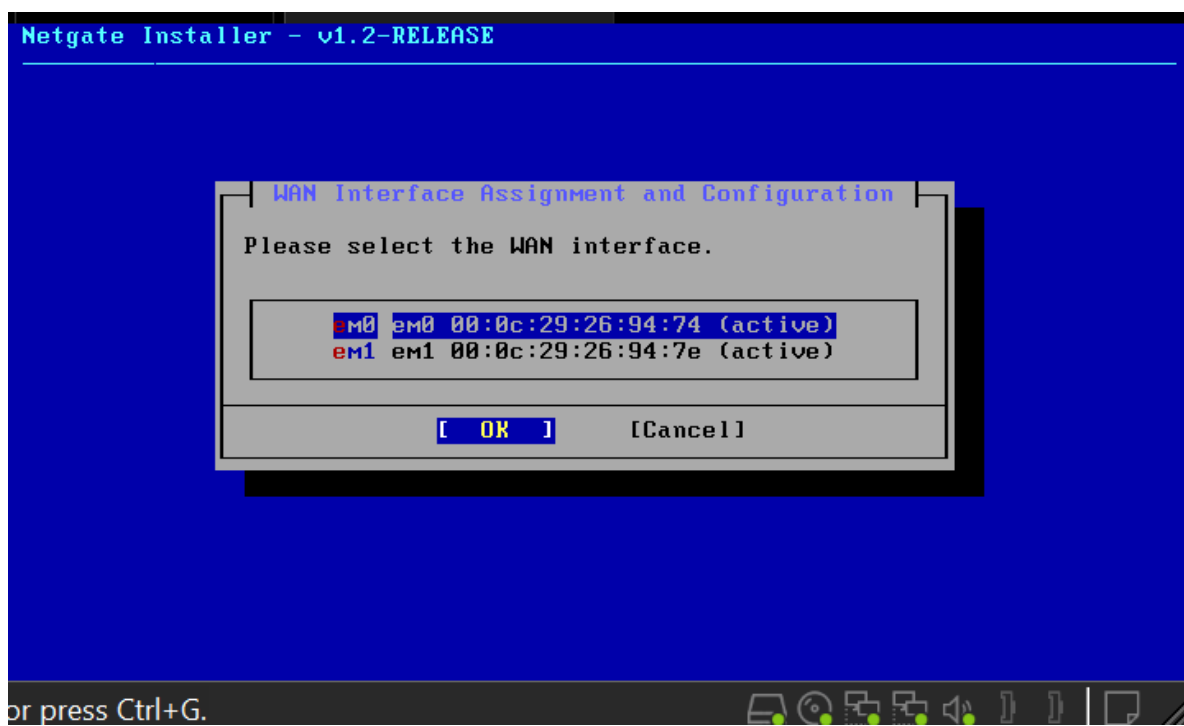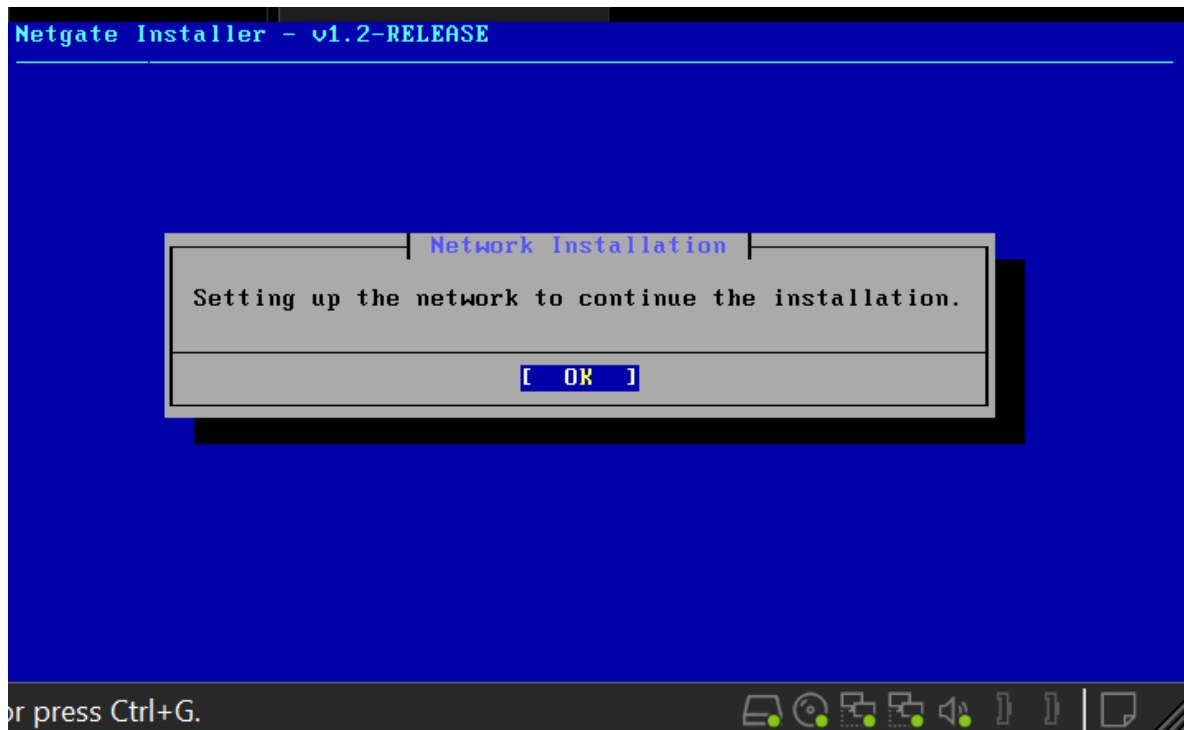

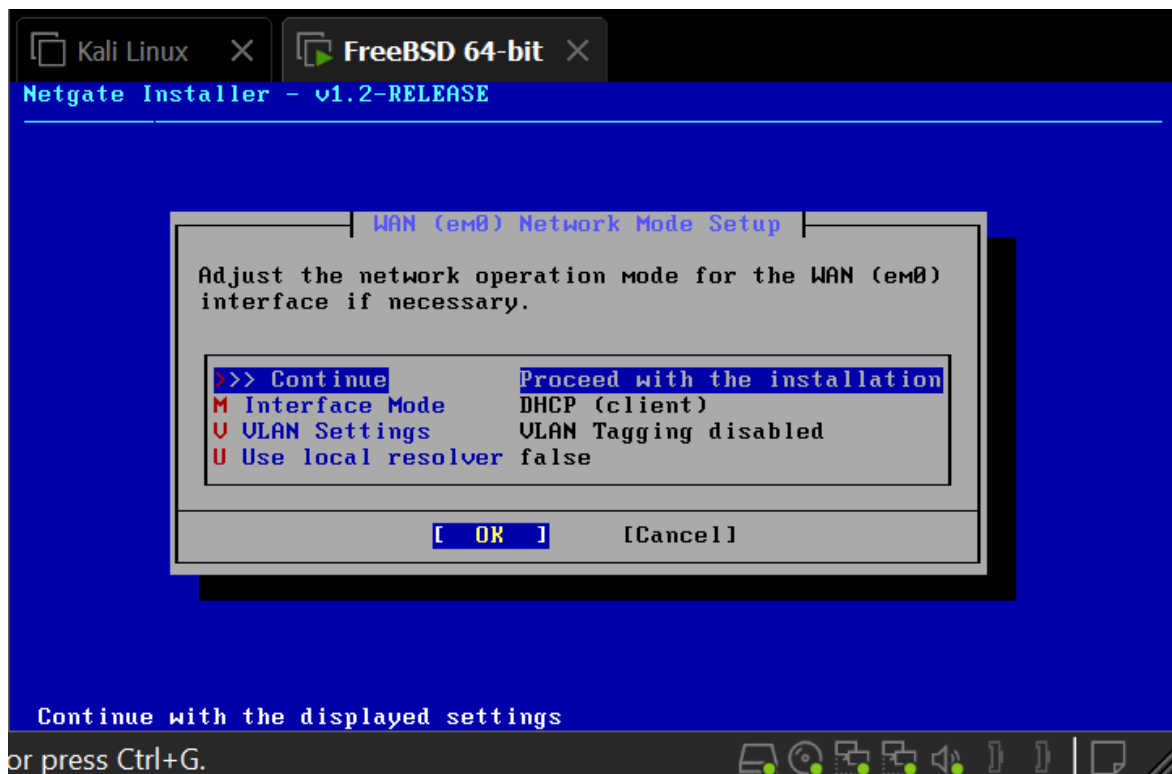

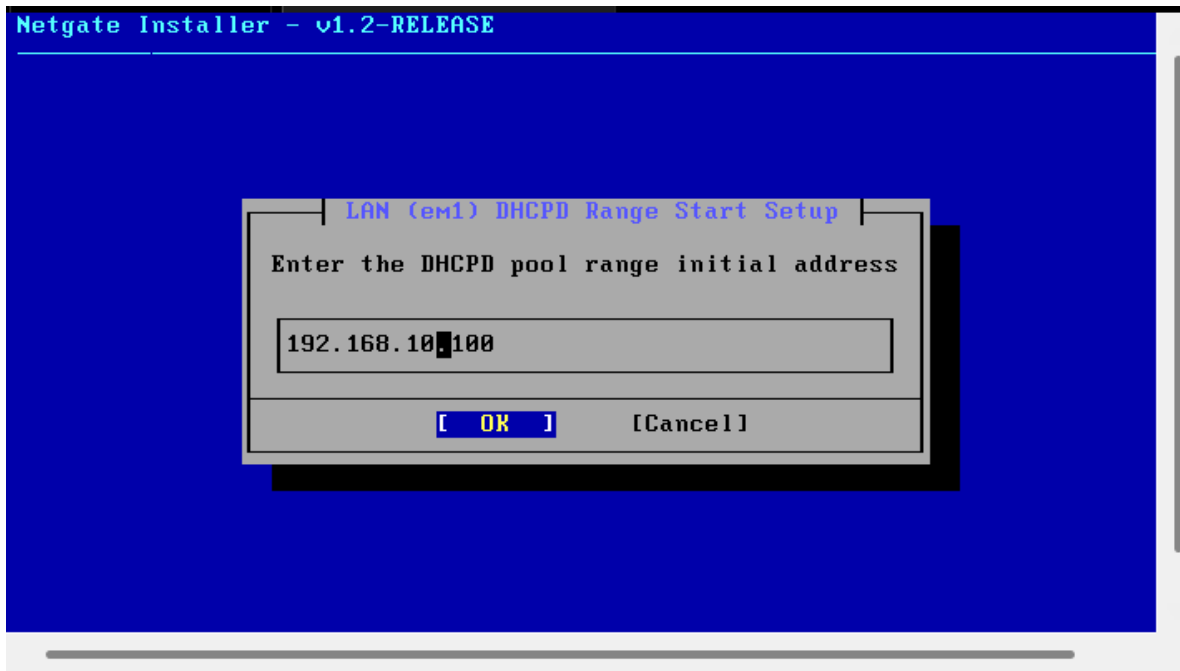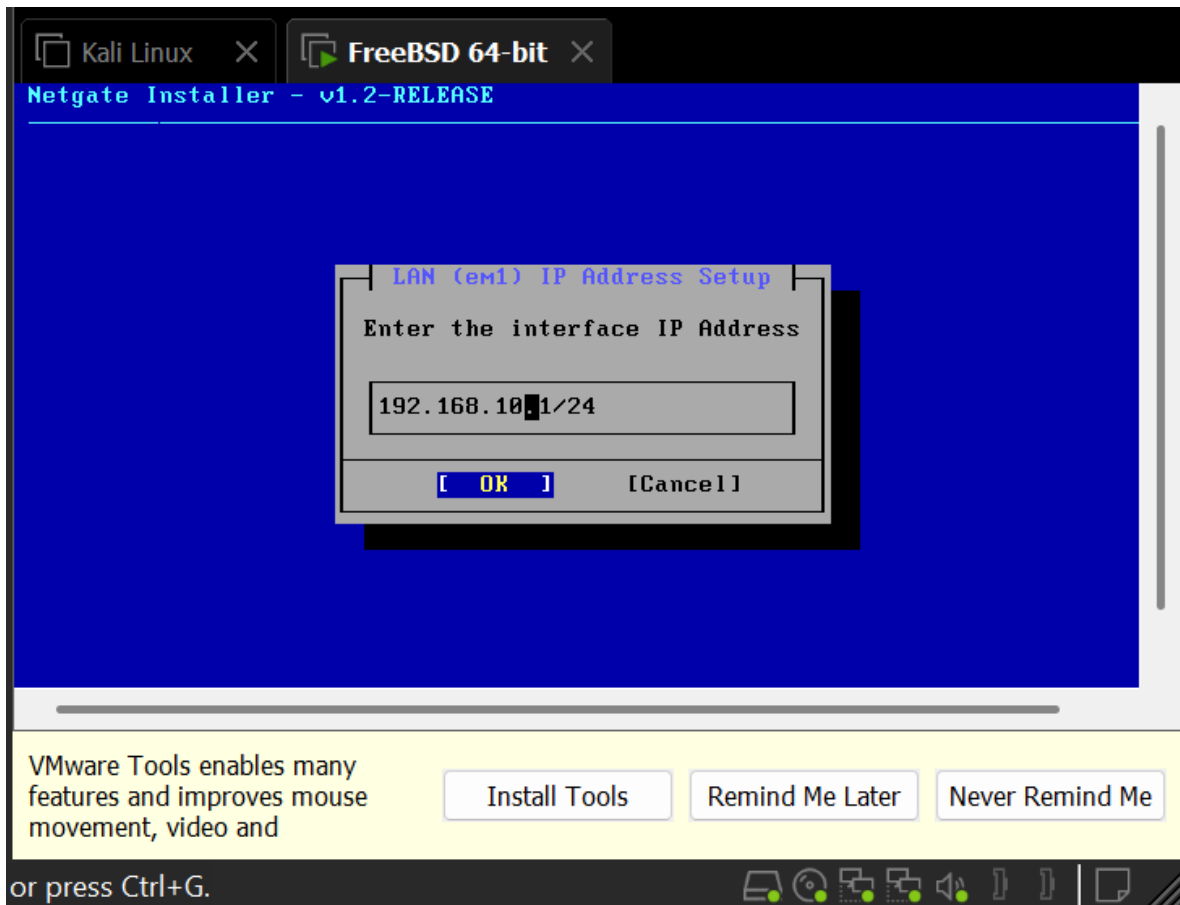

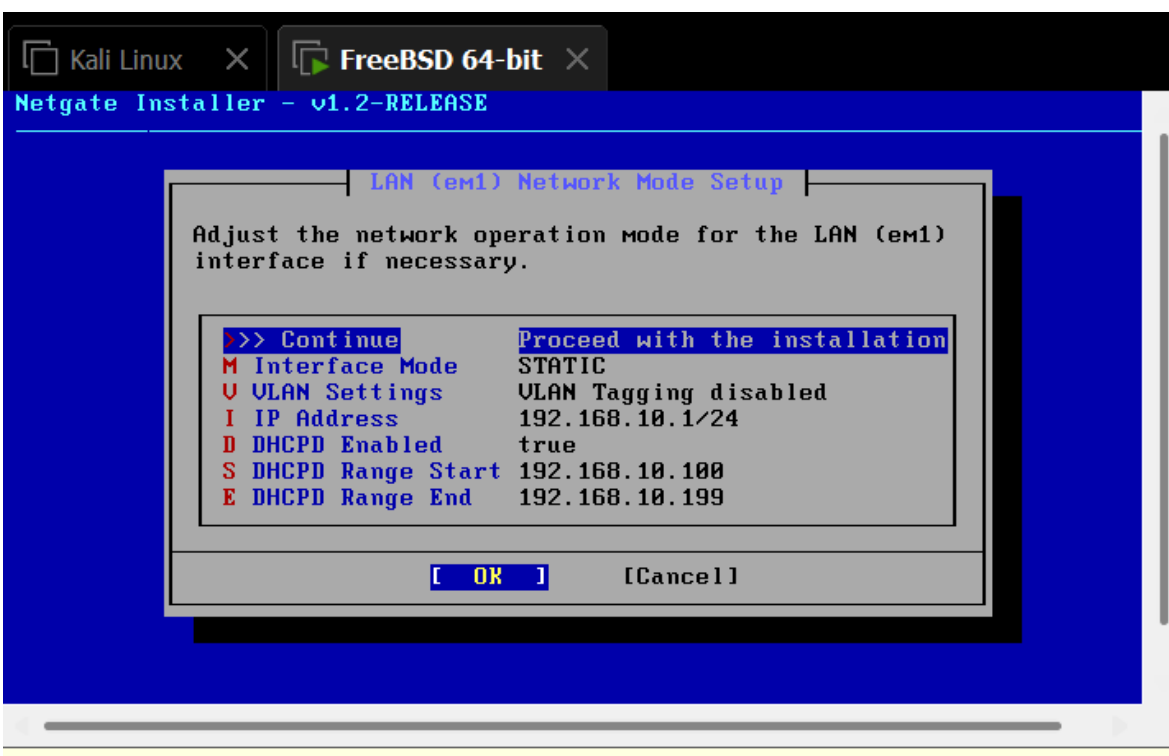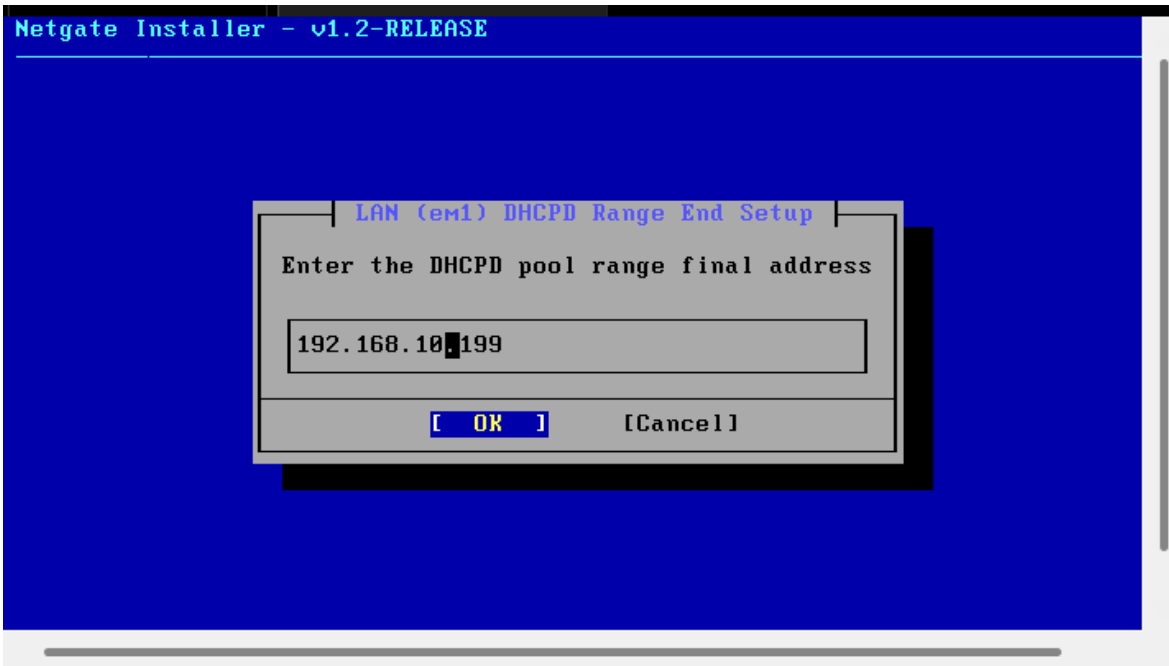

Netgate Installer - v1.2-RELEASE

Interface Assignment and Configuration

Detected: VMware Virtual Machine

Please confirm the interface assignment to continue with the installation.

LAN em1 (active)

LAN em0 (active)

[Continue]

[Assign/Configure]

[Cancel]

Netgate Installer - v1.2-RELEASE

Connectivity Check

Verifying the Internet connection...

Trying to reach the Netgate Servers, please wait (this can take a while)...

Netgate Installer - v1.2-RELEASE

Active Subscription Validation

This device does not have an active pfSense Plus subscription.

To purchase pfSense Plus:

Software Store: <https://www.netgate.com/purchase-plus>

NDI: 5226 94ca 151d d562 68c1

and select 'Retry Validation' once purchase is complete.

Or select 'Install CE' to install pfSense CE software.

[Install CE]

[Retry Validation]

[Cancel]

Netgate Installer - v1.2-RELEASE

Installation Options

Please select the File System type and the Partition Scheme.

>>> Continue	Proceed with the installation
F File System	ZFS (recommended default)
P Partition Scheme	GPT (compatible with MBR)

[OK]

[Cancel]

Continue with the displayed settings

Netgate Installer - v1.2-RELEASE

ZFS Virtual Device Type Configuration

Select the ZFS Virtual Device configuration type.

☒ stripe Stripe - No Redundancy

[OK]

[Back]

[Cancel]

[1+ Disks] Striping provides maximum storage but no redundancy

Netgate Installer - v1.2-RELEASE

Disk Selection

Selected File System type: ZFS

ZFS Virtual Device type: Stripe [1+ Disks]

Partition Scheme: GPT

Select the disk(s) for software installation.

☒ **a0** 20G <VMware, VMware Virtual S>

[**Ok**]

[Advanced Options]

[Back]

[Cancel]

Use the spacebar to select the disk(s).

Netgate Installer - v1.2-RELEASE

Software Version to Install

Select the version of pfSense CE to install.

0000-2_8_1	Current Stable Version (2.8.1)
0001-2_8_0	Previous Stable Version (2.8.0)
0002-2_7_2	Previous Stable Version (2.7.2)

[OK]

[Cancel]

Installation Details

```
pkg-static: Warning: Major OS version upgrade detected.  Running "pkg boot
Updating pfSense-core repository catalogue...
Fetching meta.conf: . done
Fetching data: . done
Processing entries: . done
pfSense-core repository update completed. 4 packages processed.
Updating pfSense repository catalogue...
Fetching meta.conf: . done
Fetching data: ..... done
Processing entries:
Processing entries..... done
pfSense repository update completed. 541 packages processed.
All repositories are up to date.
The following 1 package(s) will be affected (of 0 checked):
```

```
New packages to be INSTALLED:
  pkg: 1.21.3_4 [pfSense]
```

```
Number of packages to be installed: 1
```

```
The process will require 46 MiB more space.
17 MiB to be downloaded.
```

Netgate Installer - v1.2-RELEASE

Complete

Installation of pfSense complete! Would you like to reboot into the installed system now?

[Reboot]

[Halt]

[Shell]

```
Starting syslog...done.  
Starting CRON... done.  
pfSense 2.8.1-RELEASE amd64 20260513-1943  
Bootup complete
```

```
FreeBSD/amd64 (pfSense.home.arpa) (ttyv0)
```

```
VMware Virtual Machine - Netgate Device ID: 522694ca151dd56268c1
```

```
*** Welcome to pfSense 2.8.1-RELEASE (amd64) on pfSense ***
```

```
WAN (wan) -> em0 -> v4/DHCP4: 192.168.235.132/24  
LAN (lan) -> em1 -> v4: 192.168.10.1/24
```

0) Logout / Disconnect SSH	9) pfTop
1) Assign Interfaces	10) Filter Logs
2) Set interface(s) IP address	11) Restart GUI
3) Reset admin account and password	12) PHP shell + pfSense tools
4) Reset to factory defaults	13) Update from console
5) Reboot system	14) Enable Secure Shell (sshd)
6) Halt system	15) Restore recent configuration
7) Ping host	16) Restart PHP-FPM
8) Shell	

```
Enter an option: █
```

Configuración del Kali

Virtual Machine Settings



Hardware Options

Device	Summary
Memory	8 GB
Processors	8
Hard Disk (NVMe)	40 GB
CD/DVD (SATA)	Using file C:\Users\Usuario\De...
Network Adapter	Bridged (Automatic)
USB Controller	Present
Sound Card	Auto detect
Display	Auto detect

Add...

Remove

Device status

- ☐ Connected
- ☒ Connect at power on

Network connection

- ☐ Bridged: Connected directly to the physical network
- ☐ Replicate physical network connection state
- ☐ NAT: Used to share the host's IP address
- ☐ Host-only: A private network shared with the host
- ☒ Custom: Specific virtual network

VMnet2 (Host-only)



- ☐ LAN segment:

LAN Segments...

Advanced...

OK

Cancel

Help

```

(itmar@kali)-[~]
$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 00:0c:29:04:b7:3b brd ff:ff:ff:ff:ff:ff
    inet 192.168.10.101/24 brd 192.168.10.255 scope global dynamic noprefixroute eth0
        valid_lft 7176sec preferred_lft 7176sec
    inet6 fe80::20c:29ff:fe04:b73b/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
3: tailscale0: <POINTOPOINT,MULTICAST,NOARP,UP,LOWER_UP> mtu 1280 qdisc fq_codel state UNKNOWN group
default qlen 500
    link/none
    inet6 fe80::d980:527d:be12:55f1/64 scope link stable-privacy proto kernel_ll
        valid_lft forever preferred_lft forever
4: docker0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default
    link/ether ea:ed:69:f0:e0:f8 brd ff:ff:ff:ff:ff:ff
    inet 172.17.0.1/16 brd 172.17.255.255 scope global docker0
        valid_lft forever preferred_lft forever
    inet6 fe80::e8ed:69ff:fe0:e0f8/64 scope link proto kernel_ll
        valid_lft forever preferred_lft forever
5: vetha952812@if2: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue master docker0 state UP
group default
    link/ether 66:28:68:b8:ff:a8 brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet6 fe80::6428:68ff:feb8:ffa8/64 scope link proto kernel_ll
        valid_lft forever preferred_lft forever

```

```

(itmar@kali)-[~]
$ ping -c 4 192.168.10.1
PING 192.168.10.1 (192.168.10.1) 56(84) bytes of data.
64 bytes from 192.168.10.1: icmp_seq=1 ttl=64 time=0.621 ms
64 bytes from 192.168.10.1: icmp_seq=2 ttl=64 time=1.01 ms
64 bytes from 192.168.10.1: icmp_seq=3 ttl=64 time=1.05 ms
64 bytes from 192.168.10.1: icmp_seq=4 ttl=64 time=0.731 ms

--- 192.168.10.1 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3005ms
rtt min/avg/max/mdev = 0.621/0.851/1.047/0.180 ms

```

Kali LinuxFreeBSD 64-bit

AplicacionesLugares18 de may 17:397%31%↑ 0.1 kB↓ 0.0 kB

pfSense - Login

Not securehttps://192.168.10.1

OffSecKali LinuxKali ToolsKali DocsKali ForumsKali NetHunter

Login to pfSense

SIGN IN

admin

.....

SIGN IN

pfSense is developed and maintained by Netgate. © ESF 2004 - 2026 [View license.](#)

AplicacionesLugares18 de may 17:451%32%↑ 0.2 kB↓ 0.0 kB

pfSense.home.arpa - Wiz

Not securehttps://192.168.10.1/wizard.php?xml=setup_wizard.xml

OffSecKali LinuxKali ToolsKali DocsKali ForumsKali NetHunter

COMMUNITY EDITION

WARNING:
The password for this account is insecure. Password is currently set to the default value (pfsense).
[Change the password as soon as possible.](#)

Wizard / pfSense Setup /

Step

pfSense Setup

Welcome to pfSense® software!

This wizard will provide guidance through the initial configuration of pfSense.

The wizard may be stopped at any time by clicking the logo image at the top of the screen.

pfSense® software is developed and maintained by Netgate®

Learn more

>> Next

pfSense is developed and maintained by Netgate. © ESF 2004 - 2026 View license.

WARNING:

The password for this account is insecure. Password is currently set to the default value (pfsense).
[Change the password as soon as possible.](#)

Wizard / [pfSense Setup](#) / [Netgate® Global Support is available 24/7](#) ?

Step 1 of 9

Netgate® Global Support is available 24/7

Our 24/7 worldwide team of support engineers are the most qualified to diagnose your issue and resolve it quickly, from branch office to enterprise — on premises to cloud.

We offer several support subscription plans tailored to fit different environment sizes and requirements. Many companies around the world choose Netgate support because:

- Support is available 24 hours a day, seven days a week, including holidays.
- Support engineers are located around the world, ensuring that no support call is missed.
- Our support engineers hold many prestigious network engineer certificates and have years of hands-on experience with networking.

[Learn more](#)

[» Next](#)

Wizard / pfSense Setup / General Information



Step 2 of 9

General Information

On this screen the general pfSense parameters will be set.

Hostname

Name of the firewall host, without domain part.

Examples: pfsense, firewall, edgefw

Domain

Domain name for the firewall.

Examples: home.arpa, example.com

Do not end the domain name with '.local' as the final part (Top Level Domain, TLD). The 'local' TLD is widely used by mDNS (e.g. Avahi, Bonjour, Rendezvous, Airprint, Airplay) and some Windows systems and networked devices. These will not network correctly if the router uses 'local' as its TLD. Alternatives such as 'home.arpa', 'local.lan', or 'mylocal' are safe.

The default behavior of the DNS Resolver will ignore manually configured DNS servers for client queries and query root DNS servers directly. To use the manually configured DNS servers below for client queries, visit Services > DNS Resolver and enable DNS Query Forwarding after completing the wizard.

Primary DNS Server

Secondary DNS Server

Override DNS



Allow DNS servers to be overridden by DHCP/PPP on WAN

>> Next



System ▾ Interfaces ▾ Firewall ▾ Services ▾ VPN ▾ Status ▾ Diagnostics ▾ Help ▾



WARNING:

The password for this account is insecure. Password is currently set to the default value (pfsense).
[Change the password as soon as possible.](#)

Wizard / pfSense Setup / Time Server Information



Step 3 of 9

Time Server Information

Please enter the time, date and time zone.

Time server
hostname

Enter the hostname (FQDN) of the time server.

Timezone



>> Next

WARNING:

The password for this account is insecure. Password is currently set to the default value (pfsense).
[Change the password as soon as possible.](#)

Wizard / [pfSense Setup](#) / [Configure WAN Interface](#)



Step 4 of 9

Configure WAN Interface

On this screen the Wide Area Network information will be configured.

Configuration Type

General configuration

MAC Address

This field can be used to modify ("spoof") the MAC address of the WAN interface (may be required with some cable connections). Enter a MAC address in the following format: xx:xx:xx:xx:xx:xx or leave blank.

MTU

Set the MTU of the WAN interface. If this field is left blank, an MTU of 1492 bytes for PPPoE and 1500 bytes for all other connection types will be assumed.

MSS

If a value is entered in this field, then MSS clamping for TCP connections to the value entered above minus 40 (TCP/IP header size) will be in effect. If this field is left blank, an MSS of 1492 bytes for PPPoE and 1500 bytes for all other connection types will be assumed. This should match the above MTU value in most all cases.

Static IP Configuration

IP Address

Subnet Mask

Upstream Gateway

DHCP client configuration

DHCP Hostname

The value in this field is sent as the DHCP client identifier and hostname when requesting a DHCP lease. Some ISPs may require this (for client identification).

PPPoE configuration

PPPoE Username

PPPoE Password

Show PPPoE
password

☐ Reveal password characters

PPPoE Service
name

Hint: this field can usually be left empty

PPPoE Dial on
demand

☐ Enable Dial-On-Demand mode

This option causes the interface to operate in dial-on-demand mode, allowing a virtual full time connection. The interface is configured, but the actual connection of the link is delayed until qualifying outgoing traffic is detected.

PPPoE Idle timeout

If no qualifying outgoing packets are transmitted for the specified number of seconds, the connection is brought down. An idle timeout of zero disables this feature.

PPTP configuration

PPTP Username

PPTP Password

Show PPTP
password

☐ Reveal password characters

PPTP Local IP
Address

pptplocalsubnet

PPTP Remote IP
Address

PPTP Dial on
demand

☐ Enable Dial-On-Demand mode

This option causes the interface to operate in dial-on-demand mode, allowing a virtual full time connection. The interface is configured, but the actual connection of the link is delayed until qualifying outgoing traffic is detected.

PPTP Idle timeout

If no qualifying outgoing packets are transmitted for the specified number of seconds, the connection is brought down. An idle timeout of zero disables this feature.

RFC1918 Networks

Block RFC1918
Private Networks

☒ Block private networks from entering via WAN

When set, this option blocks traffic from IP addresses that are reserved for private networks as per RFC 1918 (10/8, 172.16/12, 192.168/16) as well as loopback addresses (127/8). This option should generally be left turned on, unless the WAN network lies in such a private address space, too.

Block bogon networks

Block bogon
networks

☒ Block non-Internet routed networks from entering via WAN

When set, this option blocks traffic from IP addresses that are reserved (but not RFC 1918) or not yet assigned by IANA. Bogons are prefixes that should never appear in the Internet routing table, and obviously should not appear as the source address in any packets received.

>> Next

Wizard / pfSense Setup / Configure LAN Interface



Step 5 of 9

Configure LAN Interface

On this screen the Local Area Network information will be configured.

LAN IP Address

Type dhcp if this interface uses DHCP to obtain its IP address.

Subnet Mask

>> Next



Step 6 of 9

Change admin Account Password

Change the password for the admin account.

This account is used to access the GUI, console (if protected), and SSH service (if enabled).

New admin
Password

Confirm admin
Password

>> Next



Step 7 of 9

Reload configuration

Click 'Reload' to reload pfSense with new changes.

>> Reload



Step 9 of 9

Wizard completed.

Congratulations! pfSense is now configured.

We recommend that you check to see if there are any software updates available. Keeping your software up to date is one of the most important things you can do to maintain the security of your network.

[Check for updates](#)

Remember, we're here to help.

[Click here](#) to learn about Netgate 24/7/365 support services.

User survey



Please help all the people involved in improving and expanding pfSense software by taking a moment to answer this short survey (all answers are anonymous)

[Anonymous User Survey](#)

Useful resources.

- Learn more about Netgate's product line, services, and pfSense software from our [website](#)
- To learn about Netgate appliances and other offers, [visit our store](#)
- Become part of the pfSense community. Visit our [forum](#)
- Subscribe to our [newsletter](#) for ongoing product information, software announcements and special offers.


Finish

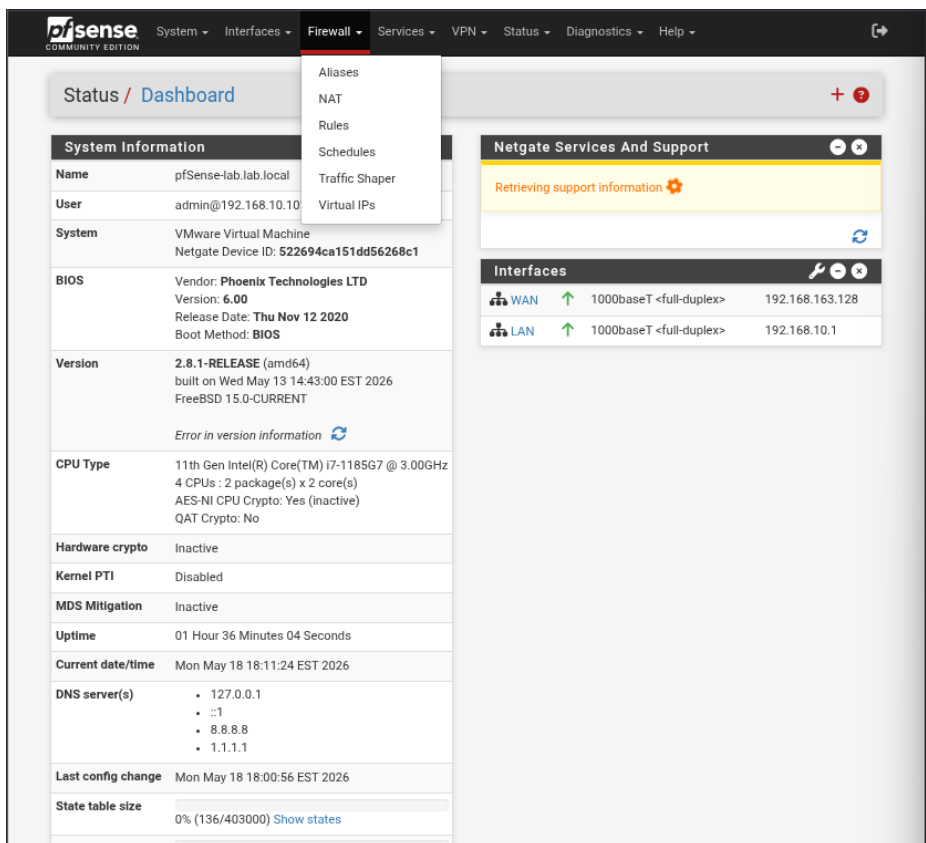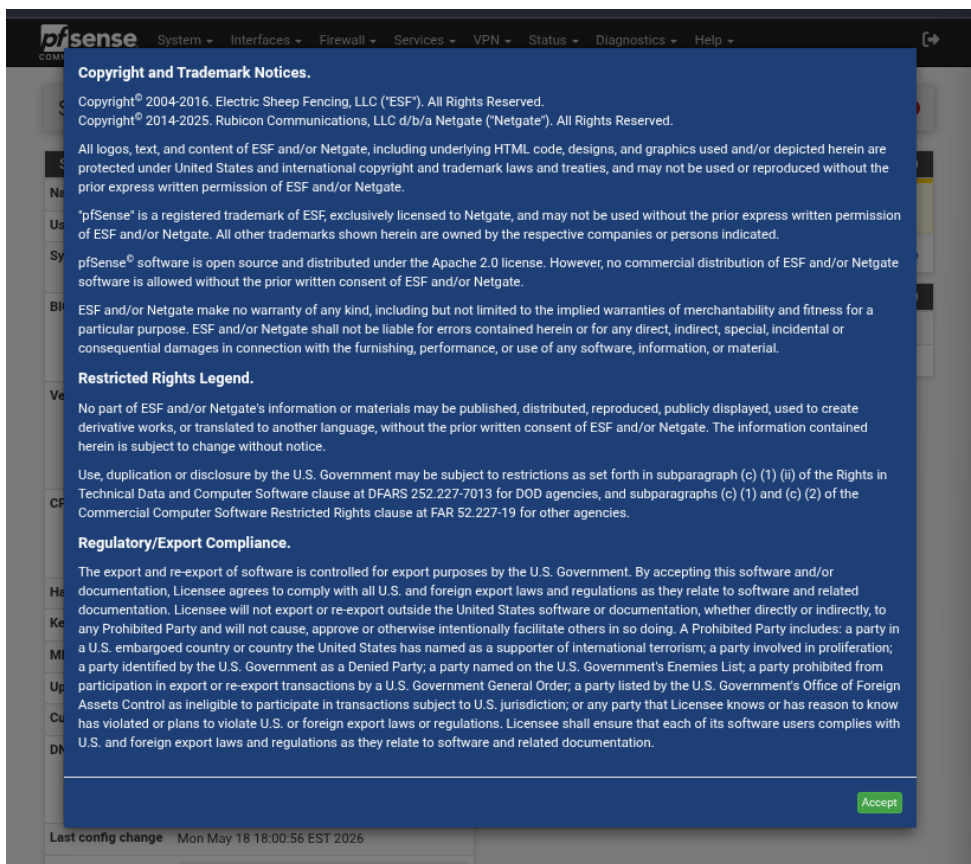

Floating WAN LAN

Rules (Drag to Change Order)

☐	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
☒	3/1.54 MiB	*	*	*	LAN Address	443 80	*	*		Anti-Lockout Rule	
☐	55/2.45 MiB	IPv4 *	LAN subnets	*	*	*	*	none		Default allow LAN to any rule	    
☐	0/0 B	IPv6 *	LAN subnets	*	*	*	*	none		Default allow LAN IPv6 to any rule	    



Edit Firewall Rule

Action

Pass

Choose what to do with packets that match the criteria specified below.

Hint: the difference between block and reject is that with reject, a packet (TCP RST or ICMP port unreachable for UDP) is returned to the sender, whereas with block the packet is dropped silently. In either case, the original packet is discarded.

Disabled☐ Disable this rule

Set this option to disable this rule without removing it from the list.

Interface

LAN

Choose the interface from which packets must come to match this rule.

Address Family

IPv4

Select the Internet Protocol version this rule applies to.

Protocol

TCP

Choose which IP protocol this rule should match.

Source

Source☐ Invert match

Any

Source Address

/

▼



The **Source Port Range** for a connection is typically random and almost never equal to the destination port. In most cases this setting must remain at its default value, **any**.

Source

Source

☐ Invert match

LAN subnets

Source Address
 /

⚙ Display Advanced

The **Source Port Range** for a connection is typically random and almost never equal to the destination port. In most cases this setting must remain at its default value, **any**.

Destination

Destination

☐ Invert match

Any

Destination Address
 /

Destination Port Range

HTTP (80)

HTTP (80)

From
 Custom
 To
 Custom

Specify the destination port or port range for this rule. The "To" field may be left empty if only filtering a single port.

Extra Options

Log
 ☐ Log packets that are handled by this rule

Hint: the firewall has limited local log space. Don't turn on logging for everything. If doing a lot of logging, consider using a remote syslog server (see the [Status: System Logs: Settings](#) page).

Description

Allow HTTP HTTPS

A description may be entered here for administrative reference. A maximum of 52 characters will be used in the ruleset label and displayed in the firewall log.

Advanced Options

⚙ Display Advanced

Save

Firewall / Rules / LAN

The firewall rule configuration has been changed.

The changes must be applied for them to take effect.

✓ Apply Changes

Floating
 WAN
 LAN

Rules (Drag to Change Order)

☐	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
☒	2/1.61 MiB	*	*	*	LAN Address	443 80	*	*		Anti-Lockout Rule	⚙
☐	0/0 B	IPv4 TCP	LAN subnets	*	*	80 (HTTP)	*	none		Allow HTTP HTTPS	⚙ ✎ 📄 🚫 🗑
☐	44/2.58 MiB	IPv4 *	LAN subnets	*	*	*	*	none		Default allow LAN to any rule	⚙ ✎ 📄 🚫 🗑
☐	0/0 B	IPv6 *	LAN subnets	*	*	*	*	none		Default allow LAN IPv6 to any rule	⚙ ✎ 📄 🚫 🗑

⬆ Add

⬇ Add

🗑 Delete

🔄 Toggle

📄 Copy

💾 Save

⬆⬇ + Separator

Firewall / Rules / LAN

The changes have been applied successfully. The firewall rules are now reloading in the background.
[Monitor](#) the filter reload progress.

Floating WAN LAN

Rules (Drag to Change Order)

☐	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
☐	✓ 4/1.63 MiB	*	*	*	LAN Address	443 80	*	*		Anti-Lockout Rule	
☐	✓ 0/0 B	IPv4 TCP	LAN subnets	*	*	80 (HTTP)	*	none		Allow HTTP HTTPS	
☐	✓ 52/2.59 MiB	IPv4 *	LAN subnets	*	*	*	*	none		Default allow LAN to any rule	
☐	✓ 0/0 B	IPv6 *	LAN subnets	*	*	*	*	none		Default allow LAN IPv6 to any rule	

Add Add Delete Toggle Copy Save Separator

2

Firewall / Rules / Edit

Edit Firewall Rule

Action

Block

Choose what to do with packets that match the criteria specified below.
Hint: the difference between block and reject is that with reject, a packet (TCP RST or ICMP port unreachable for UDP) is returned to the sender, whereas with block the packet is dropped silently. In either case, the original packet is discarded.

Disabled

☐ Disable this rule

Set this option to disable this rule without removing it from the list.

Interface

LAN

Choose the interface from which packets must come to match this rule.

Address Family

IPv4

Select the Internet Protocol version this rule applies to.

Protocol

TCP

Choose which IP protocol this rule should match.

Source

Source

☐ Invert match

LAN subnets

Source Address

/

⚙ Display Advanced

The **Source Port Range** for a connection is typically random and almost never equal to the destination port. In most cases this setting must remain at its default value, **any**.

Destination

Destination

☐ Invert match

Any

Destination Address

/

Destination Port Range

Telnet (23)

Telnet (23)

From

Custom

To

Custom

Specify the destination port or port range for this rule. The "To" field may be left empty if only filtering a single port.

Extra Options

Log

☒ Log packets that are handled by this rule

Hint: the firewall has limited local log space. Don't turn on logging for everything. If doing a lot of logging, consider using a remote syslog server (see the [Status: System Logs: Settings](#) page).

Description

Block TELNET

A description may be entered here for administrative reference. A maximum of 52 characters will be used in the ruleset label and displayed in the firewall log.

Advanced Options

⚙ Display Advanced

💾 Save

The changes have been applied successfully. The firewall rules are now reloading in the background.
[Monitor the filter reload progress.](#)

Floating

WAN

LAN

Rules (Drag to Change Order)

☐	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
☒	✓ 4/1.78 MiB	*	*	*	LAN Address	443 80	*	*		Anti-Lockout Rule	⚙
☐	✗ 0/0 B ⚙	IPv4 TCP	LAN subnets	*	*	23 (Telnet)	*	none		Block TELNET	📌 ✎ 📄 🚫
☐	✓ 0/0 B	IPv4 TCP	LAN subnets	*	*	80 (HTTP)	*	none		Allow HTTP HTTPS	📌 ✎ 📄 🚫
☐	✓ 67/3.29 MiB	IPv4 *	LAN subnets	*	*	*	*	none		Default allow LAN to any rule	📌 ✎ 📄 🚫
☐	✓ 0/0 B	IPv6 *	LAN subnets	*	*	*	*	none		Default allow LAN IPv6 to any rule	📌 ✎ 📄 🚫

⬆ Add

⬇ Add

🗑 Delete

🔄 Toggle

📄 Copy

💾 Save

⚡ Separator

Firewall / Rules / Edit

Edit Firewall Rule

Action

Block

Choose what to do with packets that match the criteria specified below.
Hint: the difference between block and reject is that with reject, a packet (TCP RST or ICMP port unreachable for UDP) is returned to the sender, whereas with block the packet is dropped silently. In either case, the original packet is discarded.

Disabled

☐ Disable this rule

Set this option to disable this rule without removing it from the list.

Interface

LAN

Choose the interface from which packets must come to match this rule.

Address Family

IPv4

Select the Internet Protocol version this rule applies to.

Protocol

TCP

Choose which IP protocol this rule should match.

Source

Source

☐ Invert match

LAN subnets

Source Address

/

Display Advanced

The **Source Port Range** for a connection is typically random and almost never equal to the destination port. In most cases this setting must remain at its default value, **any**.

Destination

Destination

☐ Invert match

Any

Destination Address

/

Destination Port Range

FTP (21)

From

Custom

FTP (21)

To

Custom

Specify the destination port or port range for this rule. The "To" field may be left empty if only filtering a single port.

Extra Options

Log

☒ Log packets that are handled by this rule

Hint: the firewall has limited local log space. Don't turn on logging for everything. If doing a lot of logging, consider using a remote syslog server (see the [Status: System Logs: Settings](#) page).

Description

Block FTP

A description may be entered here for administrative reference. A maximum of 52 characters will be used in the ruleset label and displayed in the firewall log.

Advanced Options

Display Advanced

Save

The changes have been applied successfully. The firewall rules are now reloading in the background.
[Monitor the filter reload progress.](#)

Floating WAN LAN

Rules (Drag to Change Order)											
☐	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
☒	✓ 4/1.82 MiB	*	*	*	LAN Address	443 80	*	*		Anti-Lockout Rule	
☐	✗ 0/0 B	IPv4 TCP	LAN subnets	*	*	21 (FTP)	*	none		Block FTP	
☐	✗ 0/0 B	IPv4 TCP	LAN subnets	*	*	23 (Telnet)	*	none		Block TELNET	
☐	✓ 0/0 B	IPv4 TCP	LAN subnets	*	*	80 (HTTP)	*	none		Allow HTTP HTTPS	
☐	✓ 63/3.36 MiB	IPv4 *	LAN subnets	*	*	*	*	none		Default allow LAN to any rule	
☐	✓ 0/0 B	IPv6 *	LAN subnets	*	*	*	*	none		Default allow LAN IPv6 to any rule	

Add
 Add
 Delete
 Toggle
 Copy
 Save
 Separator

Actualizo paquetes de Kali

```
(itmar@kali)-[~]
└─$ sudo apt update
Des:2 https://pkgs.tailscale.com/stable/debian bullseye InRelease
Des:1 http://kali.download/kali kali-rolling InRelease [34.0 kB]
Des:3 http://kali.download/kali kali-rolling/main amd64 Packages [20.9 MB]
Des:4 http://kali.download/kali kali-rolling/main amd64 Contents (deb) [52.9 MB]
Des:5 http://kali.download/kali kali-rolling/contrib amd64 Packages [116 kB]
Des:6 http://kali.download/kali kali-rolling/contrib amd64 Contents (deb) [258 kB]
Des:7 http://kali.download/kali kali-rolling/non-free amd64 Packages [188 kB]
Des:8 http://kali.download/kali kali-rolling/non-free amd64 Contents (deb) [910 kB]
Des:9 http://kali.download/kali kali-rolling/non-free-firmware amd64 Packages [15.4 kB]
Des:10 http://kali.download/kali kali-rolling/non-free-firmware amd64 Contents (deb) [38
.7 kB]
Descargados 75.3 MB en 16s (4,748 kB/s)
Se pueden actualizar 292 paquetes. Ejecute «apt list --upgradable» para verlos.

(itmar@kali)-[~]
└─$
```

Instalación del Cliente TELNET

```
(itmar@kali)-[~]
└─$ sudo apt install telnet -y
Actualizando:
  inetutils-telnet

Instalando:
  telnet

Resumen:
  Actualizando: 1, Instalando 1, Eliminando: 0, no actualizando: 291
  Tamaño de la descarga: 176 kB
  Espacio necesario: 59.4 kB / 7,590 MB disponible

Des:1 http://kali.download/kali kali-rolling/main amd64 inetutils-telnet amd64 2:2.8-2 [132 kB]
Des:2 http://http.kali.org/kali kali-rolling/main amd64 telnet all 0.17+2.8-2 [44.8 kB]
Descargados 176 kB en 1s (289 kB/s)
(Leyendo la base de datos ... 511531 ficheros o directorios instalados actualmente.)
Preparando para desempaquetar .../inetutils-telnet_2%3a2.8-2_amd64.deb ...
Desempaquetando inetutils-telnet (2:2.8-2) sobre (2:2.7-5) ...
Seleccionando el paquete telnet previamente no seleccionado.
Preparando para desempaquetar .../telnet_0.17+2.8-2_all.deb ...
Desempaquetando telnet (0.17+2.8-2) ...
Configurando inetutils-telnet (2:2.8-2) ...
Configurando telnet (0.17+2.8-2) ...
Procesando disparadores para kali-menu (2026.2.3) ...
Procesando disparadores para man-db (2.13.1-1) ...

(itmar@kali)-[~]
└─$ sudo apt install telnet -y
telnet ya está en su versión más reciente (0.17+2.8-2).
Resumen:
  Actualizando: 0, Instalando 0, Eliminando: 0, no actualizando: 291

(itmar@kali)-[~]
└─$
```

Prueba de Bloqueo TELNET — Conexión a telehack.com:23

```
(itmar@kali)-[~]
└─$ telnet telehack.com 23
Trying 64.13.139.230...
Connection failed: Expiró el tiempo de conexión
Trying 2001:470:67:c0::1337...
telnet: Unable to connect to remote host: La red es inaccesible
```

```
(itmar@kali)-[~]
└─$ ftp speedtest.tele2.net
Trying 90.130.70.73:21 ...
ftp: Can't connect to `90.130.70.73:21': Expiró el tiempo de conexión
Trying [2a00:800:1010::1]:21 ...
ftp: Can't connect to `2a00:800:1010::1:21': La red es inaccesible
ftp: Can't connect to `speedtest.tele2.net:ftp'
ftp>
```

```
(itmar@kali)-[~]
$ curl http://example.com
<!doctype html><html lang="en"><head><title>Example Domain</title><meta name="viewport" content="width=device-width, initial-scale=1"><style>body{background:#eee;width:60vw;margin:15vh auto;font-family:system-ui,sans-serif}h1{font-size:1.5em}div{opacity:0.8}a:link,a:visited{color:#348}</style></head><body><div><h1>Example Domain</h1><p>This domain is for use in documentation examples without needing permission. Avoid use in operations.</p><p><a href="https://iana.org/domains/example">Learn more</a></p></div></body></html>
```

```
(itmar@kali)-[~]
$ curl https://example.com
<!doctype html><html lang="en"><head><title>Example Domain</title><meta name="viewport" content="width=device-width, initial-scale=1"><style>body{background:#eee;width:60vw;margin:15vh auto;font-family:system-ui,sans-serif}h1{font-size:1.5em}div{opacity:0.8}a:link,a:visited{color:#348}</style></head><body><div><h1>Example Domain</h1><p>This domain is for use in documentation examples without needing permission. Avoid use in operations.</p><p><a href="https://iana.org/domains/example">Learn more</a></p></div></body></html>
```

pf

sense

COMMUNITY EDITION

System

Interfaces

Firewall

Services

VPN

Status

Diagnostics

Help

Status / System Logs / Firewall / Normal View

System

Firewall

DHCP

Authentication

IPsec

PPP

PPPoE/L2TP Server

OpenVPN

NTP

Packages

Settings

Normal View

Dynamic View

Summary View

Last 500 Firewall Log Entries. (Maximum 500)

Action	Time	Interface	Rule	Source	Destination	Protocol
✗	May 18 19:15:40	WAN	Default deny rule IPv4 (1000000103)	 192.73.243.135:443	 192.168.163.128:4105	TCP:PA
✗	May 18 19:15:40	WAN	Default deny rule IPv4 (1000000103)	 192.73.243.135:443	 192.168.163.128:4105	TCP:PA
✗	May 18 19:15:40	WAN	Default deny rule IPv4 (1000000103)	 192.73.243.135:443	 192.168.163.128:4105	TCP:PA
✗	May 18 19:15:40	WAN	Default deny rule IPv4 (1000000103)	 192.73.243.135:443	 192.168.163.128:4105	TCP:PA
✗	May 18 19:15:41	WAN	Default deny rule IPv4 (1000000103)	 192.73.243.135:443	 192.168.163.128:4105	TCP:PA
✗	May 18 19:15:43	WAN	Default deny rule IPv4 (1000000103)	 192.73.243.135:443	 192.168.163.128:4105	TCP:PA
✗	May 18 19:15:45	WAN	Default deny rule IPv4 (1000000103)	 192.200.0.112:80	 192.168.163.128:42339	TCP:PA
✗	May 18 19:15:45	WAN	Default deny rule IPv4 (1000000103)	 192.200.0.112:80	 192.168.163.128:42339	TCP:PA
✗	May 18 19:15:45	WAN	Default deny rule IPv4 (1000000103)	 192.200.0.112:80	 192.168.163.128:42339	TCP:PA
✗	May 18 19:15:45	WAN	Default deny rule IPv4 (1000000103)	 192.200.0.112:80	 192.168.163.128:42339	TCP:PA
✗	May 18 19:15:46	WAN	Default deny rule IPv4 (1000000103)	 192.200.0.112:80	 192.168.163.128:42339	TCP:PA
✗	May 18 19:15:47	WAN	Default deny rule IPv4	 192.73.243.135:443	 192.168.163.128:4105	TCP:PA

✗	May 18 19:33:24	LAN	Block TELNET (1779147934)	i 192.168.10.102:38936	i 64.13.139.230:23	TCP:S
✗	May 18 19:33:25	LAN	Block TELNET (1779147934)	i 192.168.10.102:38936	i 64.13.139.230:23	TCP:S
✗	May 18 19:33:25	LAN	Block TELNET (1779147934)	i 192.168.10.102:38936	i 64.13.139.230:23	TCP:S
✗	May 18 19:33:27	LAN	Block TELNET (1779147934)	i 192.168.10.102:38936	i 64.13.139.230:23	TCP:S
✗	May 18 19:33:28	LAN	Block TELNET (1779147934)	i 192.168.10.102:38936	i 64.13.139.230:23	TCP:S
✗	May 18 19:33:30	LAN	Block TELNET (1779147934)	i 192.168.10.102:38936	i 64.13.139.230:23	TCP:S
✗	May 18 19:33:31	LAN	Block TELNET (1779147934)	i 192.168.10.102:38936	i 64.13.139.230:23	TCP:S
✗	May 18 19:33:36	LAN	Block TELNET (1779147934)	i 192.168.10.102:38936	i 64.13.139.230:23	TCP:S

✗	May 18 19:36:08	LAN	Block FTP (1779148094)	i 192.168.10.102:57444	i 90.130.70.73:21	TCP:S
✗	May 18 19:36:09	LAN	Block FTP (1779148094)	i 192.168.10.102:57444	i 90.130.70.73:21	TCP:S
✗	May 18 19:36:10	LAN	Block FTP (1779148094)	i 192.168.10.102:57444	i 90.130.70.73:21	TCP:S
✗	May 18 19:36:11	LAN	Block FTP (1779148094)	i 192.168.10.102:57444	i 90.130.70.73:21	TCP:S
✗	May 18 19:36:12	LAN	Block FTP (1779148094)	i 192.168.10.102:57444	i 90.130.70.73:21	TCP:S
✗	May 18 19:36:13	LAN	Block FTP (1779148094)	i 192.168.10.102:57444	i 90.130.70.73:21	TCP:S
✗	May 18 19:36:15	LAN	Block FTP (1779148094)	i 192.168.10.102:57444	i 90.130.70.73:21	TCP:S
✗	May 18 19:36:19	LAN	Block FTP (1779148094)	i 192.168.10.102:57444	i 90.130.70.73:21	TCP:S
✗	May 18 19:36:27	LAN	Block FTP (1779148094)	i 192.168.10.102:57444	i 90.130.70.73:21	TCP:S
✗	May 18 19:36:43	LAN	Block FTP (1779148094)	i 192.168.10.102:57444	i 90.130.70.73:21	TCP:S
✗	May 18 19:37:16	LAN	Block FTP (1779148094)	i 192.168.10.102:57444	i 90.130.70.73:21	TCP:S

```
(itmar@kali)-[~]
$ curl http://localhost
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01//EN" "http://www.w3.org/TR/html4/strict.dtd">
<html><head>
<title>301 Moved Permanently</title>
</head><body>
<h1>Moved Permanently</h1>
<p>The document has moved <a href="https://localhost/">here</a>.</p>
</body></html>

(itmar@kali)-[~]
$
```

```
(itmar@kali)-[~]
$ echo "<h1>pfSense Port Forward OK</h1>" | sudo tee /var/www/html/index.html
<h1>pfSense Port Forward OK</h1>

(itmar@kali)-[~]
$
```



```

(itmar@kali)-[~]
$ curl -k https://localhost
<h1>pfSense Port Forward OK</h1>

(itmar@kali)-[~]
$ curl http://localhost
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01//EN" "http://www.w3.org/TR/html4/strict.dtd">
<html><head>
<title>301 Moved Permanently</title>
</head><body>
<h1>Moved Permanently</h1>
<p>The document has moved <a href="https://localhost/">here</a>.</p>
</body></html>

(itmar@kali)-[~]
$

```

pfsense COMMUNITY EDITION System ▾ Interfaces ▾ Firewall ▾ Services ▾ VPN ▾ Status ▾ Diagnostics ▾ Help ▾

Firewall / NAT / Port Forward ?

Port Forward 1:1 Outbound NPT

Rules										
☐	Interface	Protocol	Source Address	Source Ports	Dest. Address	Dest. Ports	NAT IP	NAT Ports	Description	Actions
↑ Add ↓ Add 🗑 Delete 🔄 Toggle 💾 Save ⛶ Separator										

Firewall / NAT / Port Forward / Edit



Edit Redirect Entry

Disabled ☐ Disable this rule

No RDR (NOT) ☐ Disable redirection for traffic matching this rule
This option is rarely needed. Don't use this without thorough knowledge of the implications.

Interface WAN ▾
Choose which interface this rule applies to. In most cases "WAN" is specified.

Address Family IPv4 ▾
Select the Internet Protocol version this rule applies to.

Protocol TCP ▾
Choose which protocol this rule should match. In most cases "TCP" is specified.

Source ⚙ Display Advanced

Destination ☐ Invert match. WAN address ▾ Address/mask ▾
Type

Destination port range HTTP ▾ From port Custom HTTP ▾ To port Custom
Specify the port or port range for the destination of the packet for this mapping. The 'to' field may be left empty if only mapping a single port.

Redirect target IP Address or Alias ▾ 192.168.10.100
Type Address
Enter the internal IP address of the server on which to map the ports. e.g.: 192.168.1.12 for IPv4
In case of IPv6 addresses, it must be from the same "scope",
i.e. it is not possible to redirect from link-local addresses scope (fe80:*) to local scope (::1)

Redirect target port HTTP ▾ Port Custom
Specify the port on the machine with the IP address entered above. In case of a port range, specify the beginning port of the range (the end port will be calculated automatically).
This is usually identical to the "From port" above.

Description Port Forward HTTP
A description may be entered here for administrative reference (not parsed).

No XMLRPC Sync ☐ Do not automatically sync to other CARP members
This prevents the rule on Master from automatically syncing to other CARP members. This does NOT prevent the rule from being overwritten on Slave.

NAT reflection Use system default ▾

Filter rule association Add associated filter rule ▾
The "pass" selection does not work properly with Multi-WAN. It will only work on an interface containing the default gateway.

Save

pfSense

COMMUNITY EDITION

System ▾ Interfaces ▾ Firewall ▾ Services ▾ VPN ▾ Status ▾ Diagnostics ▾ Help ▾

Firewall / NAT / Port Forward

?

The changes have been applied successfully. The firewall rules are now reloading in the background.
Monitor the filter reload progress.

×

Port Forward

1:1

Outbound

NPT

Rules

☐	Interface	Protocol	Source Address	Source Ports	Dest. Address	Dest. Ports	NAT IP	NAT Ports	Description	Actions
☐	☒ WAN	TCP	*	*	WAN address	80 (HTTP)	192.168.10.100	80 (HTTP)	Port Forward HTTP	

↑ Add

↓ Add

🗑 Delete

🔄 Toggle

💾 Save

+ Separator

Legend

▶

 Pass

🔗

 Linked rule

pfSense

COMMUNITY EDITION

System ▾ Interfaces ▾ Firewall ▾ Services ▾ VPN ▾ Status ▾ Diagnostics ▾ Help ▾

Status / Interfaces

?

WAN Interface (wan, em0)

Status

up

↑

DHCP

up

Release WAN

☐ Relinquish Lease

MAC Address

00:0c:29:26:94:74

IPv4 Address

192.168.163.128

Subnet mask IPv4

255.255.255.0

Gateway IPv4

192.168.163.2

IPv6 Link Local

fe80::20c:29ff:fe26:9474%em0

MTU

1500

Media

1000baseT <full-duplex>

In/out packets

79392/35344 (101.27 MiB/1.56 MiB)

In/out packets (pass)

79392/35344 (101.27 MiB/1.56 MiB)

In/out packets (block)

405/0 (81 KiB/0 B)

In/out errors

0/0

Collisions

0

LAN Interface (lan, em1)

Status

up

↑

MAC Address

00:0c:29:26:94:7e

IPv4 Address

192.168.10.1

Subnet mask IPv4

255.255.255.0

IPv6 Link Local

fe80::20c:29ff:fe26:947e%em1

MTU

1500

Media

1000baseT <full-duplex>

In/out packets

31977/75805 (1.55 MiB/101.07 MiB)

In/out packets (pass)

31977/75805 (1.55 MiB/101.07 MiB)

In/out packets (block)

273/0 (30 KiB/0 B)

In/out errors

0/0

Collisions

0

```
MAC Address: 00:0c:29:26:34:7e
(itmar@kali)-[~]
$ curl http://192.168.163.128
<html>
<head><title>301 Moved Permanently</title></head>
<body>
<center><h1>301 Moved Permanently</h1></center>
<hr><center>nginx</center>
</body>
</html>

(itmar@kali)-[~]
$
```