

APLIKASI MEDIA COALESCER

Oil Coalescer: Oil Water Separators Models HTC


In the Model HTC Oil Water Separators, the wastewater flows from the corrugated plate coalescer to the oil coalescing unit. The purpose of the coalescing unit is to polish the oil water separator effluent before final discharge. This unit is equipped with a polypropylene coalescing material, a ten layer blanket of coarse and fine polypropylene fibers, six inches thick. As the wastewater enters the coalescing media, residual oil particles in the water, down to 20 microns in size, become attached to the oleophilic strands. Once attached, oil globules coalesce; therefore, increasing oil globule size which accelerates the rate of rising oil. The oil globules wick-up the strands and when sufficiently large, break free and rise to the surface of the oil water separator.

APLIKASI MEDIA COALESCER

• PENGGANTIAN MEDIA COALESCER MEDIA ALTERNATIF 2

Rencana penggantian media Coalescer

Performance	Unit	DFI-15/150	DFI-15/350	DFI-15/500
Nominal Media Velocity	CFM	1600	1200	800
Initial Resistance	"w.g.	0.80	0.10	0.12
Final Resistance	"w.g.	.50	.80	1.00
Dust Holding Capacity	g/m ²	380	600	600

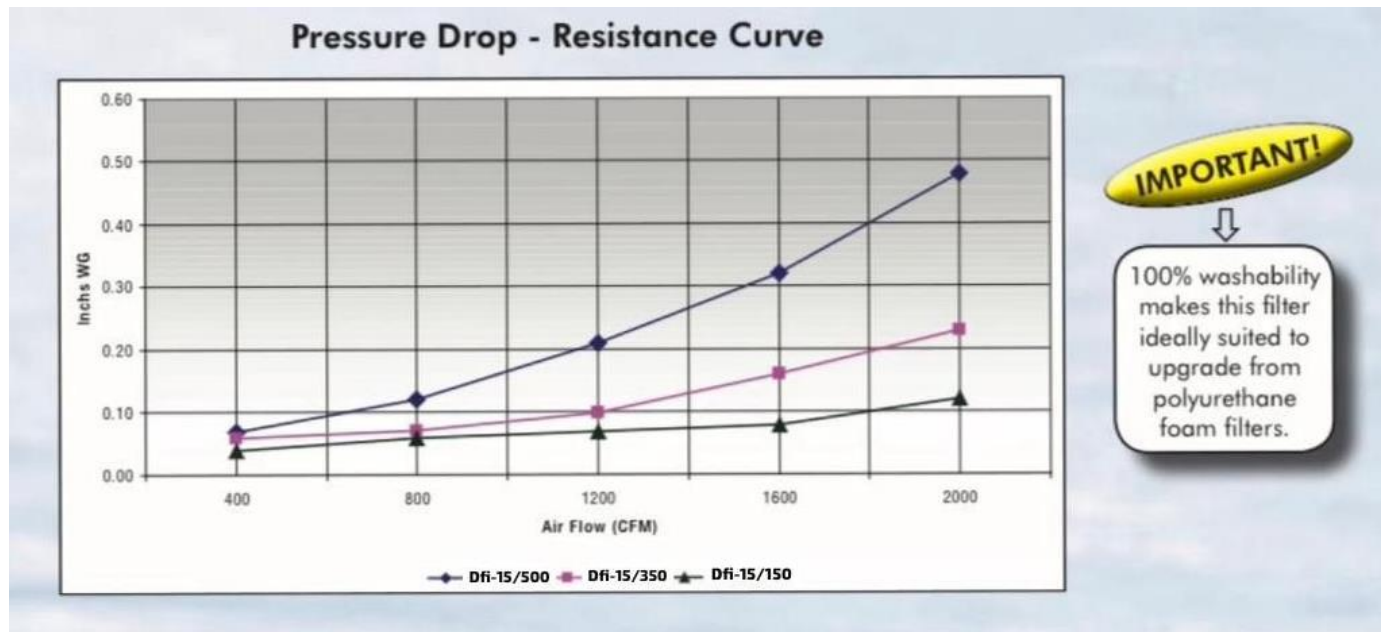


IMPROVEMENT OWS

- COALESCER MEDIA

RENCANA PERBAIKAN

Media Coalescer dan Casing di proses menjadi satu catridge sekali pakai

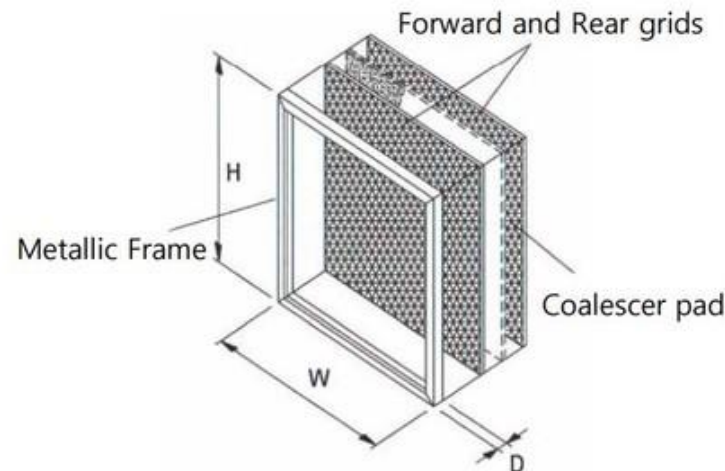

- Media coalescer sudah dalam Catridge, di proses khusus dari factory, proses persiapan dan ikat media ke casing bisa di hilangkan. Waktu lebih efektif dan efisien
- Frame casing dan media di satukan secara khusus dan otomatis dengan mesin di factory untuk menjamin tidak ada kebocoran/ baypass Filter.
- Frame casing bisa dipilih dari bahan metallic maupun non metallic disesuaikan aplikasi dan kemudahan disposal.



SEKIAN

TERIMA KASIH