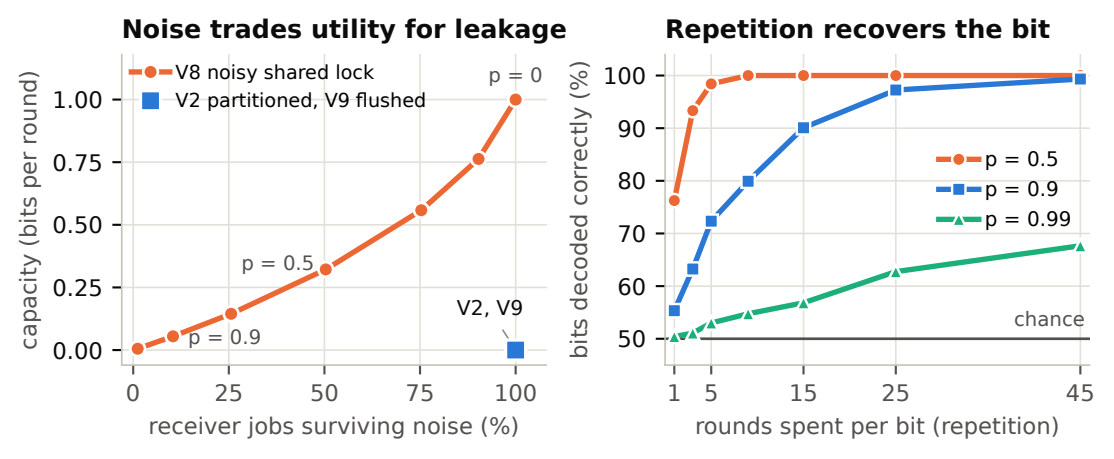
Noise trades utility for leakage
V8 noisy shared lock
V2 partitioned, V9 flushed
p = 0
p = 0.5
p = 0.9
V2, V9
capacity (bits per round)
1.00
0.75
0.50
0.25
0.00
0
25
50
75
100
receiver jobs surviving noise (%)
Repetition recovers the bit
bits decoded correctly (%)
100
90
80
70
60
50
p = 0.5
p = 0.9
p = 0.99
chance
1
5
15
25
45
rounds spent per bit (repetition)