


DRILL PIPE PUP JOINTS

DRILL PIPE PUP JOINTS

PARVEEN's D.P. P. J. is important drill stem component for special drilling or testing operations. This short drill pipe section is used to locate the top box of the drill string at a specified distance from the rig floor.

PARVEEN's D.P. P. J. is manufactured either from round bar or by machining heavy wall tubing from AISI-4145 H Material.

DRILL	RILL			TONG		MECHANICALPROPERTIES				AVAIL-		
PIPE					SPACE		TUBE		TOOL JOINT		ABLE	
NOMI-		TOOL	CONN.	ELEVATOR	LENG	THS		TOR-		TOR-	LENG	
NAL		JOINT	SIZE &	UPSET			TENSILE	SIONAL	TENSILE	SIONAL	THS	APPX.
SIZE	I.D."	O.D	TYPE	DIA	вох	PIN	YIELD	YIELD	YIELD	YIELD		WT.
Α"		C"		D"	E"	F"	(LB)	(FT-LB)	(LB)	(FT-LB)	G'	(LB)
3.1/2	2.3/8	4.3 /4	N.C.38	3.7/8	9.1/2	7	571,000	35,080	675,000	17580	5	142
		5	(3 ½							21600	10	226
			I.F.)								15	310
											20	394
3.1/2	2.11/16	4.3/4	N.C.38	3.7/8	9.1/2	7	434,330	29,030	538,400	16,000	5	131
		5	(3 ½								10	198
			I.F.)								15	265
											20	332
4	2.13/16	<u>5.1/4</u>	N.C.40	4.3/16	10	7	698,900	50,200	652,300	21,550	5	178
		5.1/2	(4 F.H.)								10	286
											15	394
											20	502
4	3.1 /4	<u>5.3/4</u>	N.C.46	4.1/2	10	7	469,800	37,480	826,100	30,450	5	168
		6	(4 I.F.)								10	241
											15	313
		_									20	386
4.1/2	3.1 /4	<u>6</u>	N.C.46	4.11/16	10	7	836,950	68,850	826,100	30,450	5	219
		6.1/4	(4 I.F.)								10	348
											15	477
4.4/0	0.4/0	0.4/0	0. 50	_	40	_	004.450	50.070	4047700	04.000	20	607
4.1/2	3.1/2	6.1/8	N.C.50	5	10	7	691,150	59,970	1017700	<u>34,860</u>	5 10	240
		6.1/4	(4.1 /2							<u>40,490</u> 40,980	15	311 417
		6.3/8	I.F.)							40,960	20	524
4.1/2	3.3/4	6.1/8	N.C.50	5	10	7	534,550	48,970	861,100	34,200	5	180
7.1/2	0.0/4	6.1/4	(4.1 /2		10		004,000	40,070	001,100	U-1,200	10	263
		6.3/8	I.F.)								15	345
		0.0/0	,								20	428
5	3.1/2	6.3/8	N.C.50	5.1/8	10	7	1101,500	98,600	1017700	40,980	5	253
	0.172	6.1/2	(4.1 /2	0.1/0	10	ĺ	,	30,000		,0,000	10	423
			I.F.)								15	593
			,,,								20	763
5	3.3/4	6.3/8	N.C.50	5.1/8	10	7	944,950	88,700	861,100	34,200	5	228
		6.1/2	(4.1 /2				,		,	,	10	374
			I.F.)								15	520
L			′								20	655

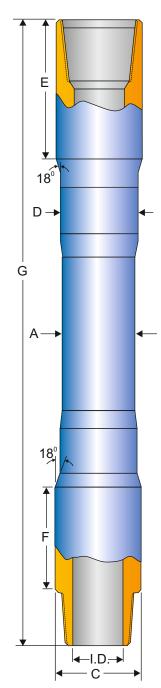

Ordering Information:

To order or request quotations on PARVEEN Pup Joints, please specify:-

- Nominal size. / Bore dia. / Tool joint O.D.
- Size and type of connections (Example: 4 ½" I.F. Box up X 4 ½" I.F. pin down, etc.)
- Overall length, shoulder-to-shoulder / 18° taper or square shoulder / Pressed or cast steel thread protectors

Note: Stress relief groove as per API-7 can also be provided upon request.