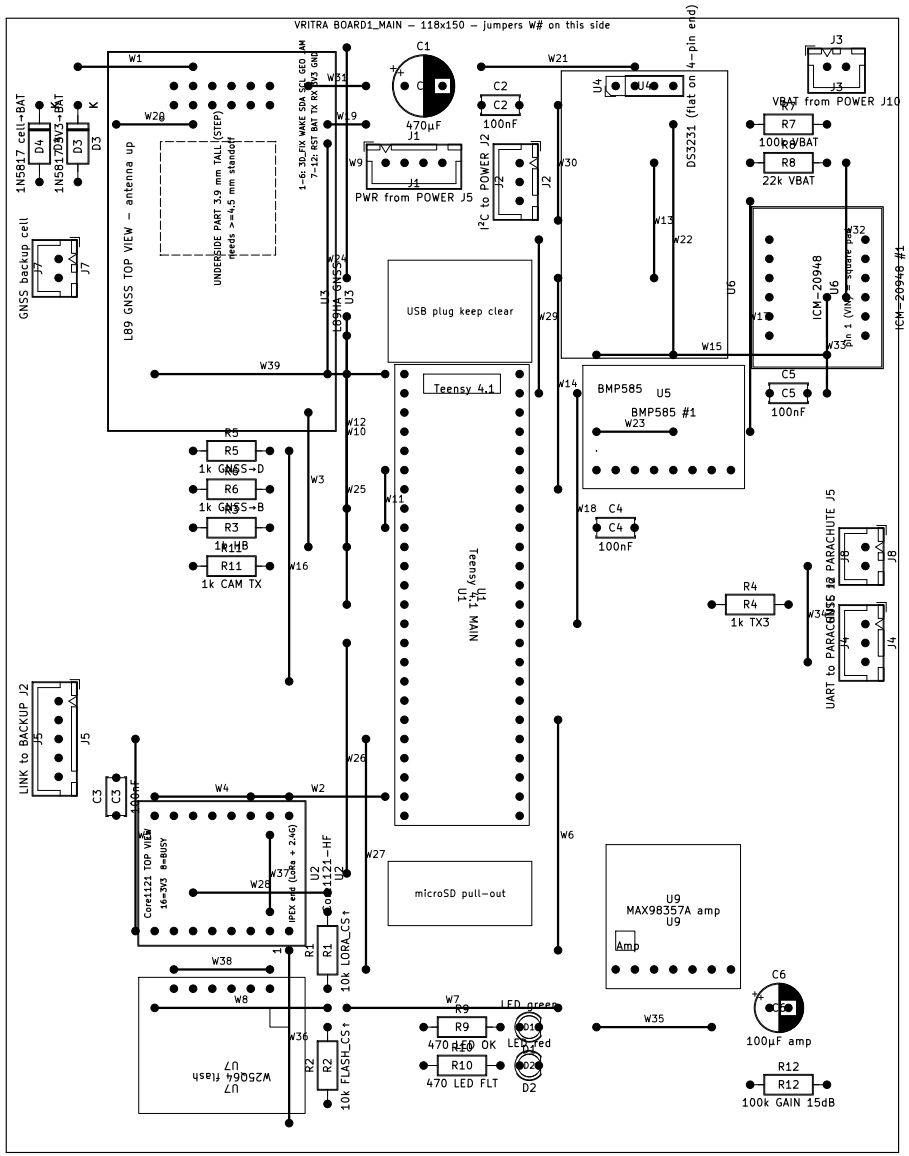

VRITRA BOARD1_MAIN — 118x150 — jumpers W# on this side
L89 GNSS TOP VIEW — antenna up
UNDERSIDE PART 3.9 mm TALL (STEP)
needs >=4.5 mm standoff
1-6: 3D_FIX WAKE SDA SCL GEO_AM
7-12: RST BAT TX RX 3V3 GND
LOCOSYS GNSS
USB plug keep clear
Teensy 4.1
Teensy 4.1 MAIN
BMP585
BMP585 #1
DS3231 (flat on 4-pin end)
ICM-20948
ICM-20948 #1
Pin 1 (VIN) square pad
microSD pull-out
MAX98357A amp
Amp
W25Q64 flash
Core1121 TOP VIEW
16×3V3 8×BUSY
IPEX end (LoRa + 2.4G)
PWR from POWER J5
I²C to POWER J2
VBAT from POWER J10
GNSS backup cell
LINK to BACKUP J2
UART to PARACHUTE J5
1N5817 cell→BAT
1N5817 3V3→BAT
1k GNSS→D
1k GNSS→B
1k HB
1k CAM TX
1k TX3
10k LORA_CS↑
10k FLASH_CS↑
470 LED OK
470 LED FLT
LED green
LED red
100nF
470µF
100µF amp
22k VBAT
100k GAIN 15dB