

Nature and Facilities Protector

A modular, solar-assisted IoT prototype exploring remote environmental monitoring, LoRaWAN telemetry, and early hazard indication across indoor, urban-outdoor, and forest settings.

Author: Mustafa Jweed Supervisor: Dr Stelios Neophytou Status: Academic prototype


Public-release boundary. This is a sanitized summary, not the raw thesis. Historical network credentials, device identifiers, service paths, and vendor figures have been excluded. The system is not a certified fire or gas alarm.

Problem and objective

The project investigated whether a low-power modular node could combine environmental and hazard-related sensors with long-range connectivity for places where continuous wired power or conventional internet access may be unavailable. Target scenarios included forests, industrial facilities, petrol or gas stations, and buildings with central heating or gas systems.

The prototype emphasized observation and early indication: collect environmental readings, encode them compactly, transmit them through LoRaWAN, decode them into readable values, store them for analysis, and optionally trigger alerts under an operator-defined policy.

Reference architecture

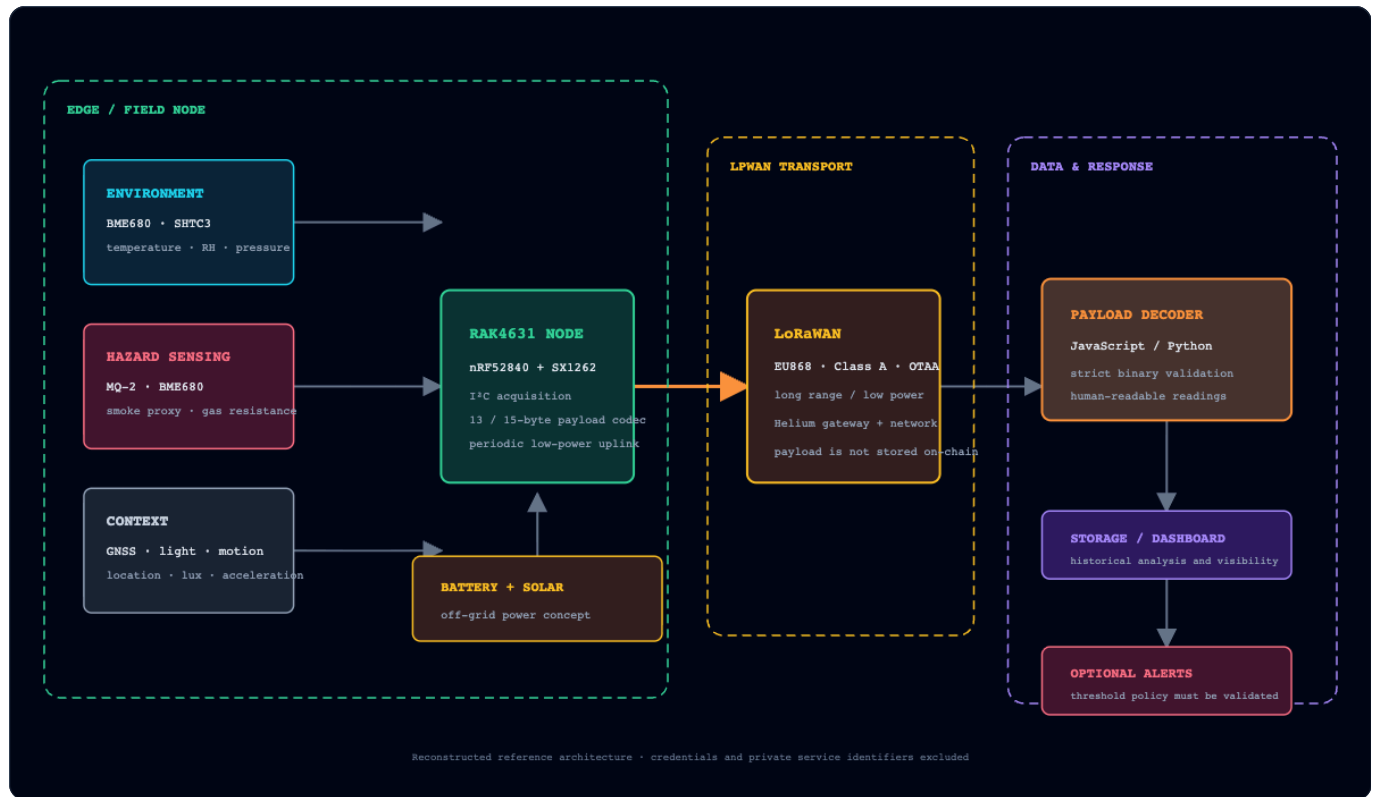

The Helium network provided LoRaWAN connectivity and blockchain-incentivized coverage. Environmental payloads were transported through the network; the project does not claim they were written to a blockchain.

The historical proof-of-integration continued through a JavaScript decoder, Google Forms/Sheets logging, a Python/Kivy display, and optional threshold-based SMS. Those cloud/UI artifacts are described here but not redistributed because they depended on private service-account configuration, Sheet identifiers, local paths, and personal notification details.

Prototype composition

Edge and power

RAK4631 / RAK4630 WisBlock core, modular baseboard, battery, and solar-assisted charging concept.

Environmental sensors

BME680, SHTC3, LPS22HB, OPT3001, LIS3DH, GNSS, and related modular interfaces.

Hazard indication

MQ-2 smoke/combustible-gas experimentation and an audible/visual local alarm path.

Data pipeline

Big-endian binary payload, LoRaWAN uplink, JavaScript decoding, historical storage/dashboard, and optional messaging integration.

Software reconstruction

The public repository supplies a credential-free reference firmware sketch, a shared C++ payload codec, matching Python and JavaScript decoders, a secret scanner, and hardware-independent tests. The codec preserves both frames found in the student working folder: a 13-byte historical packet and a 15-byte battery extension. Both use an unsigned centi-degree temperature field, so negative readings are rejected rather than wrapped.

OFFSET	BYTES	FIELD	SCALE
0	1	Environment message type	0x01
1	2	Temperature	unsigned ÷100 °C
3	2	Relative humidity	÷100 %
5	4	Pressure	÷100 hPa
9	4	Gas resistance	Ω
13	2	Optional battery extension	mV

Recorded evaluation summary

These ranges are observations reported in the 2024 student thesis. They are not independently certified sensor-performance results. The indoor 15% humidity row is dated differently from the surrounding rows and is retained only as an anomalous recorded entry.

ENVIRONMENT	TEMPERATURE	HUMIDITY	PRESSURE	GAS RESISTANCE
Indoor	36.81–38.03 °C	15–38%	973.64–976.11 hPa	99,191 Ω
Urban outdoor	47.87–47.91 °C	7%	980.41–980.49 hPa	3,458,210–3,716,250 Ω
Forest	14.43–14.46 °C	67%	1016.72–1016.78 hPa	190,015–205,712 Ω

Safe output evidence

```
sensor PPM Value is: 10.21
PPM percentage Value is:0.00%

*****

Getting Conversion Readings from ADC121C021

sensor PPM Value is: 10.15
PPM percentage Value is:0.00%

*****

Getting Conversion Readings from ADC121C021

sensor PPM Value is: 10.06
PPM percentage Value is:0.00%

*****

Getting Conversion Readings from ADC121C021

sensor PPM Value is: 9.99
PPM percentage Value is:0.00%

*****
```

Cropped serial-monitor output from the student bench test; source-code/editor panes and identifiers are excluded.

```
RH = 31.81% (checksum: pass), T = 26.42 deg C (checksum: pass)
RH = 31.65% (checksum: pass), T = 26.40 deg C (checksum: pass)
RH = 31.53% (checksum: pass), T = 26.38 deg C (checksum: pass)
RH = 31.48% (checksum: pass), T = 26.42 deg C (checksum: pass)
RH = 31.46% (checksum: pass), T = 26.39 deg C (checksum: pass)
RH = 31.45% (checksum: pass), T = 26.37 deg C (checksum: pass)
RH = 31.45% (checksum: pass), T = 26.43 deg C (checksum: pass)
RH = 31.41% (checksum: pass), T = 26.41 deg C (checksum: pass)
RH = 31.39% (checksum: pass), T = 26.43 deg C (checksum: pass)
RH = 31.36% (checksum: pass), T = 26.37 deg C (checksum: pass)
RH = 31.33% (checksum: pass), T = 26.42 deg C (checksum: pass)
RH = 31.25% (checksum: pass), T = 26.38 deg C (checksum: pass)
RH = 31.19% (checksum: pass), T = 26.41 deg C (checksum: pass)
RH = 31.14% (checksum: pass), T = 26.38 deg C (checksum: pass)
RH = 31.14% (checksum: pass), T = 26.42 deg C (checksum: pass)
RH = 31.08% (checksum: pass), T = 26.36 deg C (checksum: pass)
RH = 31.09% (checksum: pass), T = 26.38 deg C (checksum: pass)
RH = 31.05% (checksum: pass), T = 26.38 deg C (checksum: pass)
RH = 30.98% (checksum: pass), T = 26.35 deg C (checksum: pass)
RH = 30.94% (checksum: pass), T = 26.37 deg C (checksum: pass)
RH = 30.90% (checksum: pass), T = 26.35 deg C (checksum: pass)
RH = 30.89% (checksum: pass), T = 26.36 deg C (checksum: pass)
```

Cropped SHTC3 serial output with checksum validation; source-code/editor panes are excluded.

Limitations and future work

- The prototype was not certified against fire-alarm, gas-detection, or life-safety standards.
- Sensor thresholds and MQ-2 calibration require gas-specific laboratory validation.
- Recorded values came from limited student tests rather than a controlled long-duration study.
- LoRaWAN availability, latency, and alert delivery are dependent on gateway and backend coverage.
- Power optimization, enclosure/weather resistance, tamper protection, and secure device provisioning require further engineering.
- A production version should use encrypted credential provisioning, authenticated APIs, durable event storage, observability, and validated escalation policies.

Sanitized public case study generated from Mustafa Jweed's private 2024 final-year project. Vendor examples, private identifiers, and historical credentials are not redistributed.