


Assignment-4

Q. Create a pool on the DHCP Server router, named "xyz" and follow all the requirements.

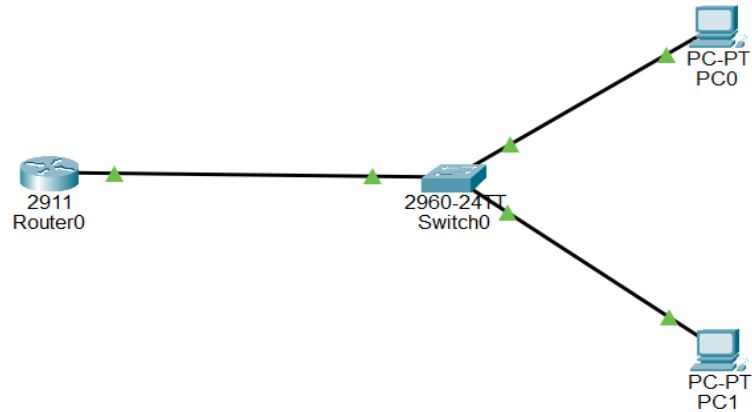

Router0

Physical Config CLI Attributes

IOS Command Line Interface

```
%Invalid interface type and number
Router(config)#interface Fa0/1
%Invalid interface type and number
Router(config)#interface Gig0/0
Router(config-if)#
Router(config-if)#interface Gig0/0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0,
changed state to up
exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Gig0/0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#ip dhcp pool xyz
Router(dhcp-config)#default-router 192.168.10.1
Router(dhcp-config)#dns-server 1.2.3.4
Router(dhcp-config)#lease 0 3
^
```

Copy Paste



PC1

PhysicalConfigDesktopProgrammingAttributes

IP ConfigurationX

InterfaceFastEthernet0

IP Configuration

☒ DHCP

☐ Static

DHCP request successful.

IPv4 Address

192.168.10.3

Subnet Mask

255.255.255.0

Default Gateway

192.168.10.1

DNS Server

1.2.3.4

IPv6 Configuration

☐ Automatic

☒ Static

IPv6 Address

/

Link Local Address

FE80::230:A3FF:FE19:8837

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication

MD5

Username

Password

☐ Top



PC0

Physical Config Desktop Programming Attributes

Command Prompt



Cisco Packet Tracer PC Command Line 1.0

C:\>ping 192.168.10.1

Pinging 192.168.10.1 with 32 bytes of data:

Reply from 192.168.10.1: bytes=32 time<1ms TTL=255

Reply from 192.168.10.1: bytes=32 time<1ms TTL=255

Reply from 192.168.10.1: bytes=32 time<1ms TTL=255

Reply from 192.168.10.1: bytes=32 time=1ms TTL=255

Ping statistics for 192.168.10.1:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.10.2

Pinging 192.168.10.2 with 32 bytes of data:

Reply from 192.168.10.2: bytes=32 time=11ms TTL=128

Reply from 192.168.10.2: bytes=32 time=7ms TTL=128

Reply from 192.168.10.2: bytes=32 time=7ms TTL=128

Reply from 192.168.10.2: bytes=32 time=3ms TTL=128

Ping statistics for 192.168.10.2:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 3ms, Maximum = 11ms, Average = 7ms

C:\>