


ASSIGNMENT-3

Q1. Connect one PC with another PC



```
PC0
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2



Pinging 192.168.1.2 with 32 bytes of data:


Reply from 192.168.1.2: bytes=32 time=1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms


C:\>
```

Q2. Connect a Pc with a router.

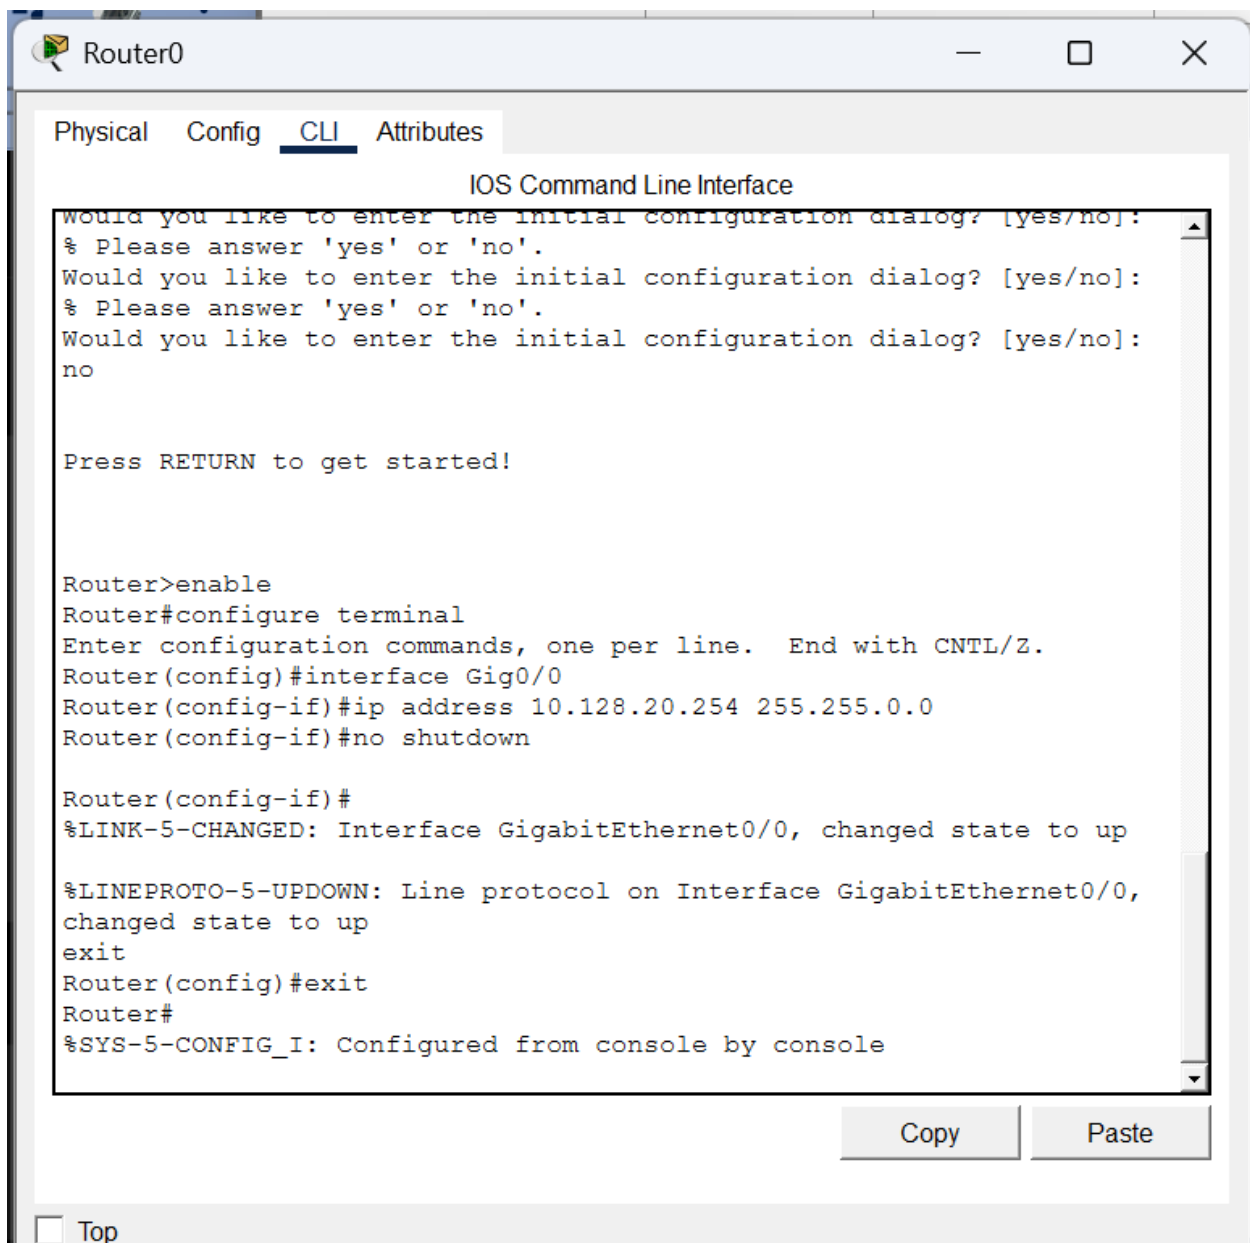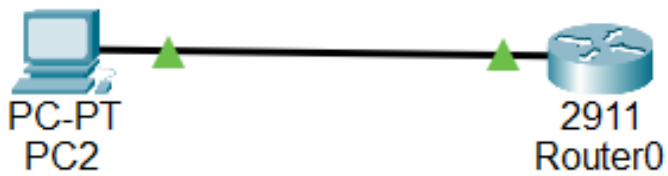

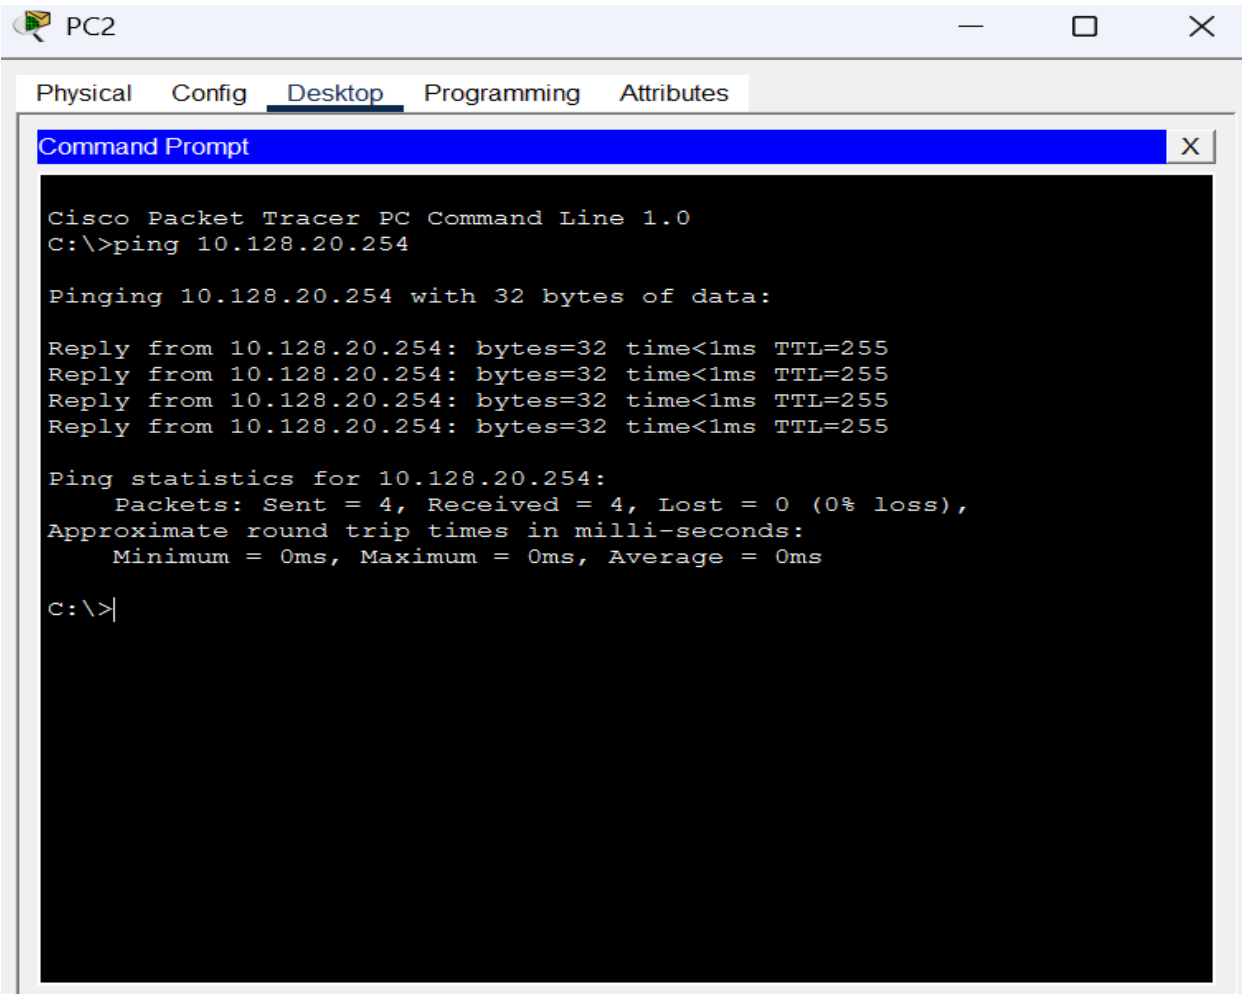

Q3. Create a network of 2 PCs as below.

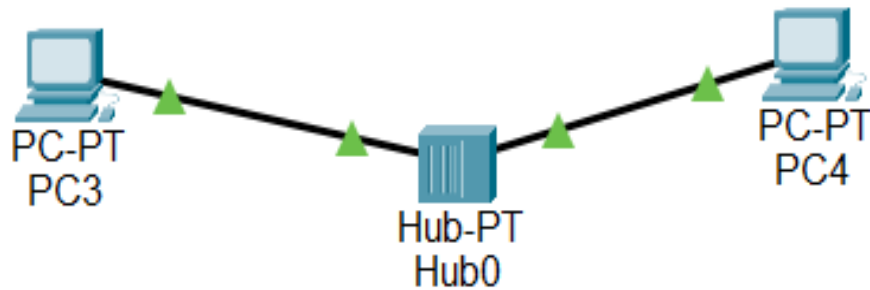

The screenshot shows a window titled "PC3" with tabs for "Physical", "Config", "Desktop", "Programming", and "Attributes". The "Desktop" tab is active, displaying a "Command Prompt" window. The command prompt shows the execution of a ping command to 192.168.2.2, resulting in four successful replies with 0% loss.

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.2

Pinging 192.168.2.2 with 32 bytes of data:


Reply from 192.168.2.2: bytes=32 time<1ms TTL=128
Reply from 192.168.2.2: bytes=32 time<1ms TTL=128
Reply from 192.168.2.2: bytes=32 time<1ms TTL=128
Reply from 192.168.2.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.2.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

At the bottom of the window, there is a "Top" button and a status bar showing "Time: 00:11:27 (0/127)".

Q4. Connect a 2Pc with a Switch below.

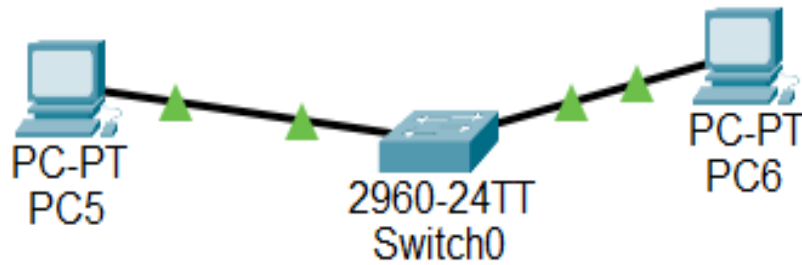

PC5

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.3.2

Pinging 192.168.3.2 with 32 bytes of data:


Reply from 192.168.3.2: bytes=32 time<1ms TTL=128
Reply from 192.168.3.2: bytes=32 time<1ms TTL=128
Reply from 192.168.3.2: bytes=32 time<1ms TTL=128
Reply from 192.168.3.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.3.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

☐ Top

Q5. Create BUS topologies as below.

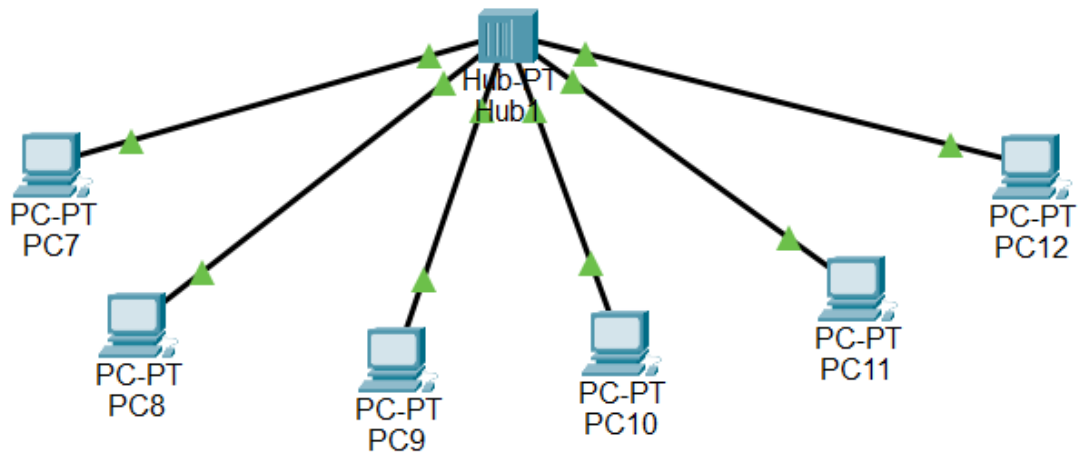

PC7

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.4.6

Pinging 192.168.4.6 with 32 bytes of data:


Reply from 192.168.4.6: bytes=32 time<1ms TTL=128
Reply from 192.168.4.6: bytes=32 time=1ms TTL=128
Reply from 192.168.4.6: bytes=32 time<1ms TTL=128
Reply from 192.168.4.6: bytes=32 time=10ms TTL=128

Ping statistics for 192.168.4.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 2ms

C:\>
```

☐ Top

b.)

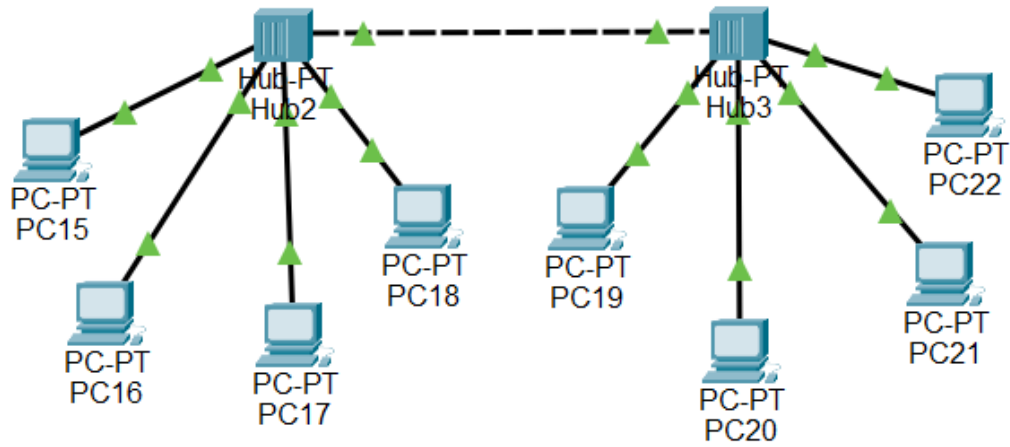

PC15

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.5.6


Pinging 192.168.5.6 with 32 bytes of data:


Reply from 192.168.5.6: bytes=32 time<1ms TTL=128
Reply from 192.168.5.6: bytes=32 time<1ms TTL=128
Reply from 192.168.5.6: bytes=32 time<1ms TTL=128
Reply from 192.168.5.6: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.5.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Q6. Create a Ring topology

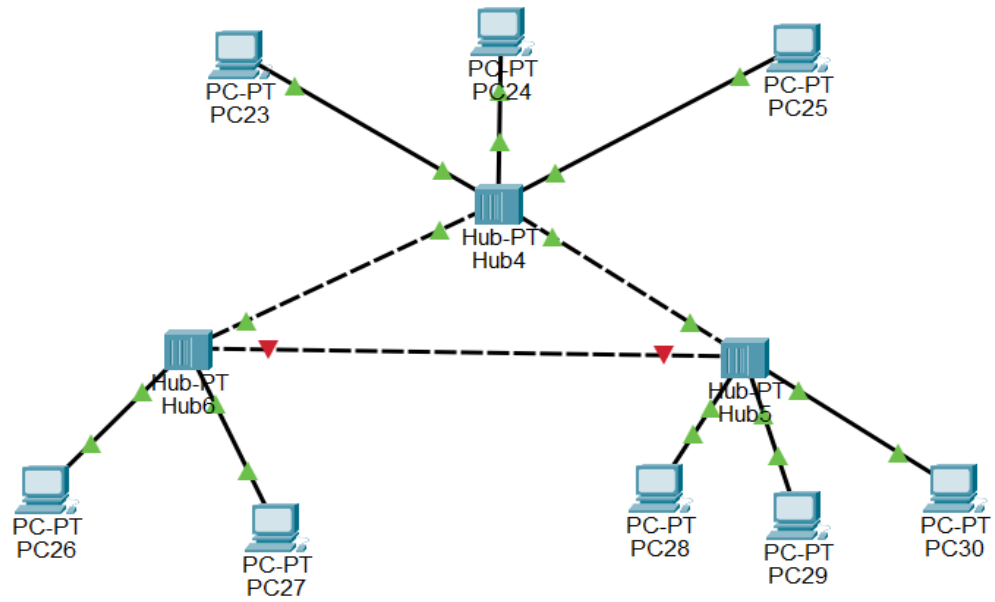

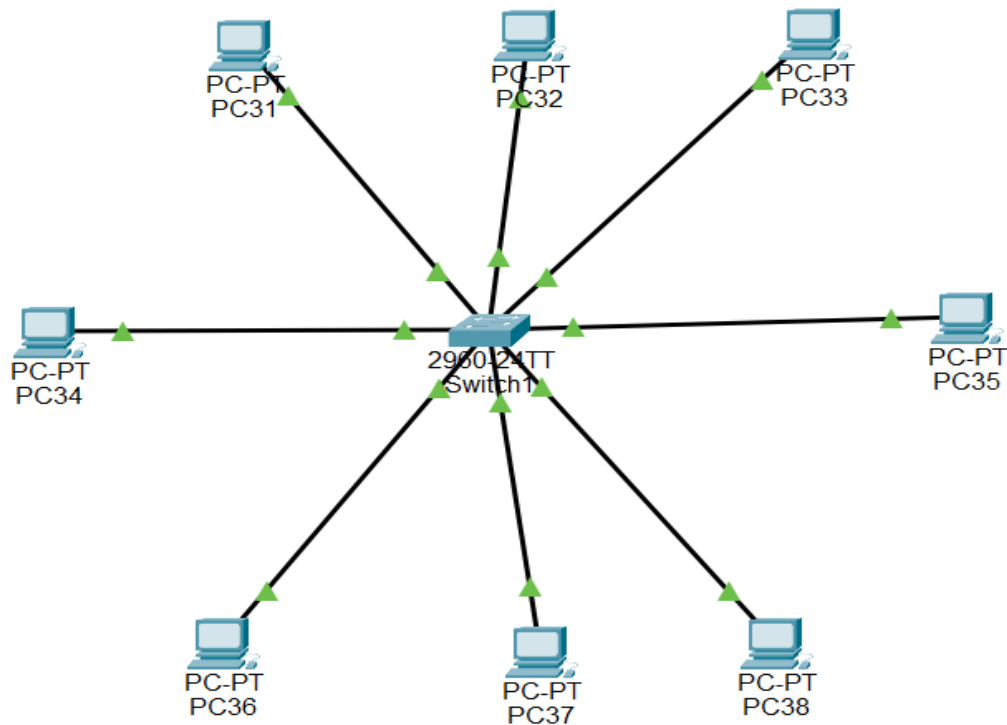

```
PC34
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.7.6

Pinging 192.168.7.6 with 32 bytes of data:

Reply from 192.168.7.6: bytes=32 time<1ms TTL=128
Reply from 192.168.7.6: bytes=32 time=3ms TTL=128
Reply from 192.168.7.6: bytes=32 time<1ms TTL=128
Reply from 192.168.7.6: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.7.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 3ms, Average = 1ms

C:\>|
```

Q7. Create a Tree Topology

