Table Of Contents, & Revision History	Page 1
System Controller Block Diagram #1	Page 2
System Controller Block Diagram #2	Page 3
GEODE / SO-DIMM	Page 4
GEODE / Console Board Interface	Page 5
GEODE PCI Bus	Page 6
GEODE Power Pins / Decoupling	Page 7
5536 / PCI Slot / LAN Slot	Page 8
5536 / Compact Flash / IDE / System BIOS	Page 9
5536 Power Pins / Clock Generator / Battery	Page 10
AC97 / Amplifier	Page 11
USB Ports	Page 12
Power Supplies, Reset	Page 13
Peripheral Controller - USB / VF / Service Switch	Page 14
Peripheral Controller - ARM CPU	Page 15
Peripheral Controller - Printhead Connectors	Page 16
Peripheral Controller - Stepper Motor Driver	Page 17
Peripheral Controller - Fan / Label Taken Sensor	Page 18
Peripheral Controller - Media Sensor	Page 19
Peripheral Controller - Serial EEP / Power Sense	Page 20
Peripheral Controller - A/D Circuit	Page 21
Board Stack-Up	Page 22

⊕ ADD ⊖ SUBTRACT ● WAS

LTR	REVISION	ZONE	DATE	CH NO.
B	RELEASED TO PRODUCTION		02-09-07	2022114
C	Changed R251 & R252 to 33.2 ohms Changed L4 & L6 to 6.8uH	5-C3 13-B6	04-12-07	2022163
	Changed pushbutton functionality to power button	13-B2		

IBIS Models used for simulations

LX800 - 33233_lx.ibs
5536 - 40144a_cs5536_b1.ibs
MK1491 - mk149_09.ibs
Memory - MT8VDDT3264HDG-40bF4.ebd

ISSUE LIST FROM REFERENCE DESIGN

DCC DS

DRAWING STATUS

STATUS

SUPERSEDED BY

FOR SERVICE USE


THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART.
NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.

HOBART

NAME: SCH, LXSCALE MAIN BOARD

SUBCIRCUIT

VIEWDRAW PROJECT	HLX SCALE	FIRST USED ON	HLX SCALE
VIEWDRAW FILENAME	444635C		
REF. ASSEMBLY NUMBER	00-444635	REF. PCB NUMBER	00-444634
DWN BY: J. DUSING	DATE: 04-10-07	LAST UPDATE	4-12-2007_10:55
CHK BY: M. EBERHARDT	DATE: 04-11-07	DEV DWG	
	SIZE: C	DRAWING NO: 00-444633	SHEET: 1 OF 22 / REV: C

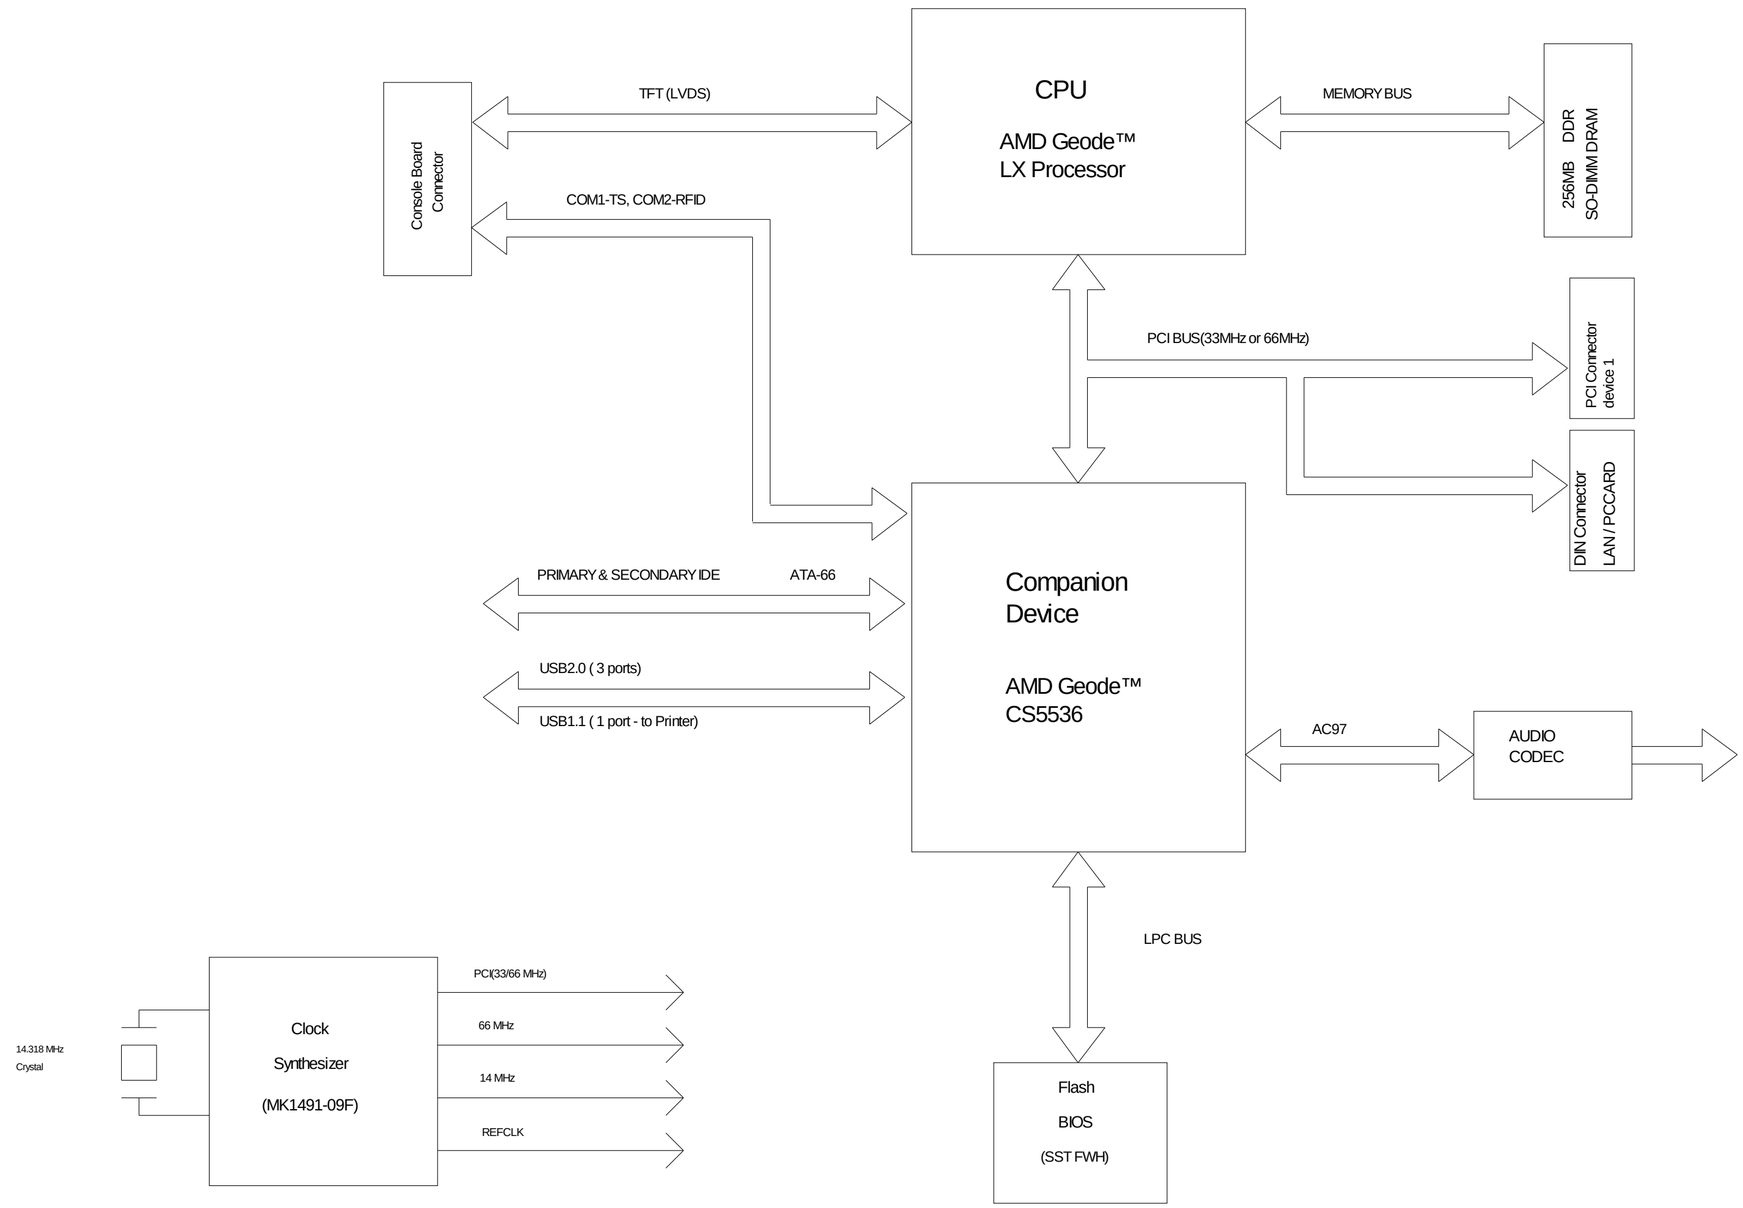


THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.

HOBART

NAME: SCH, LXSCALE MAIN BOARD			
SUBCIRCUIT: System Controller Block Diagram #1			
VIEWLOGIC PROJECT: HLX_SCALE		FIRST USED ON: HLX_SCALE	
VIEWLOGIC FILENAME: 444635C		DCC: DS	
REF. ASSEMBLY NUMBER: 00-444635		REF. PCB NUMBER: 00-444634	
DWN BY: J. DUSING	DATE: 04-10-07	LAST UPDATE: 4-12-2007_10:55	
CHK BY: M. EBERHARDT	DATE: 04-11-07	DEV DWG	
	SIZE: C	DRAWING NO: 00-444633	SHEET: 2 OF 22 / REV: C

LED Assignments		
D7	USB Power Internal	Green
D8	+5V Power	Green
D9	Peripheral Error	Green
D13	Reset	Red
D17	USB Power External	Green
D19	IDE Activity	Green


PCI MASTER SETTING

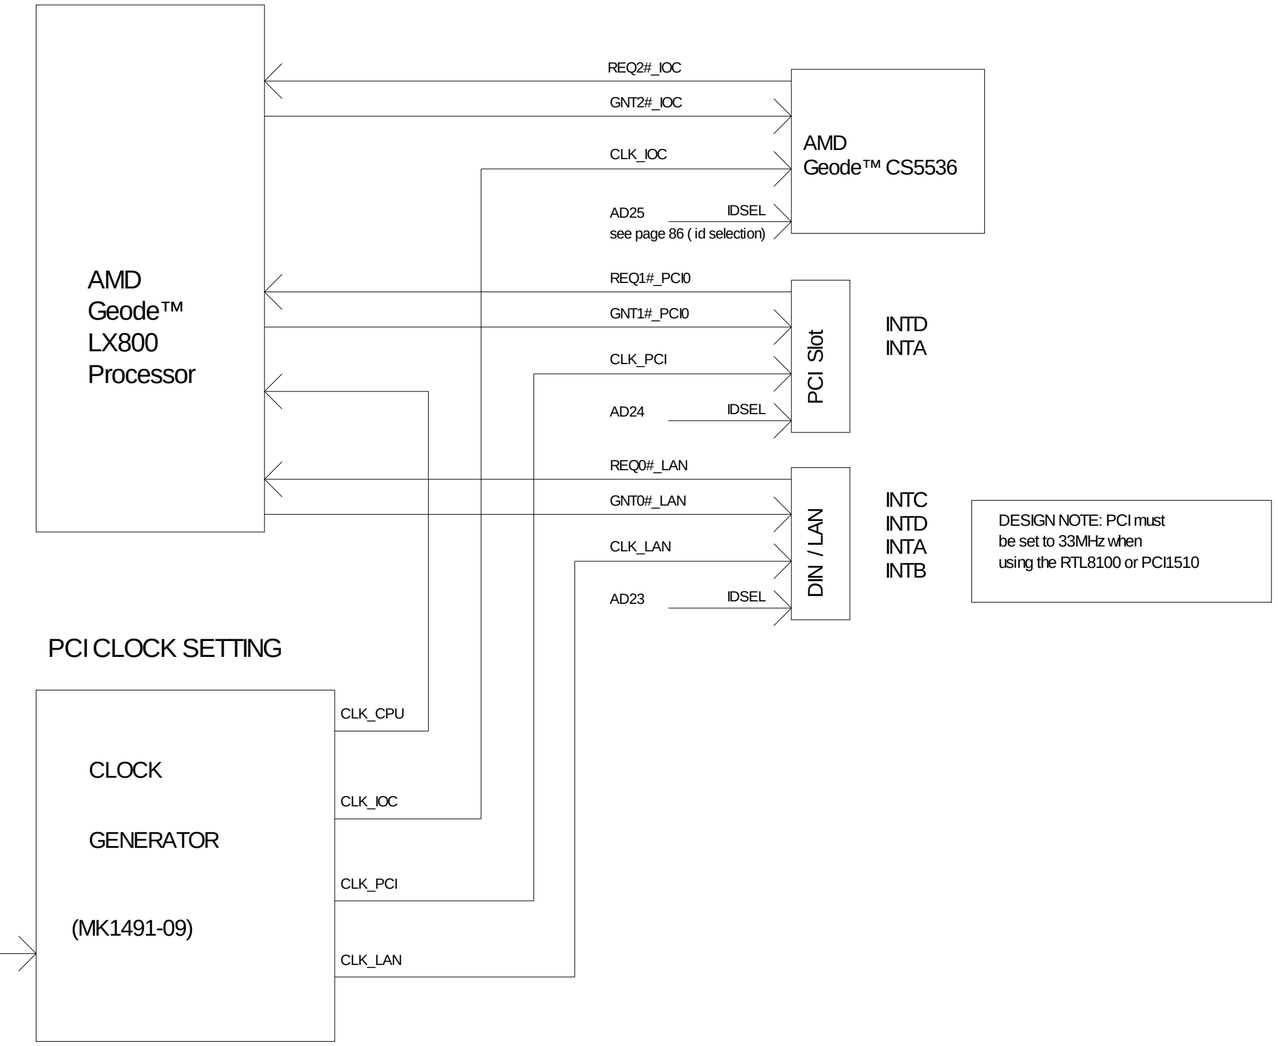


DESIGN NOTE: PCI must be set to 33MHz when using the RTL8100 or PCI1510

PCI CLOCK SETTING

SEL66_33#	Function
1	PCI 66 MHz
0	PCI 33 MHz

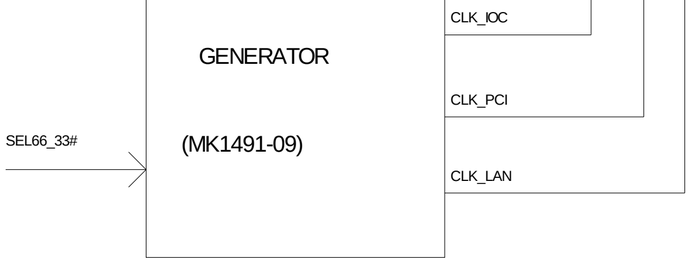

JTAG DAISY CHAIN MODE WITH AMD GEODE™ CS5536 COMPANION DEVICE

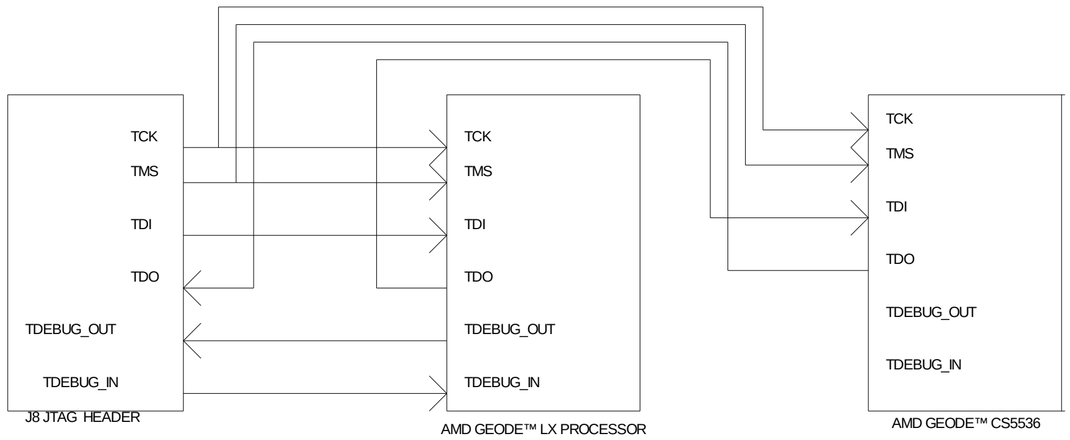


THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.

HOBART

NAME: SCH, LXSCALE MAIN BOARD

SUBCIRCUIT: System Controller Block Diagram #2

VIEWLOGIC PROJECT: HLX SCALE	FIRST USED ON: HLX SCALE
VIEWLOGIC FILENAME: 444635C	DCC: DS
REF. ASSEMBLY NUMBER: 00-444635	REF. PCB NUMBER: 00-444634
DWN BY: J. DUSING — DATE: 04-10-07	LAST UPDATE: 4-12-2007_10:55
CHK BY: M. EBERHARDT — DATE: 04-11-07	DEV DWG:
SIZE: C — DRAWING NO: 00-444633	SHEET: 3 OF 22 — REV: C

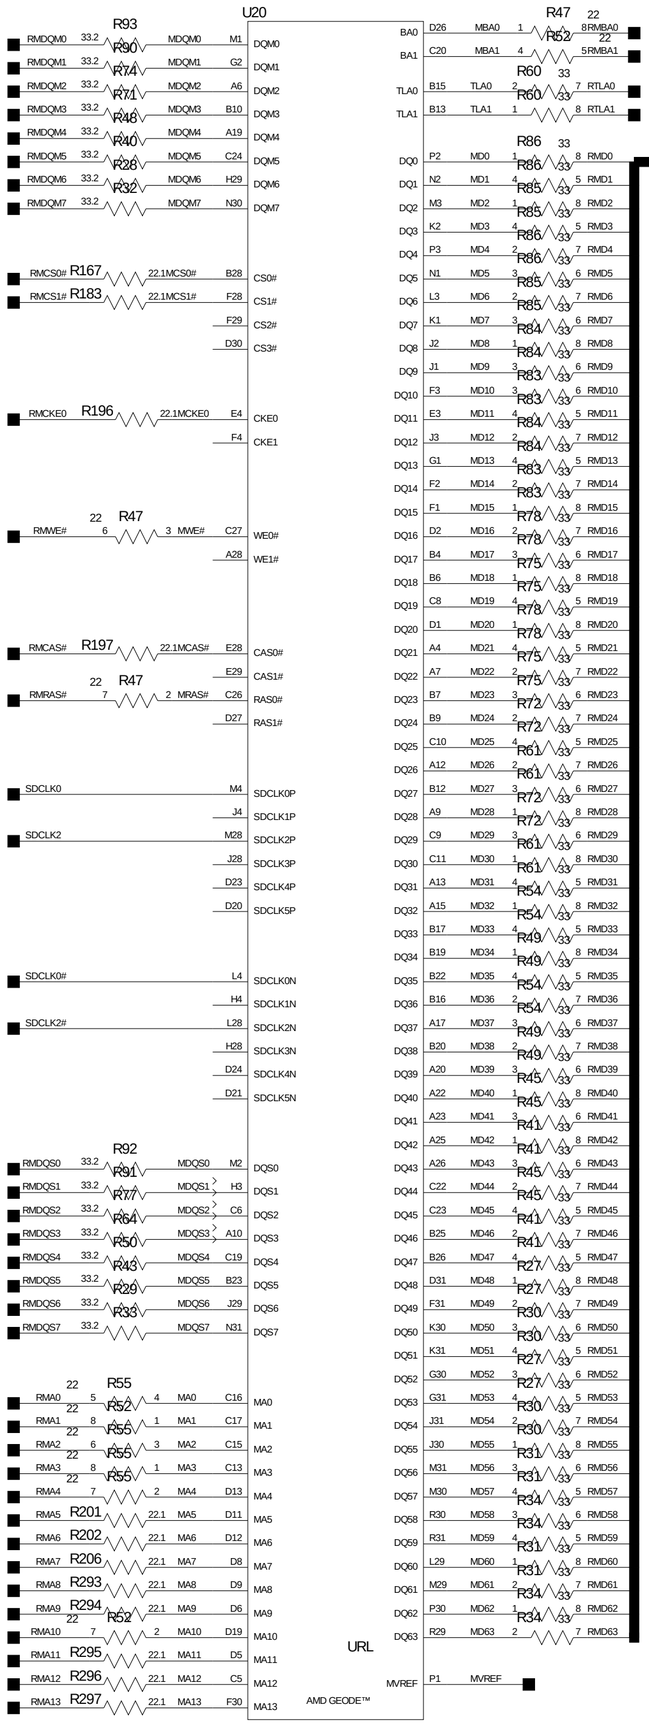

THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.

HOBART


NAME: SCH, LXSCALE MAIN BOARD

SUBCIRCUIT: GEODE / SO-DIMM

VIEWLOGIC PROJECT: HLX_SCALE	FIRST USED ON: HLX_SCALE
VIEWLOGIC FILENAME: 444635C	DCC: DS
REF: ASSEMBLY NUMBER: 00-444635	REF: PCB NUMBER: 00-444634
DWN BY: J. DUSING	DATE: 04-10-07
CHK BY: M. EBERHARDT	DATE: 04-11-07
	LAST UPDATE: 4-12-2007_10:55
	DEV DWG:


SIZE	DRAWING NO	SHEET	REV
C	00-444633	4 OF 22	C

COMM1 - UART1 - Touchscreen
COMM2 - UART2 - RFID
Vt+ max=2.31V @ VCC=3.3V

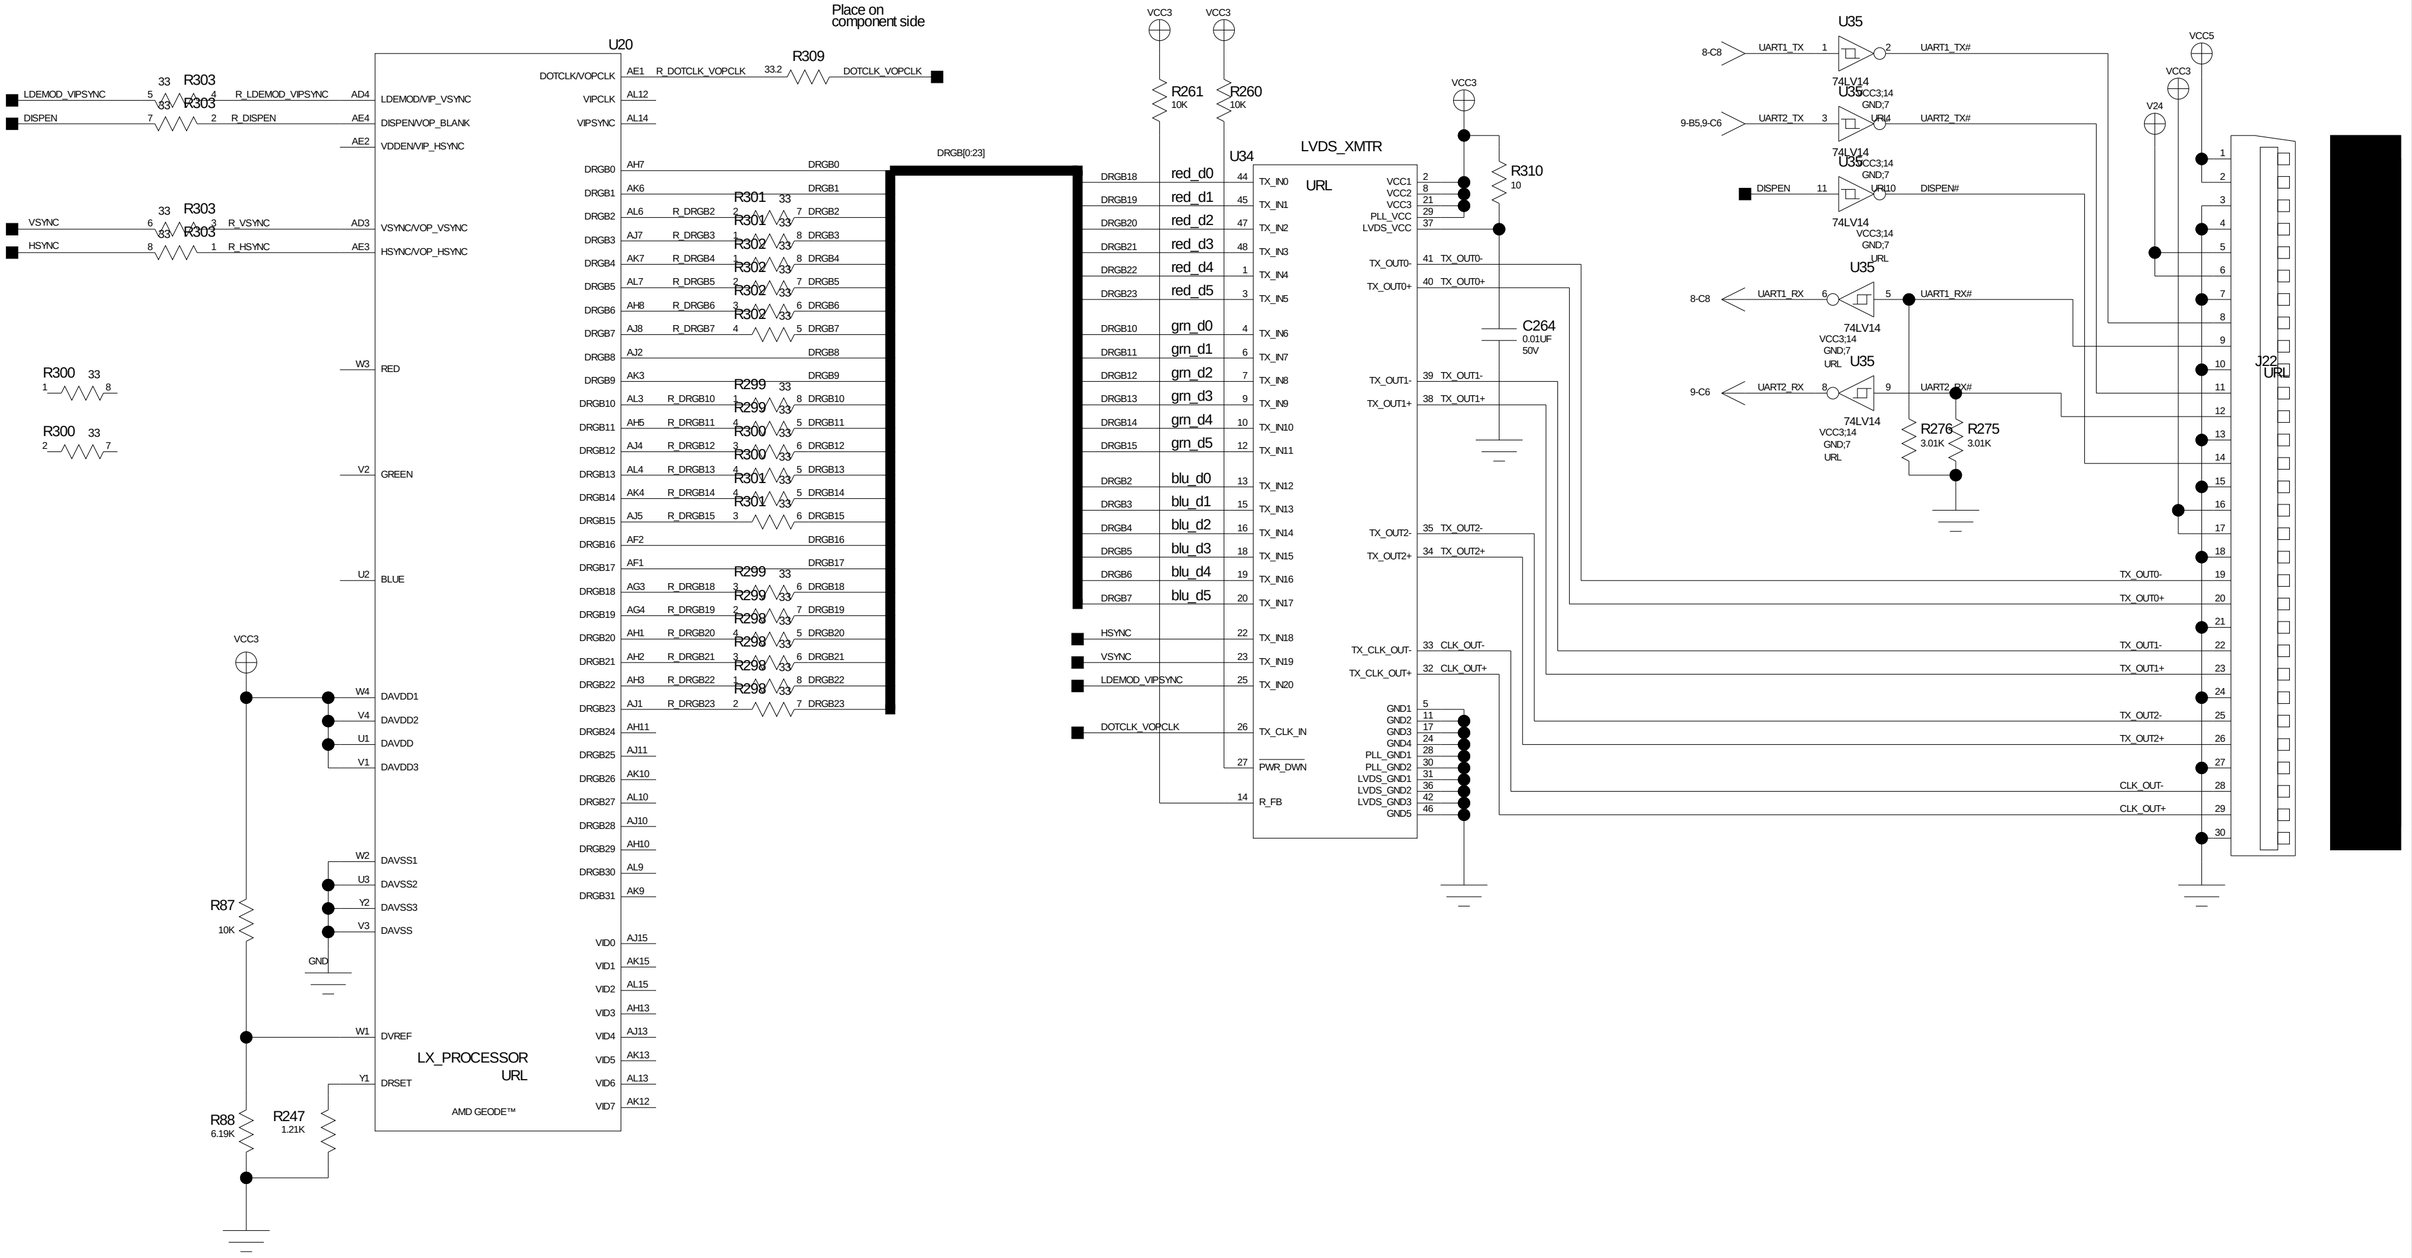


THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.


HOBART			
NAME: SCH, LXSCALE MAIN BOARD			
SUBCIRCUIT: GEODE / Console Board Interface			
VIEWLOGIC PROJECT: HLX_SCALE		FIRST USED ON: HLX_SCALE	
VIEWLOGIC FILENAME: 444635C		DCC: DS	
REF: ASSEMBLY NUMBER: 00-444635		REF: PCB NUMBER: 00-444634	
DWN BY: J. DUSING	DATE: 04-10-07	LAST UPDATE: 4-12-2007_10:55	
CHK BY: M. EBERHARDT	DATE: 04-11-07	DEV DWG	
	SIZE: C	DRAWING NO: 00-444633	SHEET: 5 OF 22 / REV: C

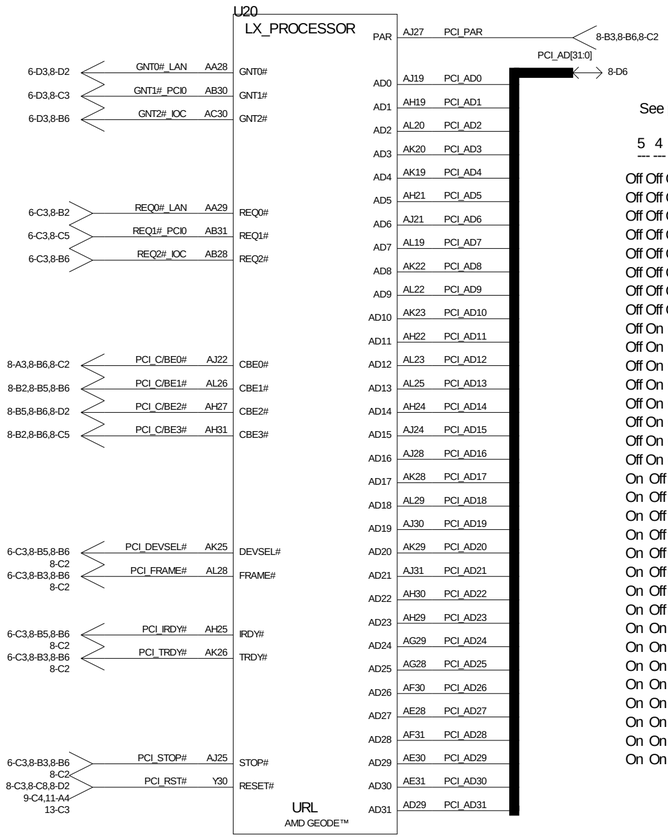



See pg. 552 of Geode book

5	4	3	2	1	CORE	MEM
Off	Off	Off	Off	Off	600	400
Off	Off	Off	Off	On	600	333
Off	Off	Off	On	Off	566	400
Off	Off	Off	On	On	566	333
Off	Off	On	Off	Off	566	266
Off	Off	On	Off	On	533	400
Off	Off	On	On	Off	533	333
Off	Off	On	On	On	533	266
Off	On	Off	Off	Off	500	400
Off	On	Off	Off	On	500	333
Off	On	Off	On	Off	500	266
Off	On	Off	On	On	466	400
Off	On	On	Off	Off	466	333
Off	On	On	Off	On	466	266
Off	On	On	On	Off	433	400
Off	On	On	On	On	433	333
On	Off	Off	Off	Off	433	266
On	Off	Off	Off	On	400	400
On	Off	Off	On	Off	400	333
On	Off	Off	On	On	400	266
On	Off	On	Off	Off	400	200
On	Off	On	Off	On	366	333
On	Off	On	On	Off	366	266
On	Off	On	On	On	366	200
On	On	Off	Off	Off	333	333
On	On	Off	Off	On	333	266
On	On	Off	On	Off	333	200
On	On	Off	On	On	266	266
On	On	On	Off	Off	266	200
On	On	On	Off	On	200	200
On	On	On	On	Off	166	166
On	On	On	On	On	Bypass	Bypass

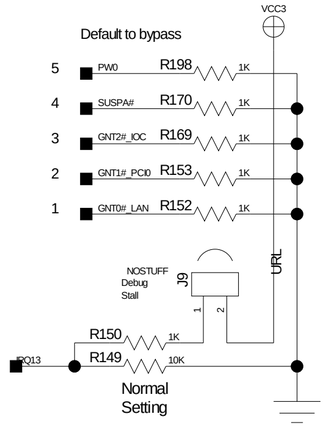




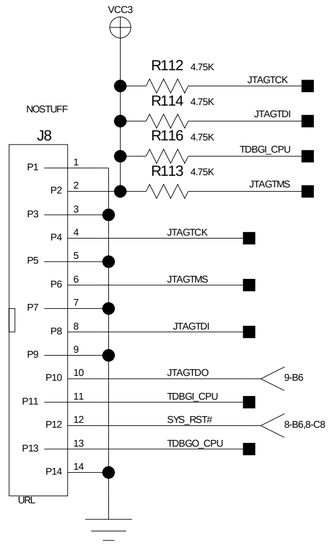


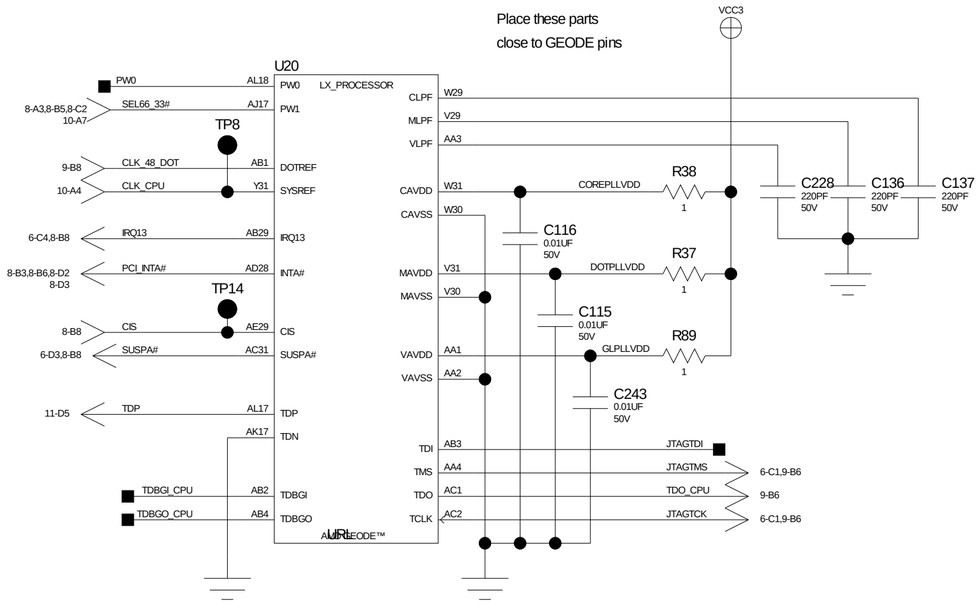

THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.

HOBART			
NAME: SCH, LXSCALE MAIN BOARD			
SUBCIRCUIT: GEODE PCI Bus			
VIEWLOGIC PROJECT: HLX_SCALE		FIRST USED ON: HLX_SCALE	
VIEWLOGIC FILENAME: 444635C		DCC: DS	
REF. ASSEMBLY NUMBER: 00-444635		REF. PCB NUMBER: 00-444634	
DWN BY: J. DUSING	DATE: 04-10-07	LAST UPDATE: 4-12-2007_10:55	
CHK BY: M. EBERHARDT	DATE: 04-11-07	DEV DWG:	
	SIZE: C	DRAWING NO: 00-444633	SHEET: 6 OF 22 / REV: C

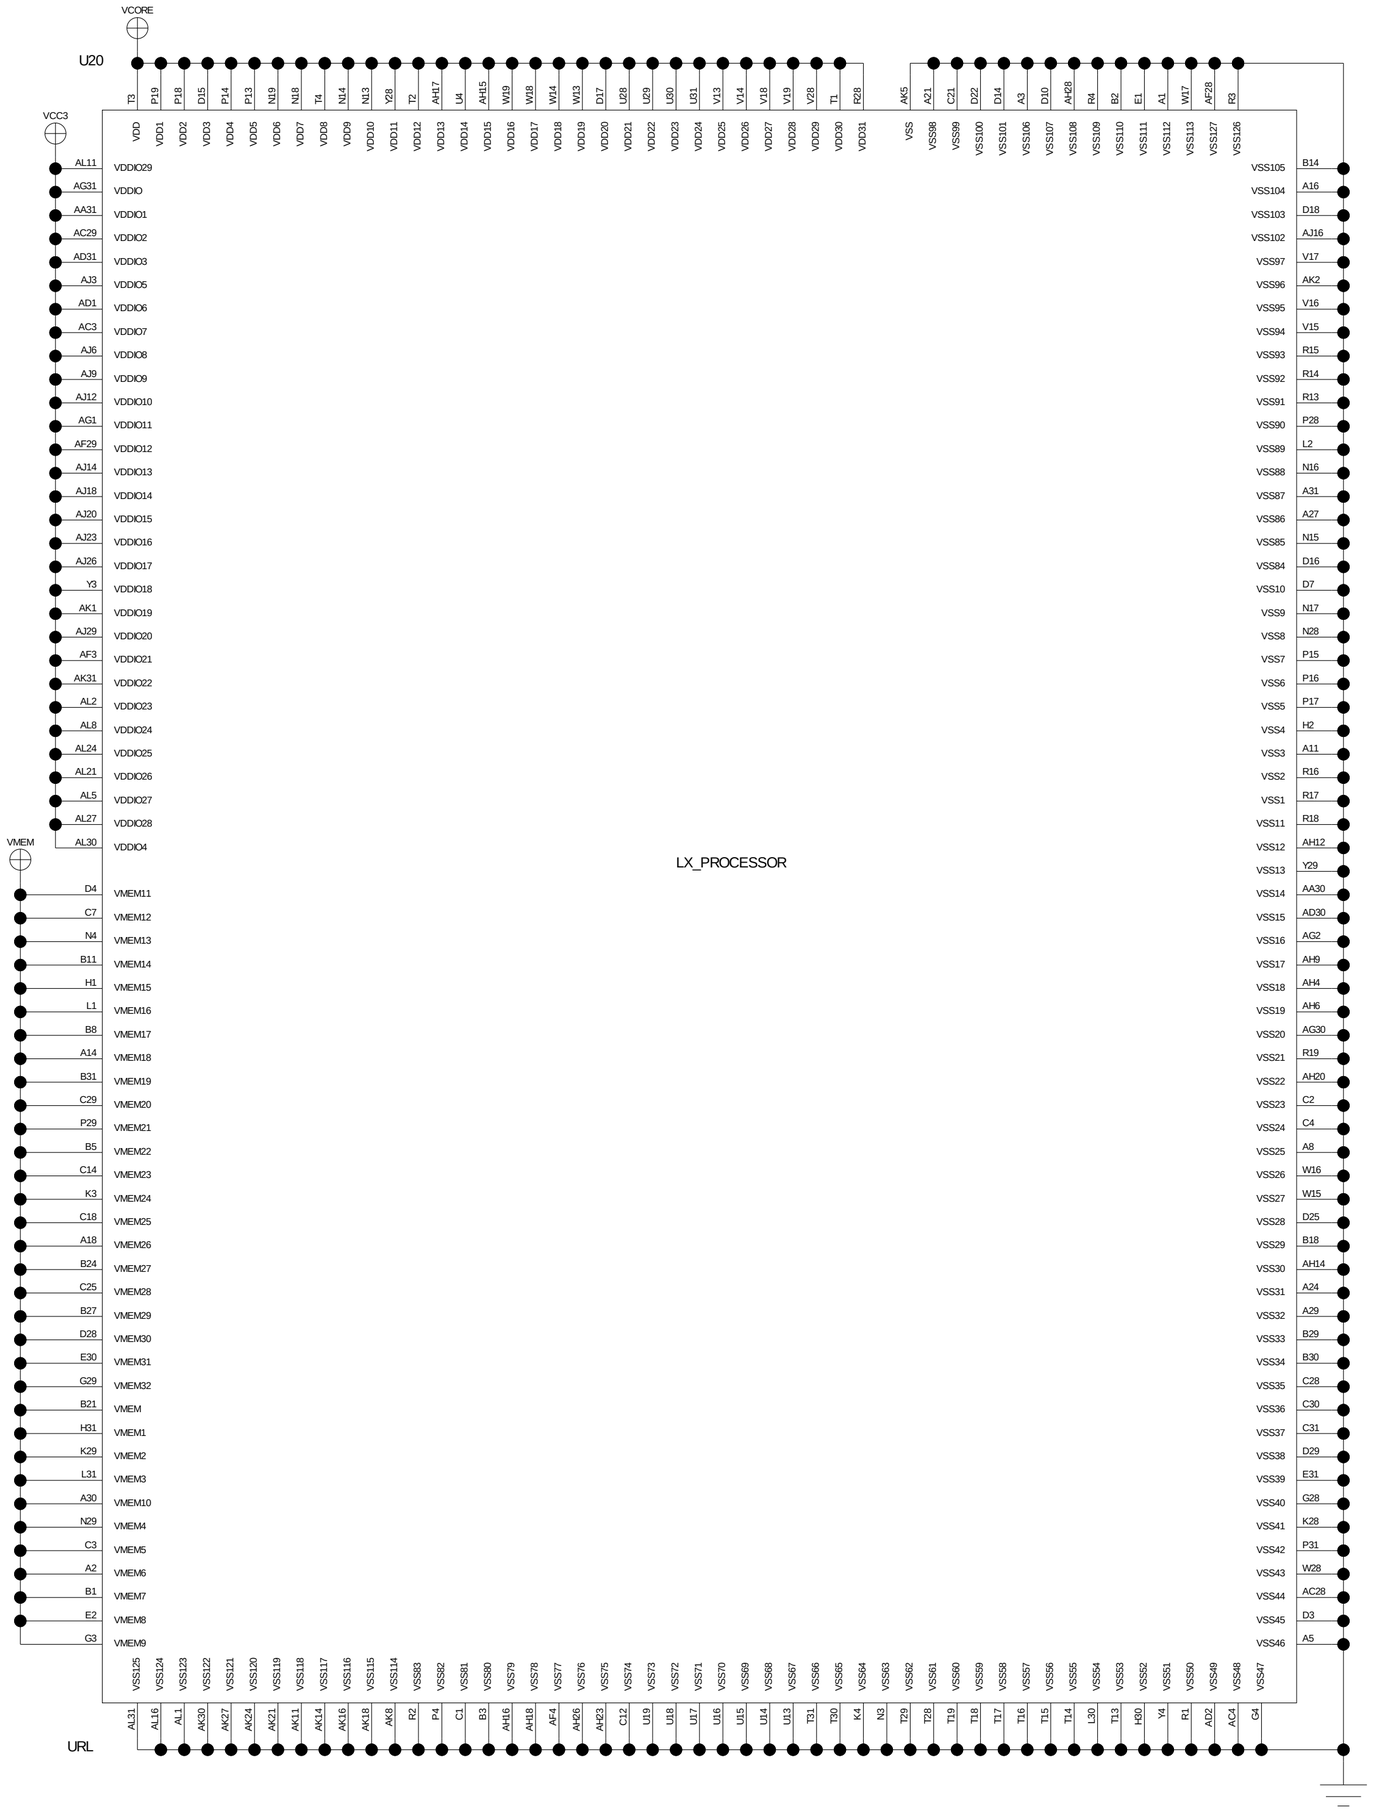

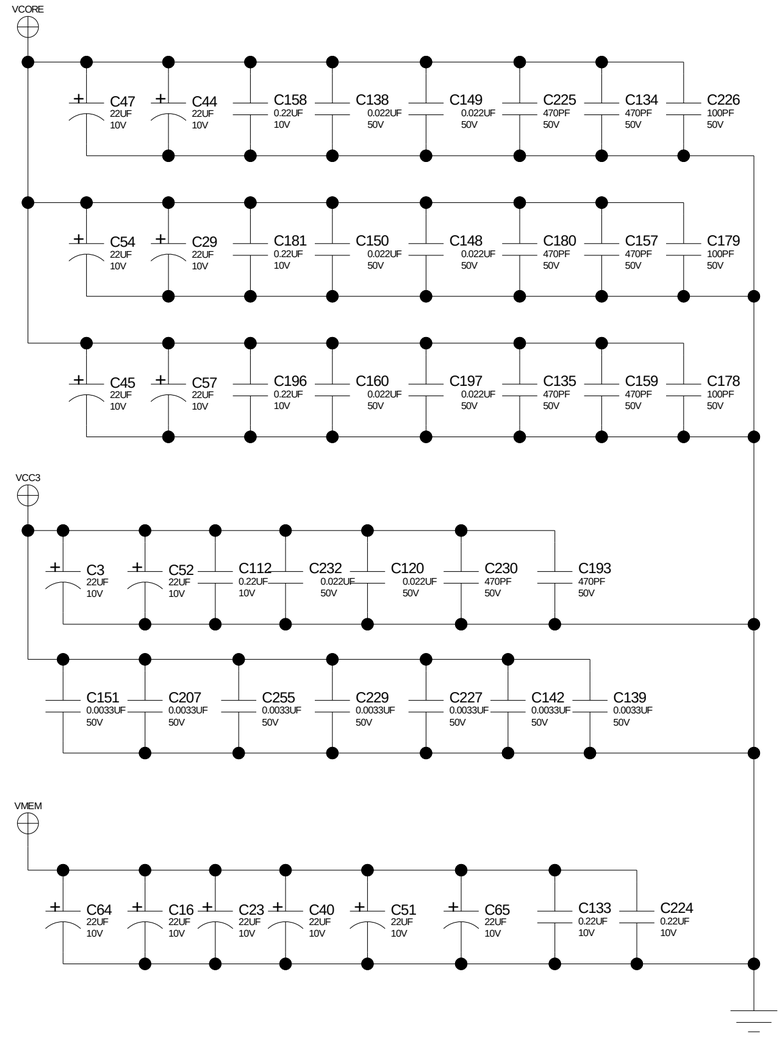

THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.

HOBART

NAME: SCH, LXSCALE MAIN BOARD

SUBCIRCUIT: GEODE Power Pins / Decoupling

VIEWLOGIC PROJECT: HLX_SCALE	FIRST USED ON: HLX_SCALE
VIEWLOGIC FILENAME: 444635C	DCC: DS
REF. ASSEMBLY NUMBER: 00-444635	REF. PCB NUMBER: 00-444634
DWN BY: J. DUSING	DATE: 04-10-07
CHK BY: M. EBERHARDT	DATE: 04-11-07
	LAST UPDATE: 4-12-2007_10:55
	DEV DWG:
SIZE: C	DRAWING NO: 00-444633
SHEET: 7 OF 22	REV: C

SLOT 3

SLOT 1

PCI_AD[31:0]

U23

AMD GEODE™ COMPANION DEVICE

CS5536 URL

10-A4	CLK_IOC	U4	PCI_CLK	AD0	R17 PCI_AD0
				AD1	T17 PCI_AD1
				AD2	R16 PCI_AD2
				AD3	T16 PCI_AD3
				AD4	P16 PCI_AD4
				AD5	T15 PCI_AD5
				AD6	R15 PCI_AD6
				AD7	P15 PCI_AD7
				AD8	T14 PCI_AD8
				AD9	R14 PCI_AD9
				AD10	U13 PCI_AD10
				AD11	T13 PCI_AD11
				AD12	R13 PCI_AD12
				AD13	U12 PCI_AD13
				AD14	T12 PCI_AD14
				AD15	R12 PCI_AD15
				AD16	U8 PCI_AD16
				AD17	T8 PCI_AD17
				AD18	R8 PCI_AD18
				AD19	U7 PCI_AD19
				AD20	T7 PCI_AD20
				AD21	R7 PCI_AD21
				AD22	U6 PCI_AD22
				AD23	T6 PCI_AD23
				AD24	U5 PCI_AD24
				AD25	T5 PCI_AD25
				AD26	R5 PCI_AD26
				AD27	T4 PCI_AD27
				AD28	R4 PCI_AD28
				AD29	U3 PCI_AD29
				AD30	T3 PCI_AD30
				AD31	U1 PCI_AD31
	PWRBTN#	A8	PWR_BUT#		
9-B4,9-C2	IDE_CABLEID	D3	GPIO5		
		D2	GPIO6		
8-B3,8-D5	PCI_INTB#	C2	GPIO7		
5-D3	UART1_TX	E3	UART1_TX		
5-D3	UART1_RX	D1	UART1_RX		
11-C8	SMB_ALERT#	C3	THRM_ALRM#		
		A1	SLP_CLK_EN#		
		C9	WORK_AUX		
	LOW_BAT#	A9	LOW_BAT#		
	PCI_PME#	B7	GPIO26		
	MFGPT7_C1	C8	32KHZ		
	PCI_INTD#	F2	GPIO13		
	PCI_INTC#	J3	GPIO12		
6-C8,8-C3,8-D2 9-C4,11-A4 13-C3	PCI_RST#	A5	RESET_OUT#		
	RST_STB#	B8	RESET_STAND#		
6-B1,8-B6	SYS_RST#	C6	RESET_WORK#		
6-B8	CIS	P3	SUSP#/CIS		
6-B8,6-D3	SUSPA#	N1	SUSPA#		
6-B8,6-C4	IRQ13	K2	IRQ13		
10-B4	CLK_14_IOC	C1	MHZ14_CLK		
	RTCXIN	A4	KHZ32_XCI		
	RTCXOUT	B3	KHZ32_XCO		
		G15	USB_PTEST		
	TEST_MODE	A6	TEST_MODE		
		B9	LVD_TEST		
	FUNC_TEST	F3	FUNC_TEST		
				PAR	U10 PCI_PAR
				C/BE0#	U14 PCI_C/BE0#
				C/BE1#	U11 PCI_C/BE1#
				C/BE2#	T9 PCI_C/BE2#
				C/BE3#	R6 PCI_C/BE3#
				FRAME#	U9 PCI_FRAME#
				IRDY#	R10 PCI_IRDY#
				DEVSEL#	R11 PCI_DEVSEL#
				TRDY#	T10 PCI_TRDY#
				GPIO0	R2 PCI_INTA#
				STOP#	T11 PCI_STOP#
				GNT#	R1 GNT2#_IOC
				REQ#	T1 REQ2#_IOC

6-D6 6-D6,8-B3,8-C2 6-C8,8-A3,8-C2 6-C8,8-B2,8-B5 6-C8,8-B5,8-D2 6-C8,8-B2,8-C5 6-C3,6-C8,8-B3 8-C2 6-C3,6-C8,8-B5 8-C2 6-C3,6-C8,8-B5 8-C2 6-C3,6-C8,8-B3 8-C2 6-B8,8-B3,8-D2 8-D3 6-C3,6-C8,8-B3 8-C2 6-D3,6-D8 6-C3,6-D8

J5

B1	PCI_INTD#	A1	PCI_INTC#
B2	PCI_INTB#	A2	PCI_INTA#
B3	PRSNT1#	A3	
B4	PRSNT2#	A4	
B5		A5	
B6		A6	
B7	CLK_PCI	A7	PCI_RST#
B8	REQ1#_PCI0	A8	GNT1#_PCI0
B9		A9	PCI_PME#
B10	PCI_AD31	A10	PCI_AD30
B11	PCI_AD29	A11	
B12		A12	PCI_AD28
B13	PCI_AD27	A13	PCI_AD26
B14	PCI_AD25	A14	
B15		A15	PCI_AD24
B16	PCI_C/BE3#	A16	
B17	PCI_AD23	A17	PCI_AD22
B18		A18	PCI_AD20
B19	PCI_AD21	A19	
B20	PCI_AD19	A20	PCI_AD18
B21		A21	PCI_AD16
B22	PCI_AD17	A22	
B23	PCI_C/BE2#	A23	PCI_FRAME#
B24		A24	
B25	PCI_IRDY#	A25	PCI_TRDY#
B26		A26	
B27	PCI_DEVSEL#	A27	PCI_STOP#
B28		A28	
B29	PCI_LOCK#	A29	SDONE
B30	PCI_PERR#	A30	SBO#
B31		A31	
B32	PCI_SERR#	A32	PCI_PAR
B33		A33	PCI_AD15
B34	PCI_C/BE1#	A34	
B35		A35	PCI_AD13
B36	PCI_AD14	A36	PCI_AD11
B37		A37	
B38	PCI_AD12	A38	PCI_AD9
B39	PCI_AD10	A39	
B40	SEL66_33#	A40	
B41		A41	PCI_C/BE0#
B42		A42	
B43	PCI_AD8	A43	PCI_AD6
B44	PCI_AD7	A44	
B45		A45	PCI_AD4
B46	PCI_AD5	A46	
B47	PCI_AD3	A47	PCI_AD2
B48		A48	PCI_AD0
B49	PCI_AD1	A49	
B50		A50	REQ64#
B51	ACK64#	A51	
B52		A52	

key

0.1UF 16V C90

0.1UF 16V C89

R100 8.25K

R101 10K

R125 33.2 PCI_AD24

J1

64		32	
63	PCI_INTA#	31	
62	PCI_INTD#	30	
61		29	GNT0#_LAN
60		28	PCI_PME#
59	PCI_RST#	27	PCI_AD30
58		26	PCI_AD28
57	PCI_AD27	25	PCI_AD24
56	PCI_AD26	24	
55		23	PCI_AD22
54	PCI_AD21	22	PCI_AD20
53		21	PCI_AD18
52	PCI_AD16	20	PCI_FRAME#
51	PCI_C/BE2#	19	PCI_TRDY#
50	PCI_IRDY#	18	PCI_STOP#
49	PCI_DEVSEL#	17	SDONE
48	PCI_LOCK#	16	SBO#
47	PCI_PERR#	15	PCI_PAR
46	PCI_SERR#	14	PCI_AD15
45	PCI_LOCK#	13	PCI_AD11
44		12	PCI_AD9
43	PCI_AD14	11	PCI_C/BE0#
42	PCI_AD12	10	PCI_AD4
41	SEL66_33#	9	PCI_AD2
40		8	PCI_AD0
39	PCI_AD7	7	REQ64#
38	PCI_AD6	6	
37	PCI_AD2	5	
36	PCI_AD0	4	
35	REQ64#	3	
34		2	
33		1	

R124 33.2 PCI_AD23

VCC3 VCC5

96		64	
95		63	
94		62	
93		61	PCI_INTA#
92		60	PCI_INTD#
91	PRSNT1#	59	
90	PRSNT2#	58	
89		57	PCI_RST#
88	CLK_LAN	56	
87	REQ0#_LAN	55	
86	PCI_AD31	54	
85	PCI_AD29	53	PCI_AD27
84	PCI_AD25	52	PCI_AD26
83	PCI_C/BE3#	51	
82	PCI_AD23	50	PCI_AD21
81	PCI_AD19	49	
80	PCI_AD17	48	PCI_AD16
79		47	PCI_C/BE2#
78		46	PCI_IRDY#
77		45	PCI_DEVSEL#
76		44	PCI_LOCK#
75		43	
74	PCI_C/BE1#	42	PCI_AD14
73	PCI_AD13	41	PCI_AD12
72	PCI_AD10	40	SEL66_33#
71		39	PCI_AD7
70	PCI_AD8	38	PCI_AD6
69	PCI_AD5	37	PCI_AD2
68	PCI_AD3	36	PCI_AD0
67	PCI_AD1	35	REQ64#
66	ACK64#	34	
65		33	

10-A4 CLK_LAN 6-C3,6-D8 REQ0#_LAN

VCC3

PCI_LOCK#	10K R7 2	7	
PCI_PERR#	10K R7 1	8	Not supported on the Geode
PCI_SERR#	10K R7 3	6	
PCI_INTA#	10K R8 2	7	
PCI_INTB#	10K R8 4	5	
PCI_INTC#	10K R8 1	8	
PCI_INTD#	10K R8 3	6	
SDONE	10K R7 4	5	
SBO#	10K R118		
SEL66_33#	10K R117		

R199 180K

C164 5PF 50V

R53 10MEG

Y3 32.768KHZ

C163 22PF 50V

C165 22PF 50V

VCC3

SYS_RST#	1K	R115
RST_STB#	1K	R175
LOW_BAT#	1K	R178
PCI_PME#	5.6K	R126
MFGPT7_C1	5.6K	R174
PWRBTN#	1K	R177
	100	R305
TEST_MODE	1K	R176
FUNC_TEST	1K	R173

U37 7SZ125 VCC3;5 GND;3 URL

14-C2,15-D6 VCC3_PWRGOOD

J24 PWR Switch URL

INTB# and INTC# not routed to DIN Connector.
Use INTD# as primary interrupt

THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.

HOBART

NAME: SCH, LXSCALE MAIN BOARD

SUBCIRCUIT: 5536 / PCI Slot / LAN Slot

VIEWLOGIC PROJECT: HLX_SCALE	FIRST USED ON: HLX_SCALE
VIEWLOGIC FILENAME: 444635C	DCC: DS
REF. ASSEMBLY NUMBER: 00-444635	REF. PCB NUMBER: 00-444634
DWN BY: J. DUSING	DATE: 04-10-07
CHK BY: M. EBERHARDT	DATE: 04-11-07

LAST UPDATE: 4-12-2007_10:55

DEV DWG:

SIZE	DRAWING NO	SHEET	REV
C	00-444633	8 OF 22	C

TP22
Place near input - either side

U23

AMD GEODE™ COMPANION DEVICE

IDE_IRQ — 22 R73 — B12 IDE_IRQ0
IDE_RST# — 22 R65 — F15 IDE_RESET#
CLK_IDE (10-A4) — A10 MHZ66_CLK

22 R66
IDE_A0 — A11 IDE_AD0
IDE_A1 — A12 IDE_AD1
IDE_A2 — B11 IDE_AD2
IDE_ACK# — C12 IDE_DACK0#
IDE_DRQ# — A14 IDE_DREQ0
IDE_IOR# — B13 IDE_IOR0#
IDE_IOW# — C13 IDE_IOW0#
IDE_RDY — A13 IDE_RDY0
IDE_CS0# — B10 IDE_CS0#

22 R73
IDE_CS1# — C10 IDE_CS1#
IDE_D0 — B14 IDE_DATA0
IDE_D1 — A15 IDE_DATA1
IDE_D2 — C15 IDE_DATA2
IDE_D3 — C16 IDE_DATA3
IDE_D4 — B17 IDE_DATA4
IDE_D5 — D15 IDE_DATA5
IDE_D6 — E15 IDE_DATA6
IDE_D7 — E16 IDE_DATA7
IDE_D8 — E17 IDE_DATA8
IDE_D9 — D17 IDE_DATA9
IDE_D10 — D16 IDE_DATA10
IDE_D11 — C17 IDE_DATA11
IDE_D12 — A17 IDE_DATA12
IDE_D13 — B16 IDE_DATA13
IDE_D14 — B15 IDE_DATA14
IDE_D15 — C14 IDE_DATA15

PCBEEP (9-A4,11-A4) — K3 AC_BEEP

BITCLK — M1 AC_CLK
SYNC_BOS0 — L3 AC_S_SYNC/BOS0
SDATA_IN — L1 AC_S_IN
SDATA_OUT_BOS1 — L2 AC_S_OUT/BOS1

CLK_48_DOT (6-B8) — 33.2 R315 — N17 MHZ48_CLK

USBPWR_EN1 (12-B7) — P17 USB_PWR_EN1
USBPWR_EN2 (12-C7) — N16 USB_PWR_EN2
USB_OC# (9-A4,12-C7) — N15 USB_OC_SENS#

USB0+ (12-C5) — K16 USB1_DATPOS
USB0- (12-D5) — K17 USB1_DATNEG
USB1+ (12-B5) — L16 USB2_DATPOS
USB1- (12-B5) — L17 USB2_DATNEG
USB2+ (12-B5) — H17 USB3_DATPOS
USB2- (12-B5) — H16 USB3_DATNEG
USB3+ (12-D2,15-C6, 15-C8) — G17 USB4_DATPOS
USB3- (12-D2,15-C6) — G16 USB4_DATNEG

CS5536 URL

LPC_CLK — H1 CLK_LPC_IOC (10-A4)
LPC_AD0 — H2 LAD0
LPC_AD1 — J2 LAD1
LPC_AD2 — J1 LAD2
LPC_AD3 — K1 LAD3
LPC_DRQ# — G1 LDRQ#
LPC_FRAME# — H3 LFRAME#
LPC_SERIRQ — G2 SERIRQ

SMB_CLK — G3 SMB_SCL (4-B4,9-B4 11-C8)
SMB_DATA — F1 SMB_SDA (4-B4,9-A4 11-C8)

UART2_RX — E1 UART2_RX (5-C8)
UART2_TX — E2 UART2_TX (5-C8,9-B8)

TCK — N2 JTAGTCK (6-A6,6-C1)
TDI — P1 TDO_CPU (6-A6)
TDO — P2 JTAGTDO (6-C1)
TMS — N3 JTAGTMS (6-A6,6-C1)
T_DEBUG_IN — M2 TDBGI_IOC
T_DEBUG_OUT — M3

LVD_EN# — C7 LVD_EN#

USB_VBUS — M15 USB3PWR
USB_REXT — K15 USB_REXT

MHZ48_XCO — J15 XTALO_48
MHZ48_XCI — H15 XTALI_48
MHZ48_XCEN — F17

VCC3 — R249 3.32K
R248 3.32K

DESIGN NOTE: Place series R near the audio CODEC.

BITCLK — R222 43.2 — AC97_BITCLK (11-A4)
SDATA_IN — R229 43.2 — AC97_DATA_IN (11-A4)
SDATA_OUT_BOS1 — R236 43.2 — AC97_DATA_OUT (11-A4)
SYNC_BOS0 — R220 43.2 — AC97_SYNC (11-A4)

DESIGN NOTE: Place series R near the IOC.
R219 1K NOSTUFF
R237 1K NOSTUFF

BOS1	BOS0	BOOT STRAP OPTIONS
0	0	LPC ROM OFF LPC
1	0	NOR FLASH OFF IDE INTERFACE
0	1	RESERVED
>> 1	1	SST FWH OFF LPC (DEFAULT)

Internal PU's - pg. 34

XTALO_48
XTALI_48
Y4 48.000MHZ
C236 15PF 50V URL
C235 15PF 50V

U14 VCC3

LPC FLASH URL

VCC2 — 32
CE/NC — 22
OE/INIT — 24 — FWH_INIT#
R/CLK — 31 — CLK_LPC_FWH (10-A4)

LAD0 — 13 DQ0/LAD0
LAD1 — 14 DQ1/LAD1
LAD2 — 15 DQ2/LAD2
LAD3 — 17 DQ3/LAD3
18 DQ4/RSV
19 DQ5/RSV
20 DQ6/RSV
21 DQ7/RSV

A0/ID0 — 12
A1/ID1 — 11
A2/ID2 — 10
A3/ID3 — 9
A4/TBL — 8 — FWH_TBL#
A5/WP — 7 — FWH_WP#
A6/GPI0 — 6 — FGPI0
A7/GPI1 — 5 — FGPI1
A8/NC — 27
VSS — 26
WE/LFRAM — 23 — LFRAME#
VCC1 — 25
A8/GPI2 — 4 — FGPI2
A9/NC — 28
MODE — 29 — FWH_IC
A9/GPI3 — 3 — FGPI3
RESET — 2 — PCI_RST# (6-C8,8-C3,8-C8 8-D2,11-A4 13-C3)

VCC3 — 1 NC
FGPI4 — 30 A10/GPI4
16 VSS1

SST FWH:	M50FW040K5G (4MB)
SST LPC ROM:	49LF030A(3MB)/040A(4MB)/80A(8MB)
WINBOND LPC:	ROM W49V002/003/004

VCC3
UART2_TX — 1K R304
FWH_WP# — 10K R42
FWH_INIT# — 10K R26
FWH_TBL# — 10K R42
FWH_IC — 10K R26
FGPI0 — 10K R159
FGPI1 — 10K R42
FGPI2 — 10K R42
FGPI3 — 10K R26
FGPI4 — 10K R26

VCC3
LAD0 — 10K R39
LAD1 — 10K R39
LAD2 — 10K R39
LAD3 — 10K R39
IDE_CABLEID — 10K R46
LDRQ# — 10K R46
SERIRQ — 10K R46
LFRAME# — 10K R46
SMB_SCL — 2.49K R141
SMB_SDA — 2.49K R140
TDBGI_IOC — 4.75K R171
IDE_RDY — 10K R266
IDE_IRQ — 10K R264
USB_OC# — 10K R232
PCBEEP — 10K R172
IDE_D7 — 10K R250
IDE_DRQ# — 10K R267
LVD_EN# — 10K R204

VCC5
R274 150
Place near J10
URL GREEN D19
HLED
IDE ACTIVITY

VCC5 J23 VCC5

	1	2	
	3	4	
	5	6	
IDE_RST#	7	8	
IDE_D7	9	10	IDE_D8
IDE_D6	11	12	IDE_D9
IDE_D5	13	14	IDE_D10
IDE_D4	15	16	IDE_D11
IDE_D3	17	18	IDE_D12
IDE_D2	19	20	IDE_D13
IDE_D1	21	22	IDE_D14
IDE_D0	23	24	IDE_D15
	25	26	
IDE_DRQ#	27	28	
IDE_IOW#	29	30	
IDE_IOR#	31	32	
IDE_RDY	33	34	IDE_PCSEL0#
IDE_ACK#	35	36	
IDE_IRQ	37	38	
IDE_A1	39	40	
IDE_A0	41	42	IDE_A2
IDE_CS0#	43	44	IDE_CS1#
HLED	45	46	
	47	48	
	49	50	

URL IDE_CABLEID

Primary IDE

R96 470

8-D8,9-B4

J19

	26	1	
IDE_D11	27	2	IDE_D3
IDE_D12	28	3	IDE_D4
IDE_D13	29	4	IDE_D5
IDE_D14	30	5	IDE_D6
IDE_D15	31	6	IDE_D7
IDE_CS1#	32	7	IDE_CS0#
	33	8	
IDE_IOR#	34	9	
IDE_IOW#	35	10	
	36	11	
IDE_IRQ	37	12	
	38	13	
IDE_PCSEL_1#	39	14	
	40	15	
IDE_RST#	41	16	
IDE_RDY	42	17	
IDE_DRQ#	43	18	IDE_A2
IDE_ACK#	44	19	IDE_A1
	45	20	IDE_A0
	46	21	IDE_D0
IDE_D8	47	22	IDE_D1
IDE_D9	48	23	IDE_D2
IDE_D10	49	24	IDE_IOCS16#
	50	25	

Compact Flash

1=S
0=M
IDE_PCSEL_1#

VCC5
R253 10K

R265 4.75K URL

Compact Flash is master unless IDE_PCSEL# pulled up on hard-drive board

THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.

HOBART

NAME: SCH, LXSCALE MAIN BOARD

SUBCIRCUIT: 5536 / Compact Flash / IDE / System BIOS

VIEWLOGIC PROJECT: HLX_SCALE	FIRST USED ON: HLX_SCALE
VIEWLOGIC FILENAME: 444635C	DCC: DS
REF: ASSEMBLY NUMBER: 00-444635	REF: PCB NUMBER: 00-444634
DWN BY: J. DUSING	DATE: 04-10-07
CHK BY: M. EBERHARDT	DATE: 04-11-07
LAST UPDATE: 4-12-2007_10:55	DEV DWG:

SIZE	DRAWING NO	SHEET	REV
C	00-444633	9 OF 22	C

J10	
1-2	Normal
2-3	Clear CMOS

Move jumper from 2-3 to 1-2 after first powering up

BH1 POS NEG B1 URL URL

J10 1 2 3

URL P1 LEVEL=STD PARTS=1

R156 1K C121 0.1UF 16V

U23 AMD GEODE™ COMPANION DEVICE

A3 VBAT
B6 VIO_VSB
K14 VDDC_USB1
H14 VDDC_USB0
A7 VCORE_VSB
D10 VCORE5
D8 VCORE
H4 VCORE4
K4 VCORE3
P8 VCORE2
P10 VCORE1
P14 VDDIO_USB0
M14 VDDIO_USB1
F14 VDDIO_USB2
D14 VDDIO_USB3
D12 VIO7
D9 VIO8
D6 VIO9
D4 VIO2
F4 VIO5
M4 VIO1
P4 VIO4
P6 VIO6
P9 VIO
P12 VIO3

NC9 R9
NC L15
NC10 U17
NC11 U16
NC20 F16
NC18 J16
NC19 M16
NC15 U15
NC14 C11
NC13 A16
NC12 R3
NC8 M17
NC7 J17
NC6 B5
NC5 B4
NC4 B1
NC3 T2
NC2 U2
NC1 A2
NC17 C4
NC16 B2
VSSIO_USB0 L14
VSSIO_USB1 J14
VSSIO_USB2 G14
VSSIO_USB4 N14
VSSIO_USB3 E14
VSS10 D13
VSS9 D11
VSS8 D7
VSS7 D5
VSS6 E4
VSS5 G4
VSS4 J4
VSS3 L4
VSS2 N4
VSS12 P5
VSS1 P7
VSS P11
VSS11 P13

CS5536 URL

VCORE R221 4.7 C184 1UF 6.3V C210 0.1UF 16V C211 0.01UF 50V

VCC3 C63 22UF 10V C209 0.01UF 50V C208 0.001UF 50V C212 100PF 50V

VCC3 C35 10V 22UF C67 10V 22UF C125 0.22UF 10V C152 0.022UF 50V C153 0.022UF 50V C183 470PF 50V C174 470PF 50V

C162 0.0033UF 50V C251 0.0033UF 50V C182 0.0033UF 50V C99 0.0033UF 50V C185 0.0033UF 50V C161 0.0033UF 50V C252 0.0033UF 50V

VCC3 C12 22UF 10V C111 0.22UF 10V C106 0.0033UF 50V C107 0.0033UF 50V

R16 3.32K

Stuff to enable spread spectrum EMI mitigation technique

NOSTUFF R129 10K

U12 MK1491_09F URL

VDD1 4 VDD 8 VDD2 12 VDD4 19 VDD3 25 VDD5 28

17 PD#
10 SEL66/33#
3 XTALOUT
2 XTALIN
1 GND5 7 GND1 11 GND3 15 GND4 21 GND2 22 GND

REFCLK1 26 14_ISA_IOC_CLK R11 43.2 CLK_14_IOC 8-B8
REFCLK0/SP# 27 14_CODEC_CLK R10 43.2 CLK_14_CODEC 11-A4
48MHZ 13
48MHZ/TS# 14
66MHZ 16 IDE_CLK R17 43.2 CLK_IDE 9-D8
LCLK2 9 LPC_IOC_CLK R36 43.2 CLK_LPC_IOC 9-C6
LCLK1 6 LPC_FWH_CLK R35 43.2 CLK_LPC_FWH 9-D4
LCLK0 5
PCICLK0 18 CPU_CLK R15 43.2 CLK_CPU 6-B8
PCICLK1 20 IOC_CLK R14 43.2 CLK_IOC 8-D8
PCICLK2 23 PCI_CLK R13 43.2 CLK_PCI 8-C5
PCICLK3 24 LAN_CLK R12 43.2 CLK_LAN 8-B2

SEL66_33# 6-B8,8-A3,8-B5 8-C2-

Y1 14.318MHZ R24 10MEG URL C101 15PF 50V C110 15PF 50V


THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.


HOBART


NAME: SCH, LXSCALE MAIN BOARD

SUBCIRCUIT: 5536 Power Pins / Clock Generator / Battery

VIEWLOGIC PROJECT: HLX_SCALE	FIRST USED ON: HLX_SCALE
VIEWLOGIC FILENAME: 444635C	DCC: DS
REF. ASSEMBLY NUMBER: 00-444635	REF. PCB NUMBER: 00-444634
DWN BY: J. DUSING	DATE: 04-10-07
LAST UPDATE: 4-12-2007_10:55	
CHK BY: M. EBERHARDT	DATE: 04-11-07
DEV DWG:	
SIZE: C	DRAWING NO: 00-444633
SHEET: 10 OF 22	REV: C

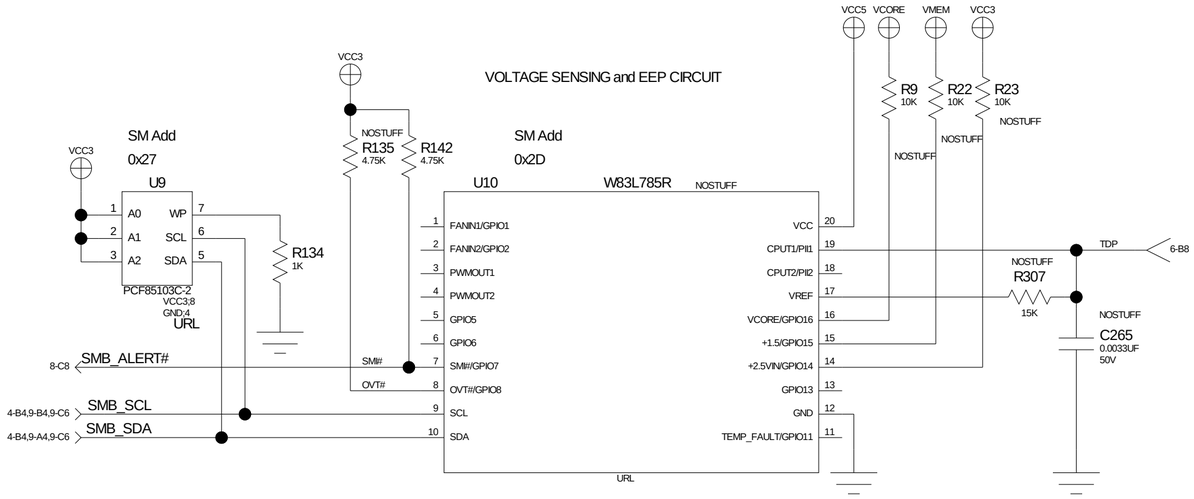

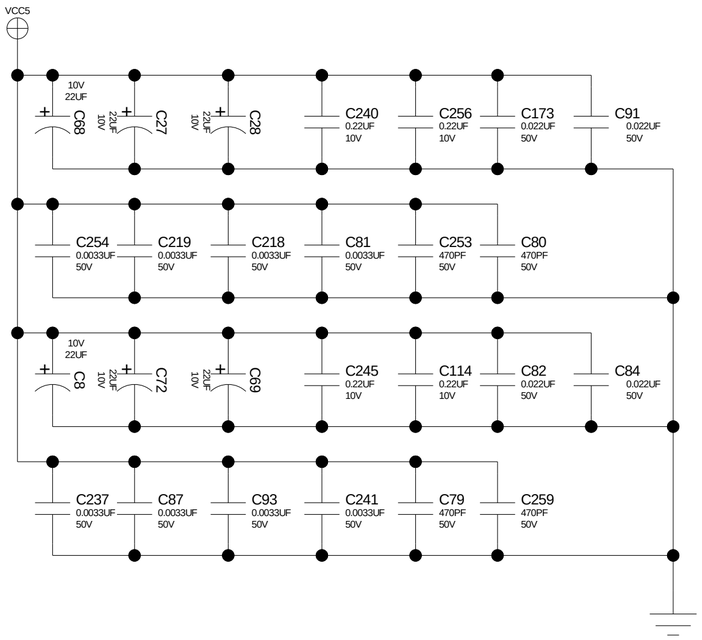

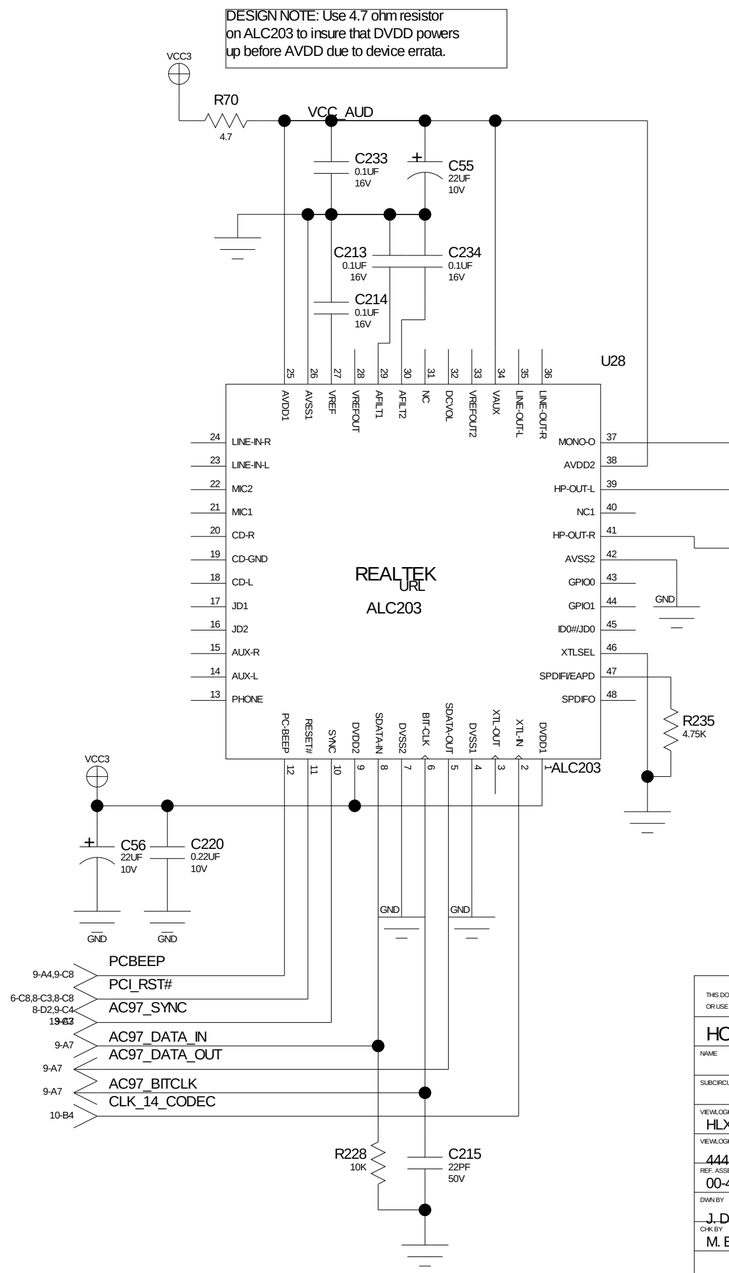

THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.

HOBART			
NAME: SCH, LXSCALE MAIN BOARD			
SUBCIRCUIT: AC97 / Amplifier			
VIEWLOGIC PROJECT: HLX_SCALE		FIRST USED ON: HLX_SCALE	
VIEWLOGIC FILENAME: 444635C		DCC: DS	
REF: ASSEMBLY NUMBER: 00-444635		REF: PCB NUMBER: 00-444634	
DWN BY: J. DUSING	DATE: 04-10-07	LAST UPDATE: 4-12-2007_10:55	
CHK BY: M. EBERHARDT	DATE: 04-11-07	DEV DWG:	
	SIZE: C	DRAWING NO: 00-444633	SHEET: 11 OF 22 / REV: C

USB

For isolating and testing of printer USB

TP25 TP26 TP18 TP19 TP20 TP21

USB3PWR → 9-B6,12-C1 14-C3
USB3- → 9-B8,15-C6
USB3+ → 9-B8,15-C6 15-C8

PORT 3

Peripheral Controller

Not High Speed Compliant

PORT 0

(Internal)

9-B8 USB0-
9-B8 USB0+
L7 (URL)
D15 (URL), D16 (URL)
R180 15K, R181 15K
USB0PWR
J155 (URL, VBUS 1, D- 2, D+ 3, GND 4, 6)

VCC3
R233 10K
9-B8 USBPWR_EN2
9-A4,9-B8 USB_OC#
U29 MIC2026-1BM (URL) GND;6
ENA 1, FLGA- 2, ENB- 4, FLGB- 3, IN 7, OUTA 8, OUTB 5
VCC5
C66 22UF 10V
C238 0.1UF 16V, C58 47UF 16V, C244 0.1UF 16V

Power USB3PWR
R223 150
URL GREEN D17
Place near L4

Power USB0PWR
R158 150
URL GREEN D7
Place between port 1 and 2

9-B8 USB1-
9-B8 USB1+
L2 (URL)
USB1PWR

PORT 1

(External)

Do NOT use "spokes" on mounting tab connections to GND

9-B8 USB2-
9-B8 USB2+
L5 (URL)
D12 (URL), D10 (URL), D5 (URL), D4 (URL)
FB1 (URL), FB3 (URL)
USB2PWR


PORT 2

(External)

VCC3
R155 10K
9-B8 USBPWR_EN1
U13 MIC2026-1BM (URL) GND;6
ENA 1, FLGA- 2, ENB- 4, FLGB- 3, IN 7, OUTA 8, OUTB 5
VCC5
C117 0.022UF 50V, C17 47UF 16V, C86 0.1UF 16V, C38 47UF 16V, C126 0.1UF 16V


THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.


HOBART	
NAME: SCH, LXSCALE MAIN BOARD	
SUBCIRCUIT: USB Ports	
VIEWLOGIC PROJECT: HLX_SCALE	FIRST USED ON: HLX_SCALE
VIEWLOGIC FILENAME: 444635C	DCC: DS
REF. ASSEMBLY NUMBER: 00-444635	REF. PCB NUMBER: 00-444634
DWN BY: J. DUSING	DATE: 04-10-07 — LAST UPDATE: 4-12-2007_10:55
CHK BY: M. EBERHARDT	DATE: 04-11-07 — DEV DWG:
SIZE: C	DRAWING NO: 00-444633 — SHEET: 12 OF 22 — REV: C

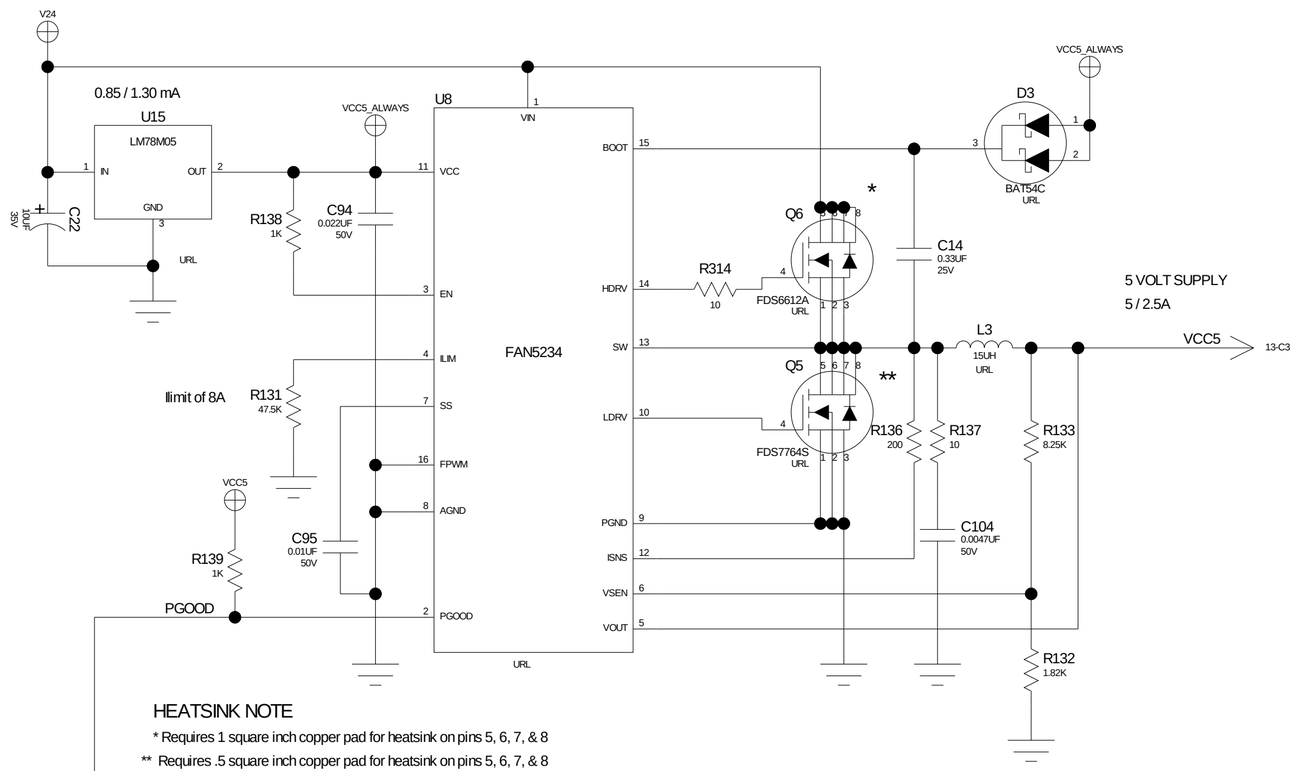

DESIGN NOTE: Enable on VCC3 is used to ensure that VIO powers up (< 1ms) after VCORE. This guarantees that the TFT interface will power up glitch free.

10V MAX for Regulator
Vout = ((R1 + R2) / R2) * 0.8V

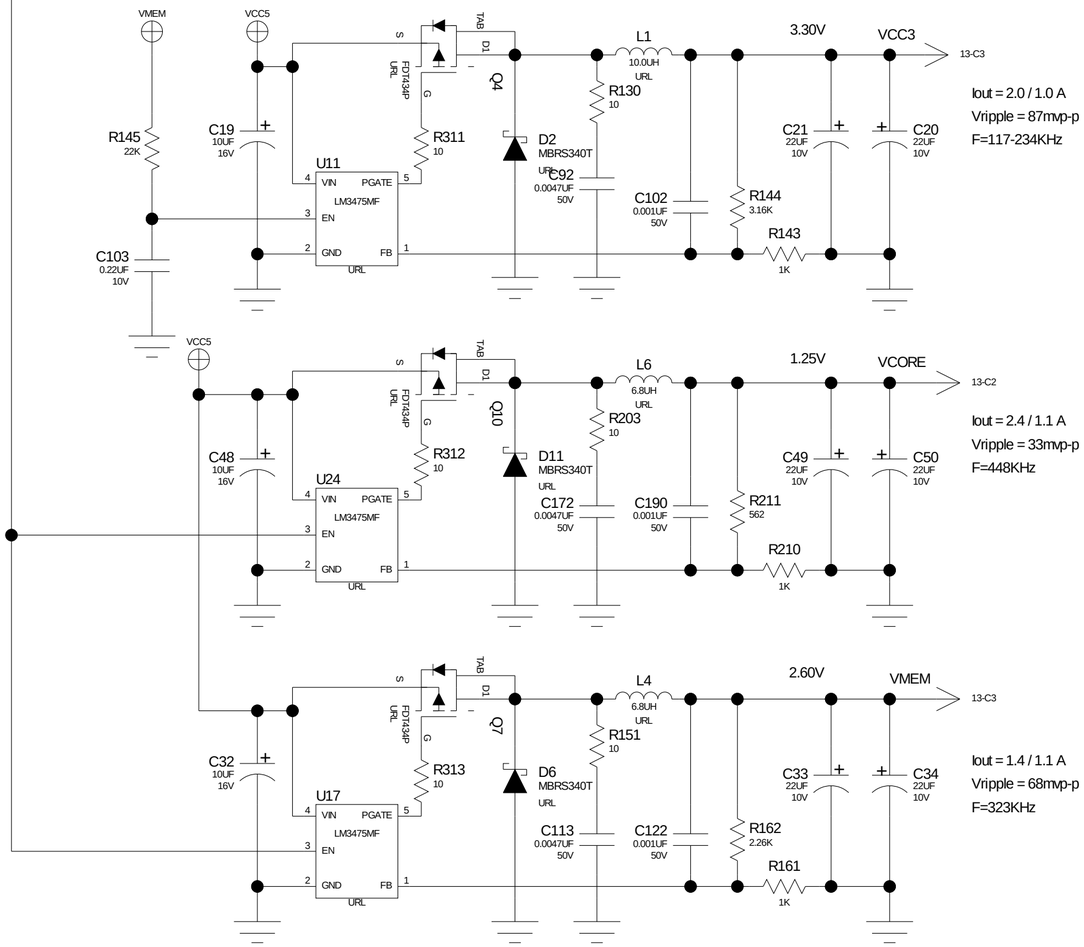

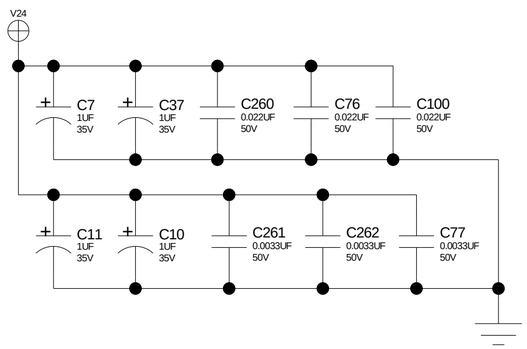


DESIGN NOTE: This design uses LVD to generate system reset. Since LVD only monitors Vcore, the designer must guarantee that Vio and other required voltages are valid at or before Vcore. If this cannot be guaranteed, then RESET_WORK# must be used to hold system in reset until Vio and Vcore and any other required voltages are valid.


SYSTEM POWER

V24=+24.0V
VCC5=+5.0V
VCC3=+3.30V

LX800 and CS5536 andMemory


VCORE=+1.25V
VMEM=+2.60V
MVREF=+1.3V
VIO=+3.30V

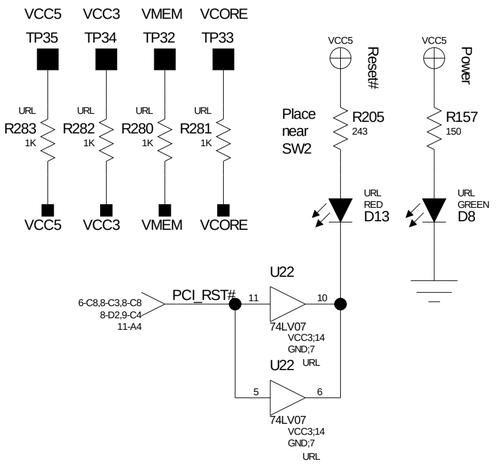

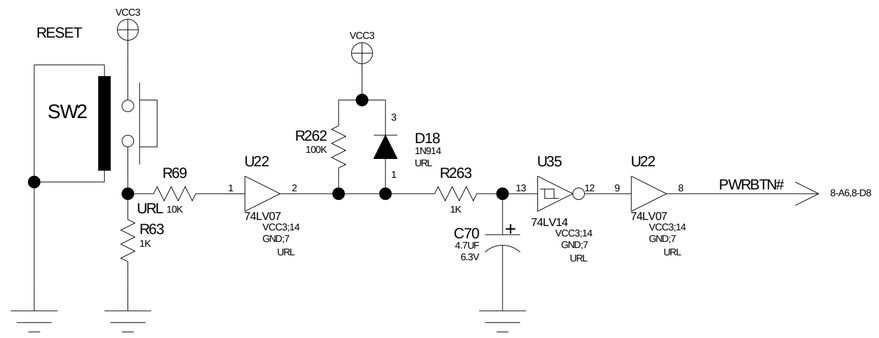

Power On and Reset Sequence


12V DC → PWRBTN# (Geode_in) → WORKING (Geode_out) → LVD → SYS_RST# → PCIRST# (Geode_out)




Vcore & Vio - 90% in 10us - 1s
.4V in 100ms - 5s

THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.

HOBART			
NAME: SCH, LXSCALE MAIN BOARD			
SUBCIRCUIT: Power Supplies, Reset			
VIEWLOGIC PROJECT: HLX_SCALE		FIRST USED ON: HLX_SCALE	
VIEWLOGIC FILENAME: 444635C		DCC: DS	
REF. ASSEMBLY NUMBER: 00-444635		REF. PCB NUMBER: 00-444634	
DWN BY: J. DUSING	DATE: 04-10-07	LAST UPDATE: 4-12-2007_10:55	
CHK BY: M. EBERHARDT	DATE: 04-11-07	DEV DWG:	
	SIZE: C	DRAWING NO: 00-444633	SHEET: 13 OF 22 / REV: C

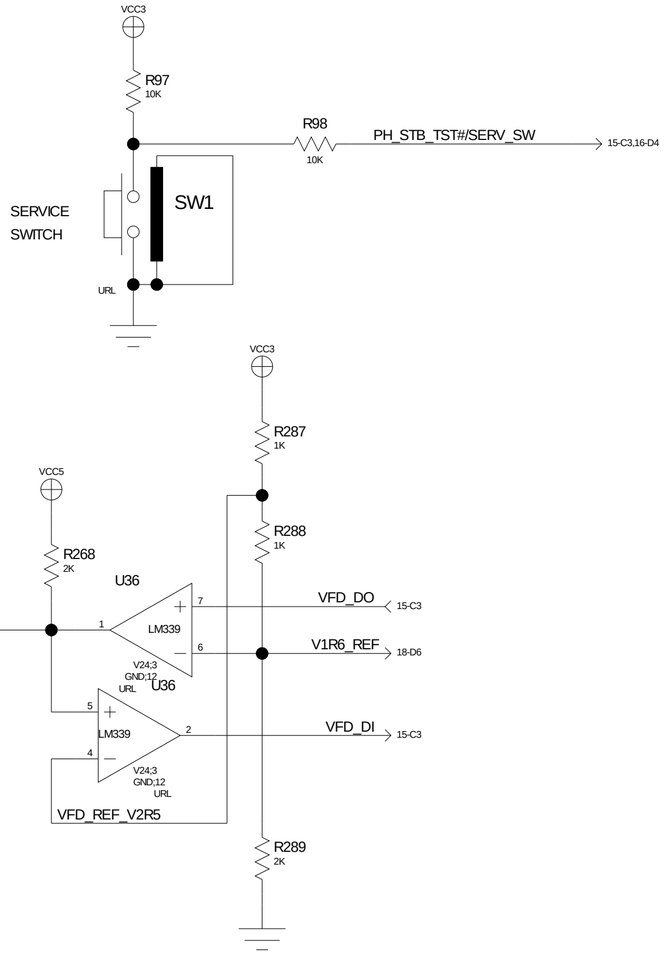

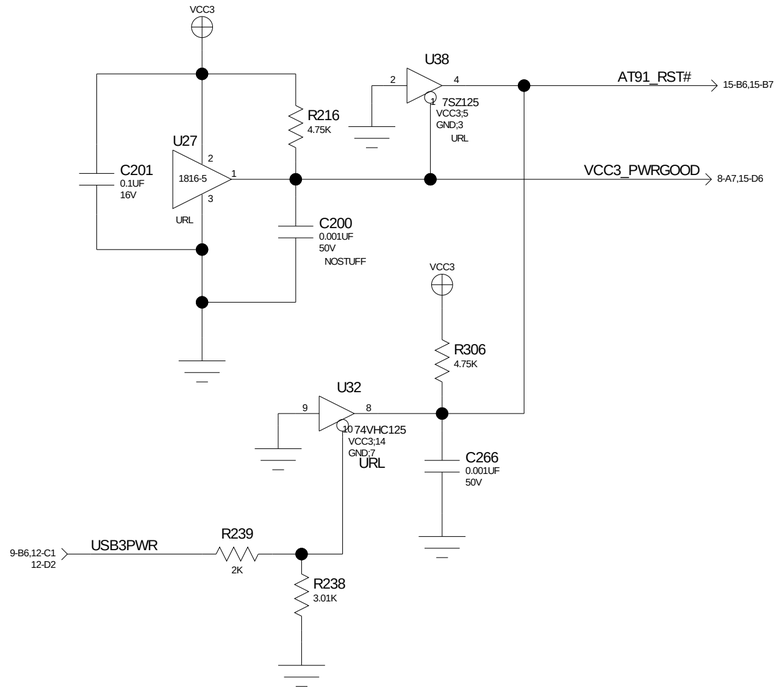

THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.

HOBART


NAME: SCH, LXSCALE MAIN BOARD

SUBCIRCUIT: Peripheral Controller - USB / VF / Service Switch

VIEWLOGIC PROJECT: HLX_SCALE	FIRST USED ON: HLX_SCALE
VIEWLOGIC FILENAME: 444635C	DCC: DS
REF. ASSEMBLY NUMBER: 00-444635	REF. PCB NUMBER: 00-444634


DWN BY: J. DUSING	DATE: 04-10-07	LAST UPDATE: 4-12-2007_10:55
CHK BY: M. EBERHARDT	DATE: 04-11-07	DEV DWG:


SIZE	DRAWING NO	SHEET	REV
C	00-444633	14 OF 22	C

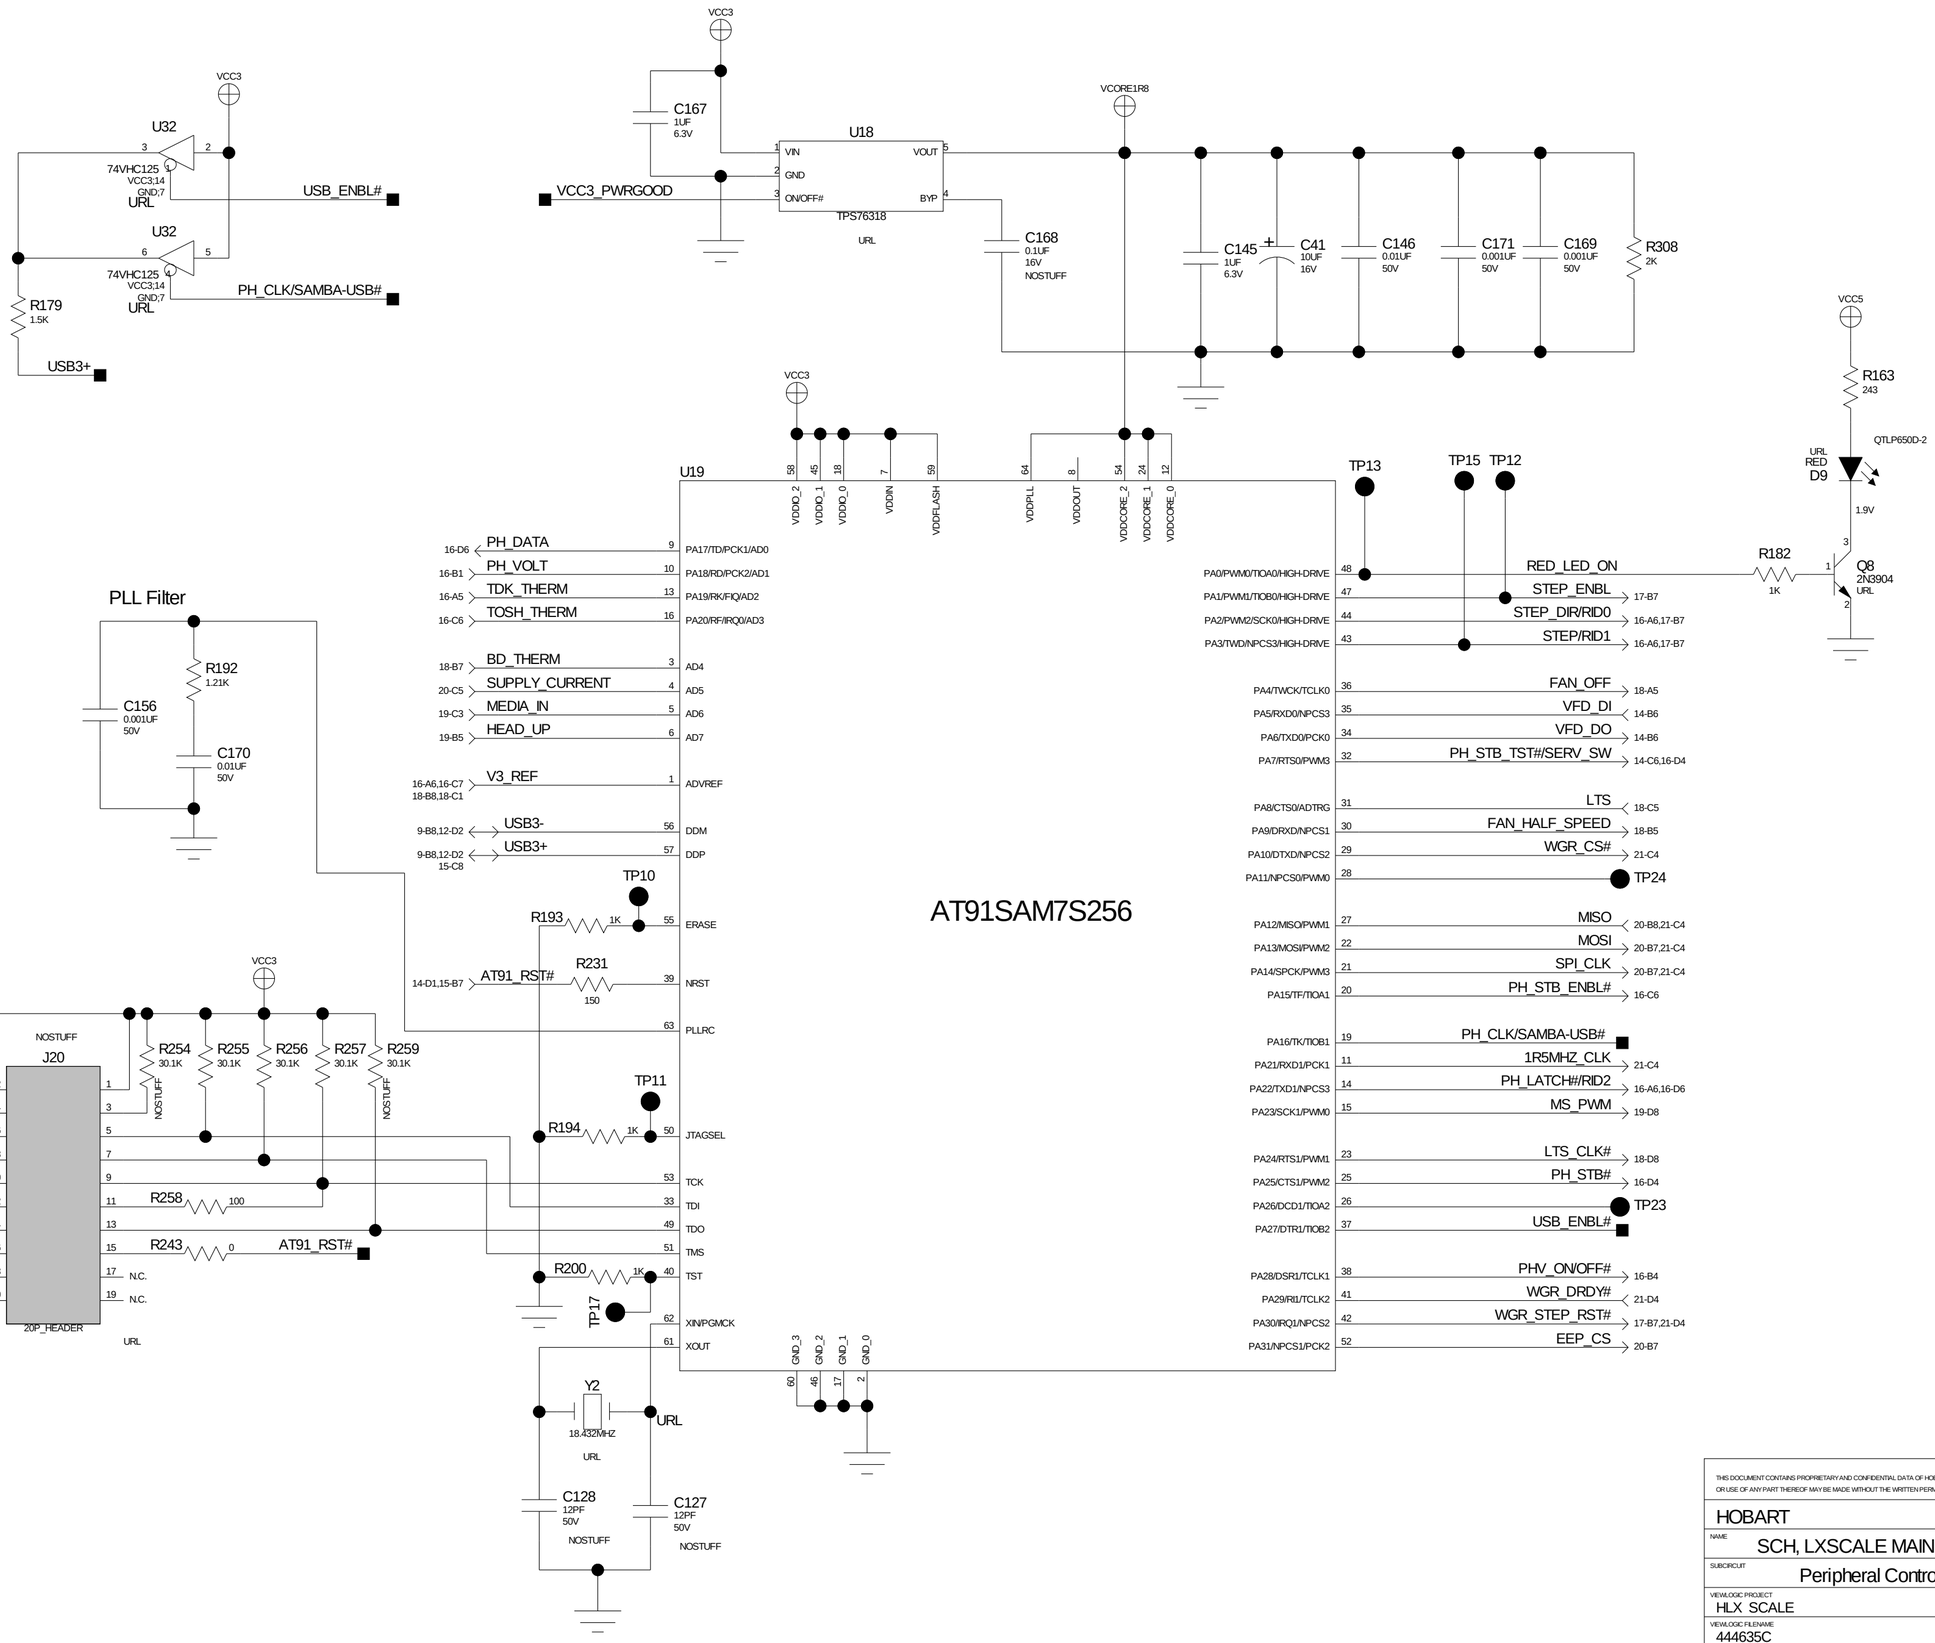



THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.


NAME	SCH, LXSCALE MAIN BOARD
SUBCIRCUIT	Peripheral Controller - ARM CPU
VIEWLOGIC PROJECT	HLX_SCALE
FIRST USED ON	HLX_SCALE
VIEWLOGIC FILENAME	444635C
DCC	DS
REF. ASSEMBLY NUMBER	00-444635
REF. PCB NUMBER	00-444634
DWN BY	J. DUSING
DATE	04-10-07
LAST UPDATE	4-12-2007_10:55
CHK BY	M. EBERHARDT
DATE	04-11-07
DEV DWG	
SIZE	C
DRAWING NO	00-444633
SHEET	15 OF 22
REV	C

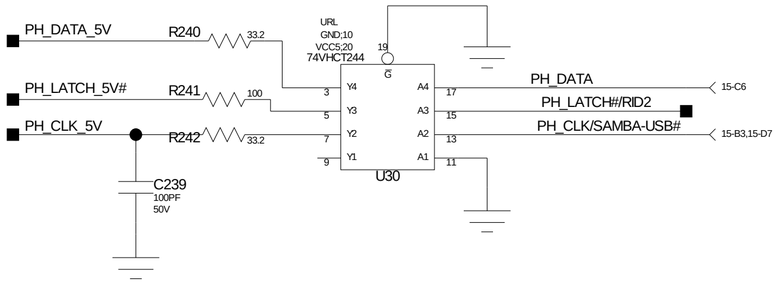

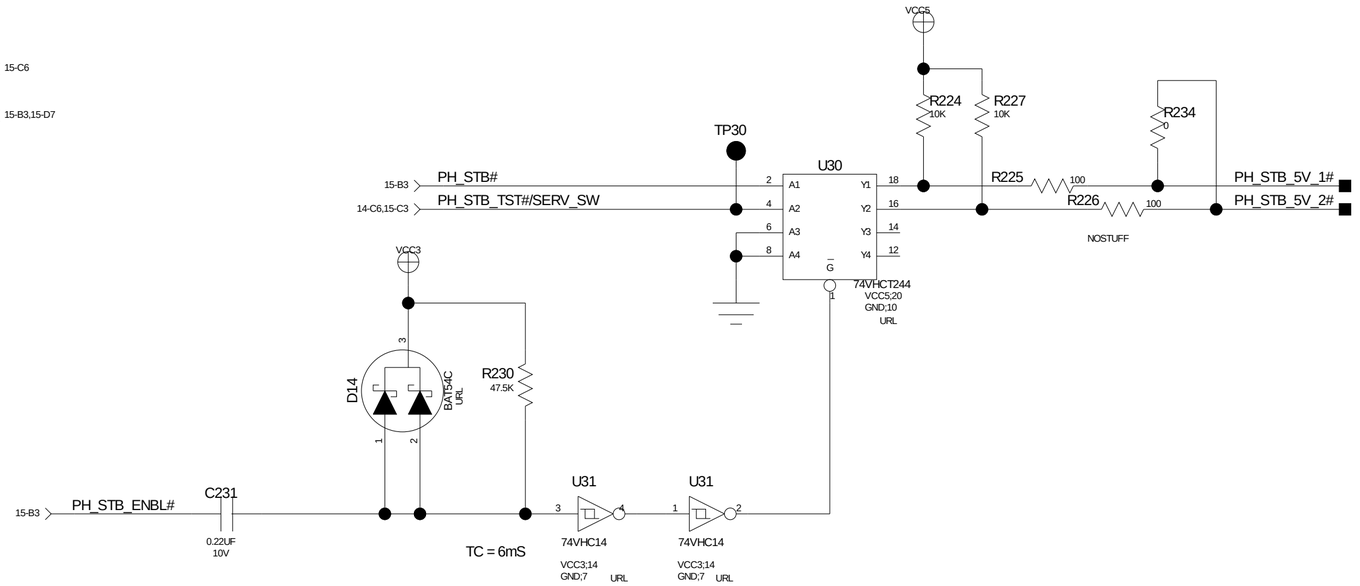

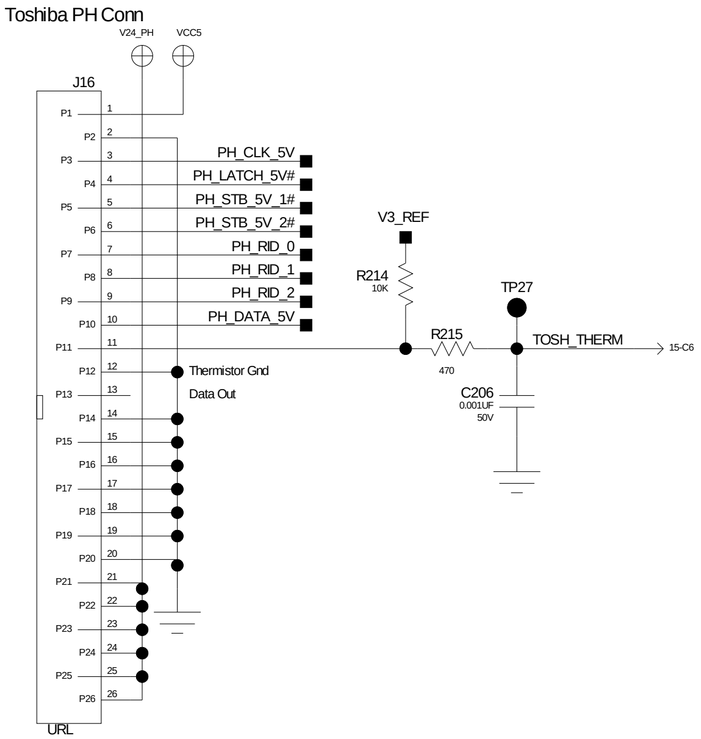

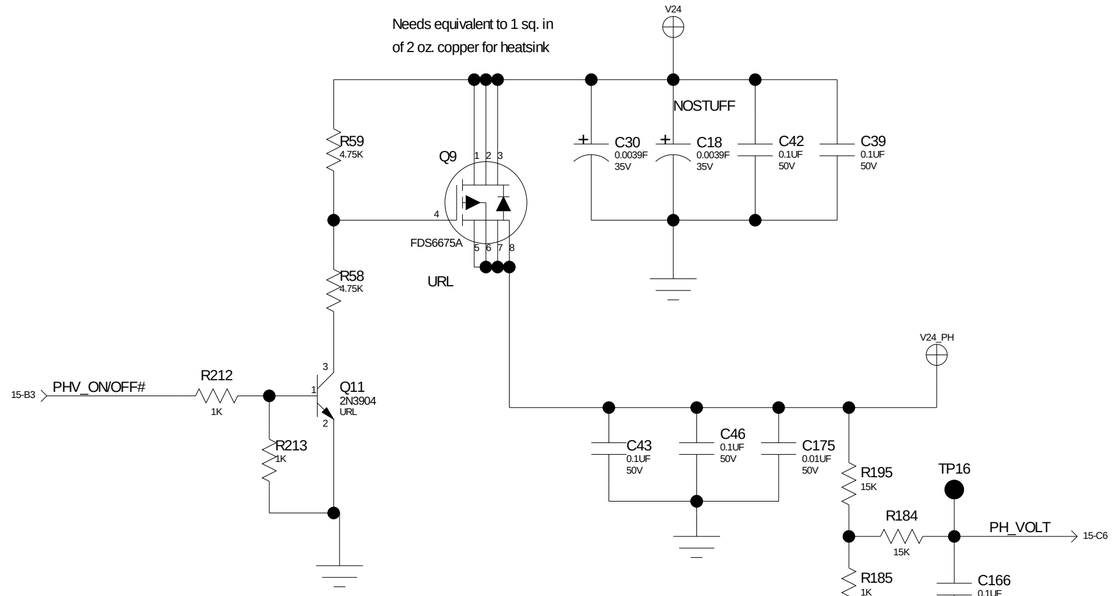

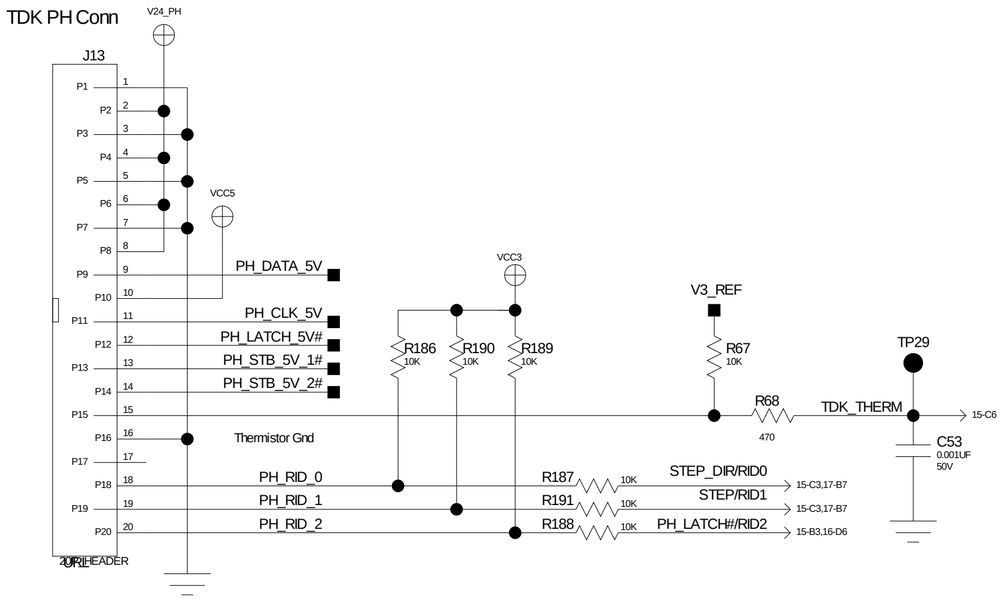

THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.


HOBART

NAME: SCH, LXSCALE MAIN BOARD

SUBCIRCUIT: Peripheral Controller - Printhead Connectors

VIEWLOGIC PROJECT: HLX_SCALE	FIRST USED ON: HLX_SCALE
VIEWLOGIC FILENAME: 444635C	DCC: DS
REF. ASSEMBLY NUMBER: 00-444635	REF. PCB NUMBER: 00-444634
DWN BY: J. DUSING	DATE: 04-10-07
CHK BY: M. EBERHARDT	DATE: 04-11-07
LAST UPDATE: 4-12-2007_10:55	DEV DWG:

SIZE	DRAWING NO	SHEET	REV
C	00-444633	16 OF 22	C

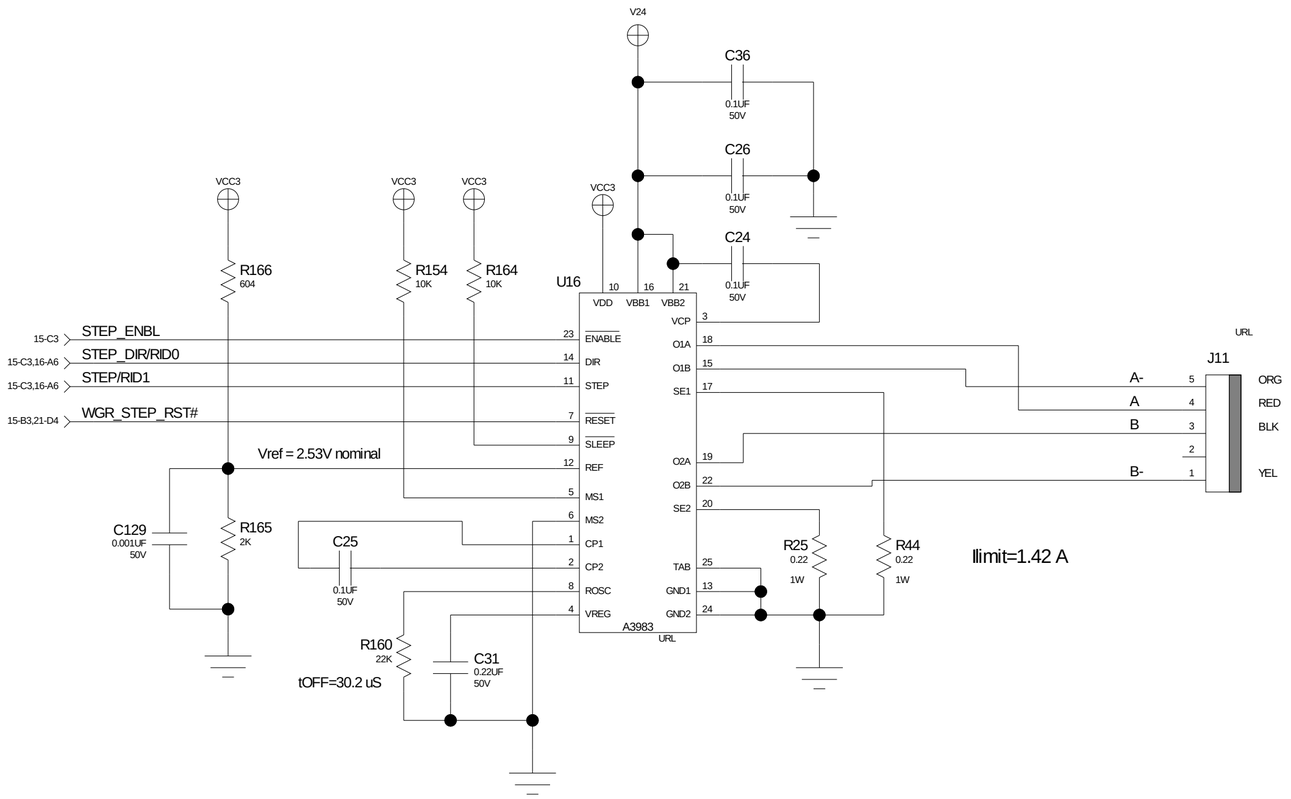

STEPPER

MOTOR

THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.


HOBART

NAME: SCH, LXSCALE MAIN BOARD

SUBCIRCUIT: Peripheral Controller - Stepper Motor Driver


VIEWLOGIC PROJECT: HLX_SCALE	FIRST USED ON: HLX_SCALE
VIEWLOGIC FILENAME: 444635C	DCC: DS
REF. ASSEMBLY NUMBER: 00-444635	REF. PCB NUMBER: 00-444634
DWN BY: J. DUSING	DATE: 04-10-07 — LAST UPDATE: 4-12-2007_10:55
CHK BY: M. EBERHARDT	DATE: 04-11-07 — DEV DWG:

SIZE	DRAWING NO	SHEET	REV
C	00-444633	17 OF 22	C

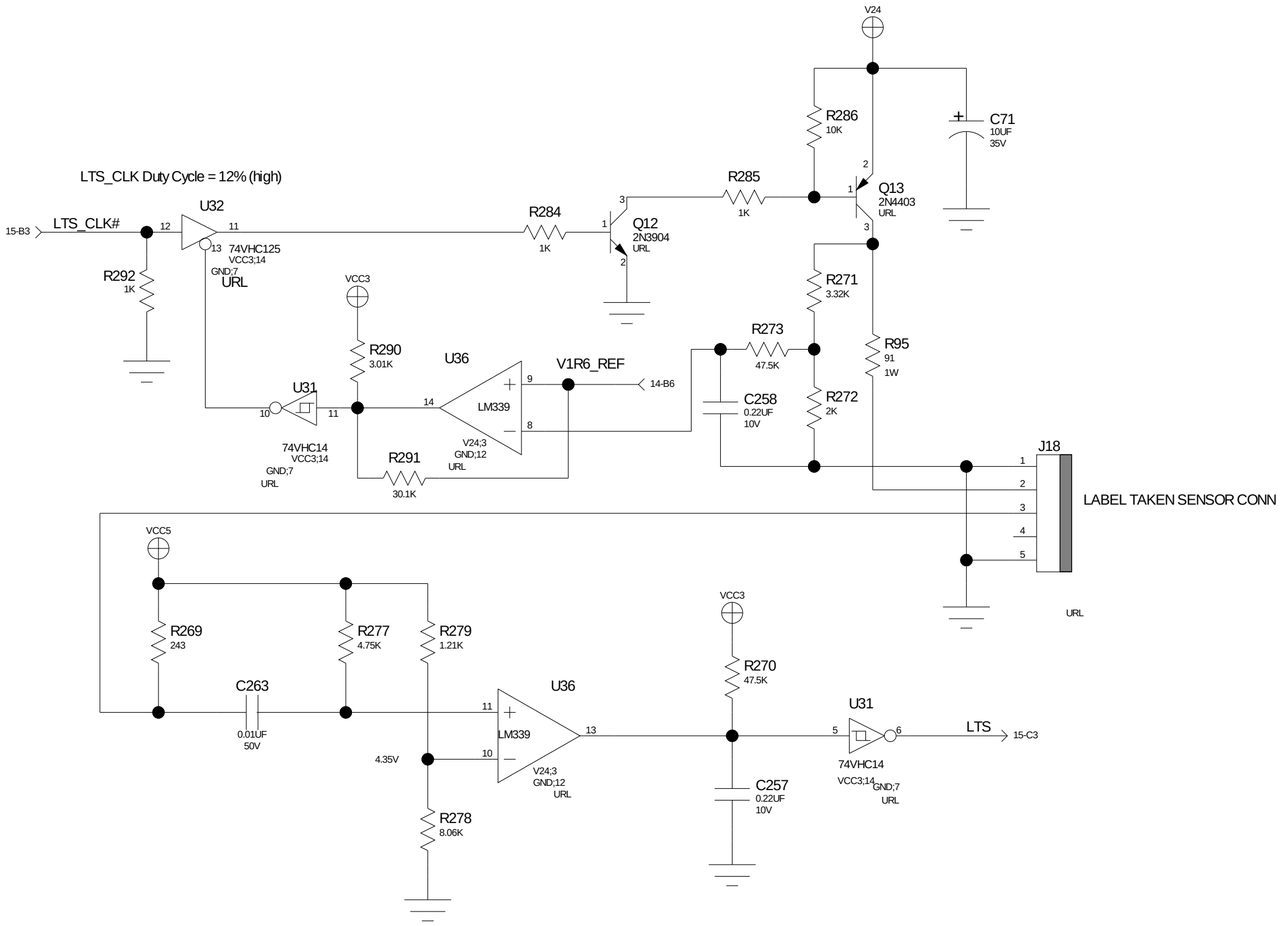

THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.

HOBART			
NAME: SCH, LXSCALE MAIN BOARD			
SUBCIRCUIT: Peripheral Controller - Fan / Label Taken Sensor / Thermistor			
VIEWLOGIC PROJECT: HLX_SCALE		FIRST USED ON: HLX_SCALE	
VIEWLOGIC FILENAME: 444635C		DCC: DS	
REF. ASSEMBLY NUMBER: 00-444635		REF. PCB NUMBER: 00-444634	
DWN BY: J. DUSING	DATE: 04-10-07	LAST UPDATE: 4-12-2007_10:55	
CHK BY: M. EBERHARDT	DATE: 04-11-07	DEV DWG:	
	SIZE: C	DRAWING NO: 00-444633	SHEET: 18 OF 22 / REV: C

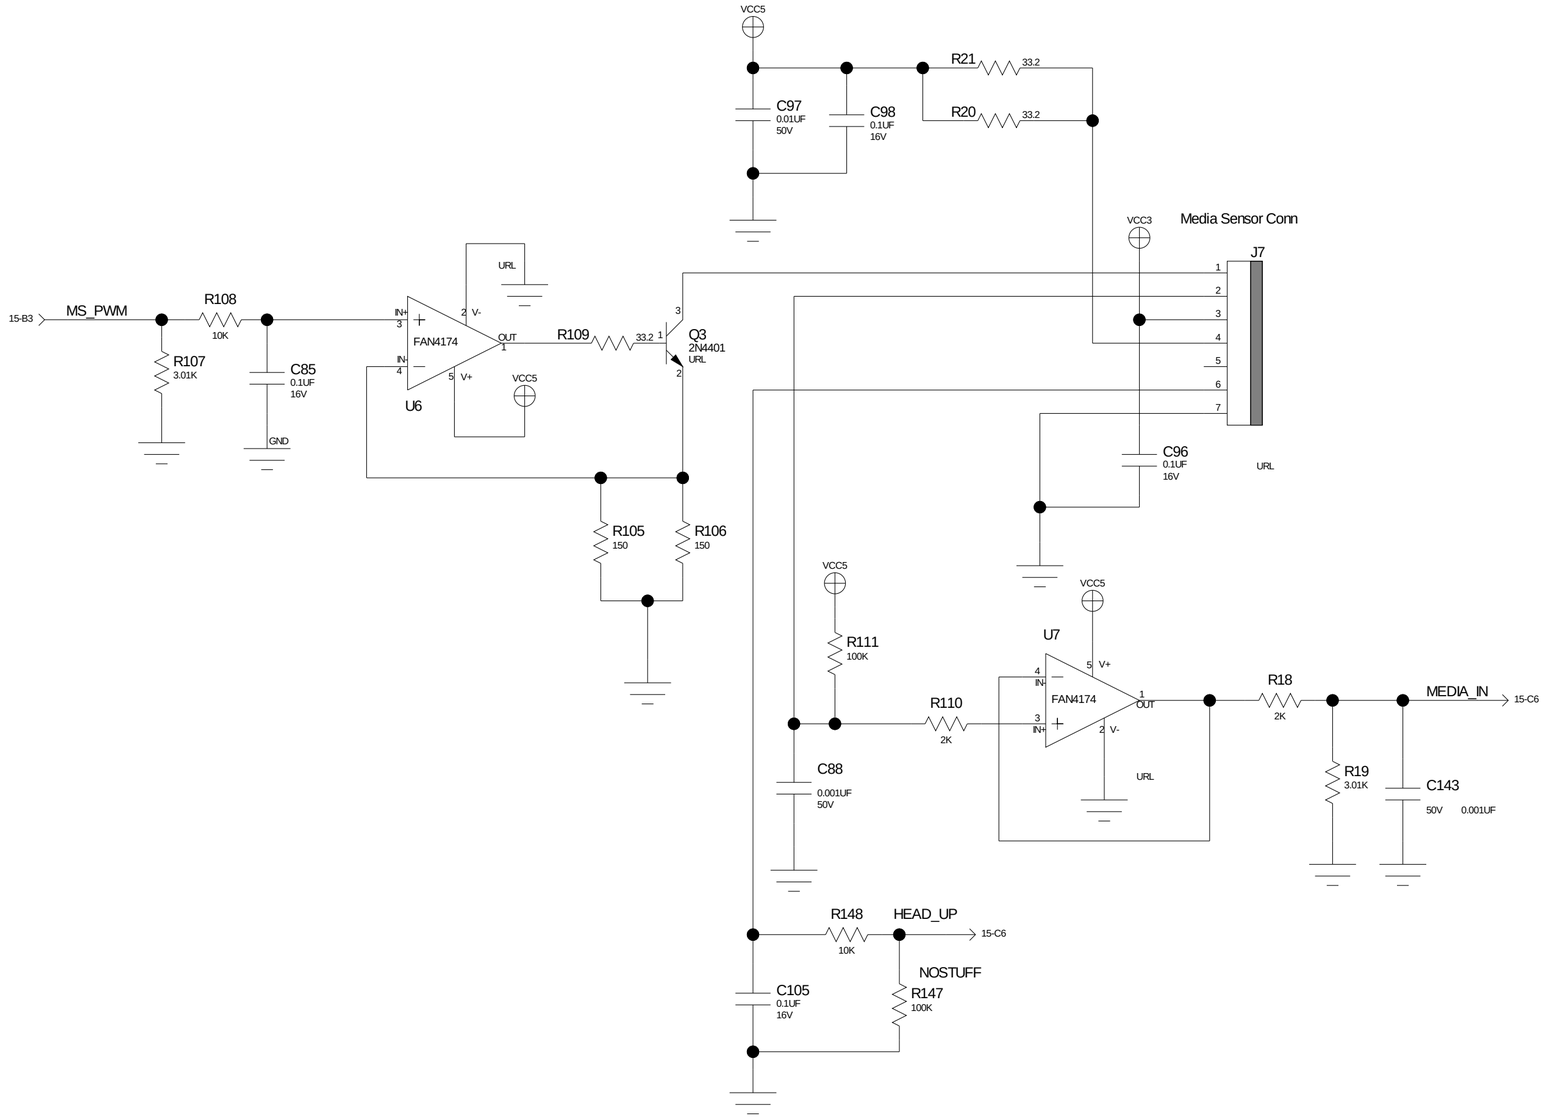


THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.


HOBART


NAME: SCH, LXSCALE MAIN BOARD

SUBCIRCUIT: Peripheral Controller - Media Sensor

VIEWLOGIC PROJECT: HLX_SCALE			FIRST USED ON: HLX_SCALE
VIEWLOGIC FILENAME: 444635C			DCC: DS
REF. ASSEMBLY NUMBER: 00-444635			REF. PCB NUMBER: 00-444634
DWN BY: J. DUSING	DATE: 04-10-07		LAST UPDATE: 4-12-2007_10:55
CHK BY: M. EBERHARDT	DATE: 04-11-07		DEV DWG:
	SIZE: C	DRAWING NO: 00-444633	SHEET: 19 OF 22 / REV: C

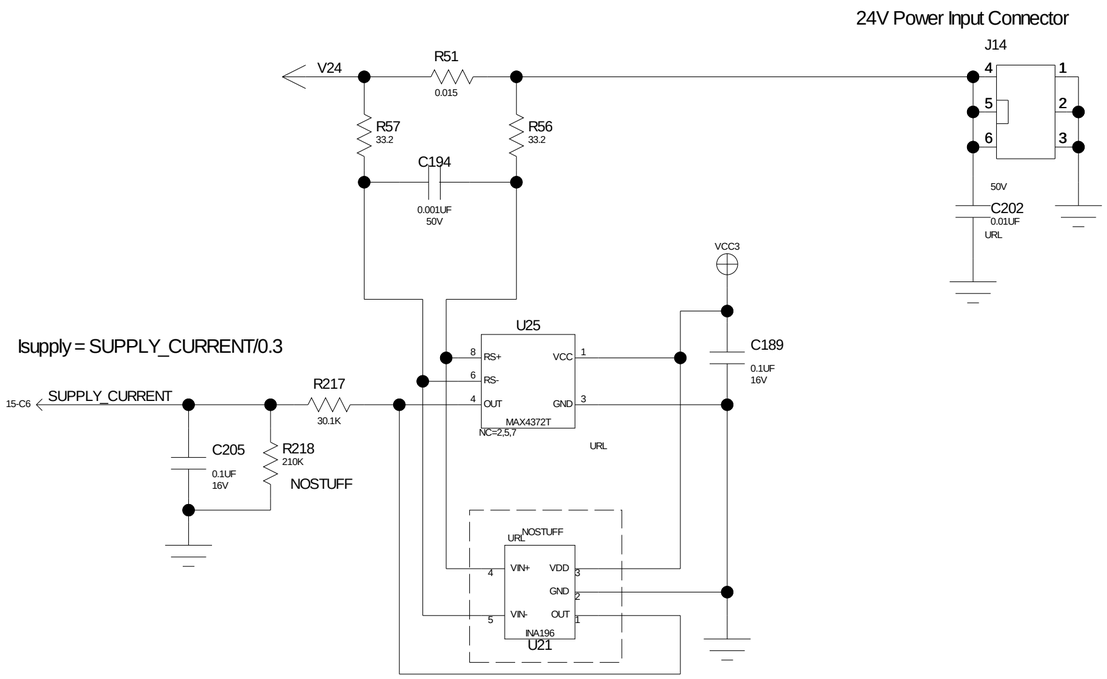

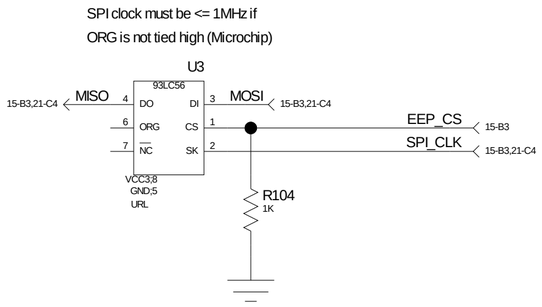




THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION,
OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.


HOBART


NAME: SCH, LXSCALE MAIN BOARD

SUBCIRCUIT: Peripheral Controller - Serial EEP / Power Sense

VIEWLOGIC PROJECT: HLX_SCALE	FIRST USED ON: HLX_SCALE
VIEWLOGIC FILENAME: 444635C	DCC: DS
REF. ASSEMBLY NUMBER: 00-444635	REF. PCB NUMBER: 00-444634
DWN BY: J. DUSING — DATE: 04-10-07	LAST UPDATE: 4-12-2007_10:55
CHK BY: M. EBERHARDT — DATE: 04-11-07	DEV DWG:
SIZE: C — DRAWING NO: 00-444633	SHEET: 20 OF 22 — REV: C

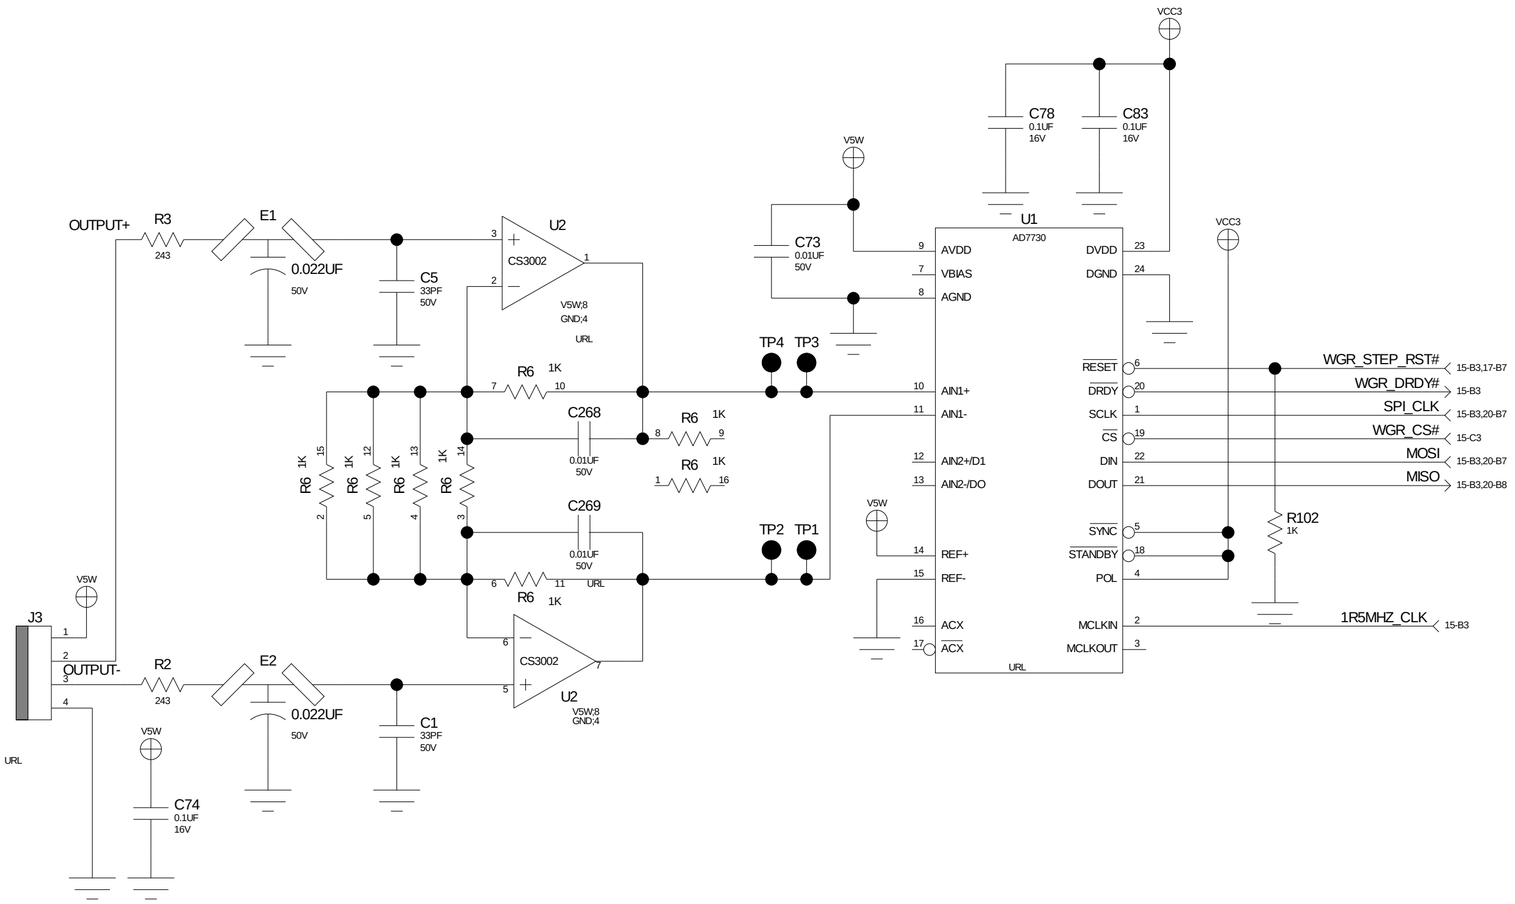

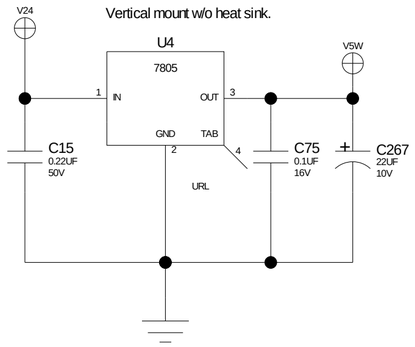

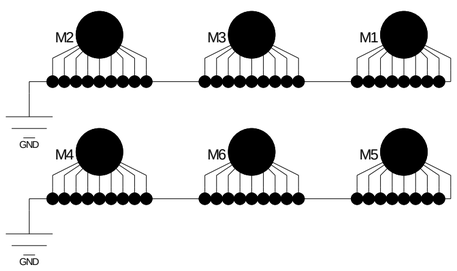


THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.

HOBART			
NAME: SCH, LXSCALE MAIN BOARD			
SUBCIRCUIT: Peripheral Controller - A/D Circuit			
VIEWLOGIC PROJECT: HLX_SCALE		FIRST USED ON: HLX_SCALE	
VIEWLOGIC FILENAME: 444635C		DCC: DS	
REF. ASSEMBLY NUMBER: 00-444635		REF. PCB NUMBER: 00-444634	
DWN BY: J. DUSING	DATE: 04-10-07	LAST UPDATE: 4-12-2007_10:55	
CHK BY: M. EBERHARDT	DATE: 04-11-07	DEV DWG:	
	SIZE: C	DRAWING NO: 00-444633	SHEET: 21 OF 22 / REV: C

AMD GEODE LOW POWER BOARD STACKUP

Board Stack-Up

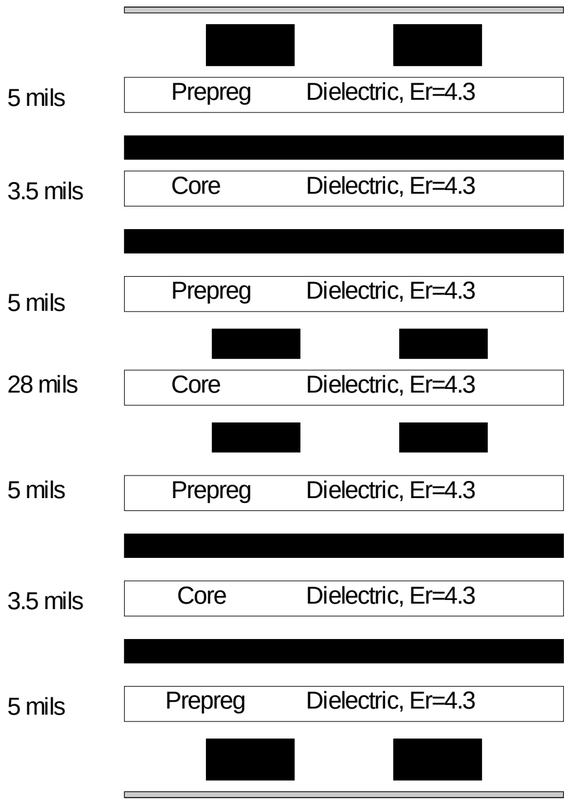

Solder Mask (1.0 mil)

1) 1.5oz Top Signal 1 (2.10 mils)

2) .5oz, Power 1 (.7 mils)

3) .5oz, Ground 1 (.7 mils)

4) .5oz, Signal 2 (.7 mils)

5) .5oz, Signal 3 (.7 mils)

6) .5oz, Ground 2 (.7 mils)

7) .5oz, Power 2 (.7 mils)

8) 1.5oz Bottom Signal 4 (2.10 mils)

Solder Mask (1.0 mil)

THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF HOBART. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THEREOF MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HOBART.

HOBART

NAME	SCH, LXSCALE MAIN BOARD
SUBCIRCUIT	Board Stack-Up
VIEWLOGIC PROJECT: HLX_SCALE	FIRST USED ON: HLX_SCALE
VIEWLOGIC FILENAME: 444635C	DCC: DS
REF. ASSEMBLY NUMBER: 00-444635	REF. PCB NUMBER: 00-444634
DWN BY: J. DUSING / DATE: 04-10-07	LAST UPDATE: 4-12-2007_10:55
CHK BY: M. EBERHARDT / DATE: 04-11-07	DEV DWG:
SIZE: C / DRAWING NO: 00-444633	SHEET: 22 OF 22 / REV: C