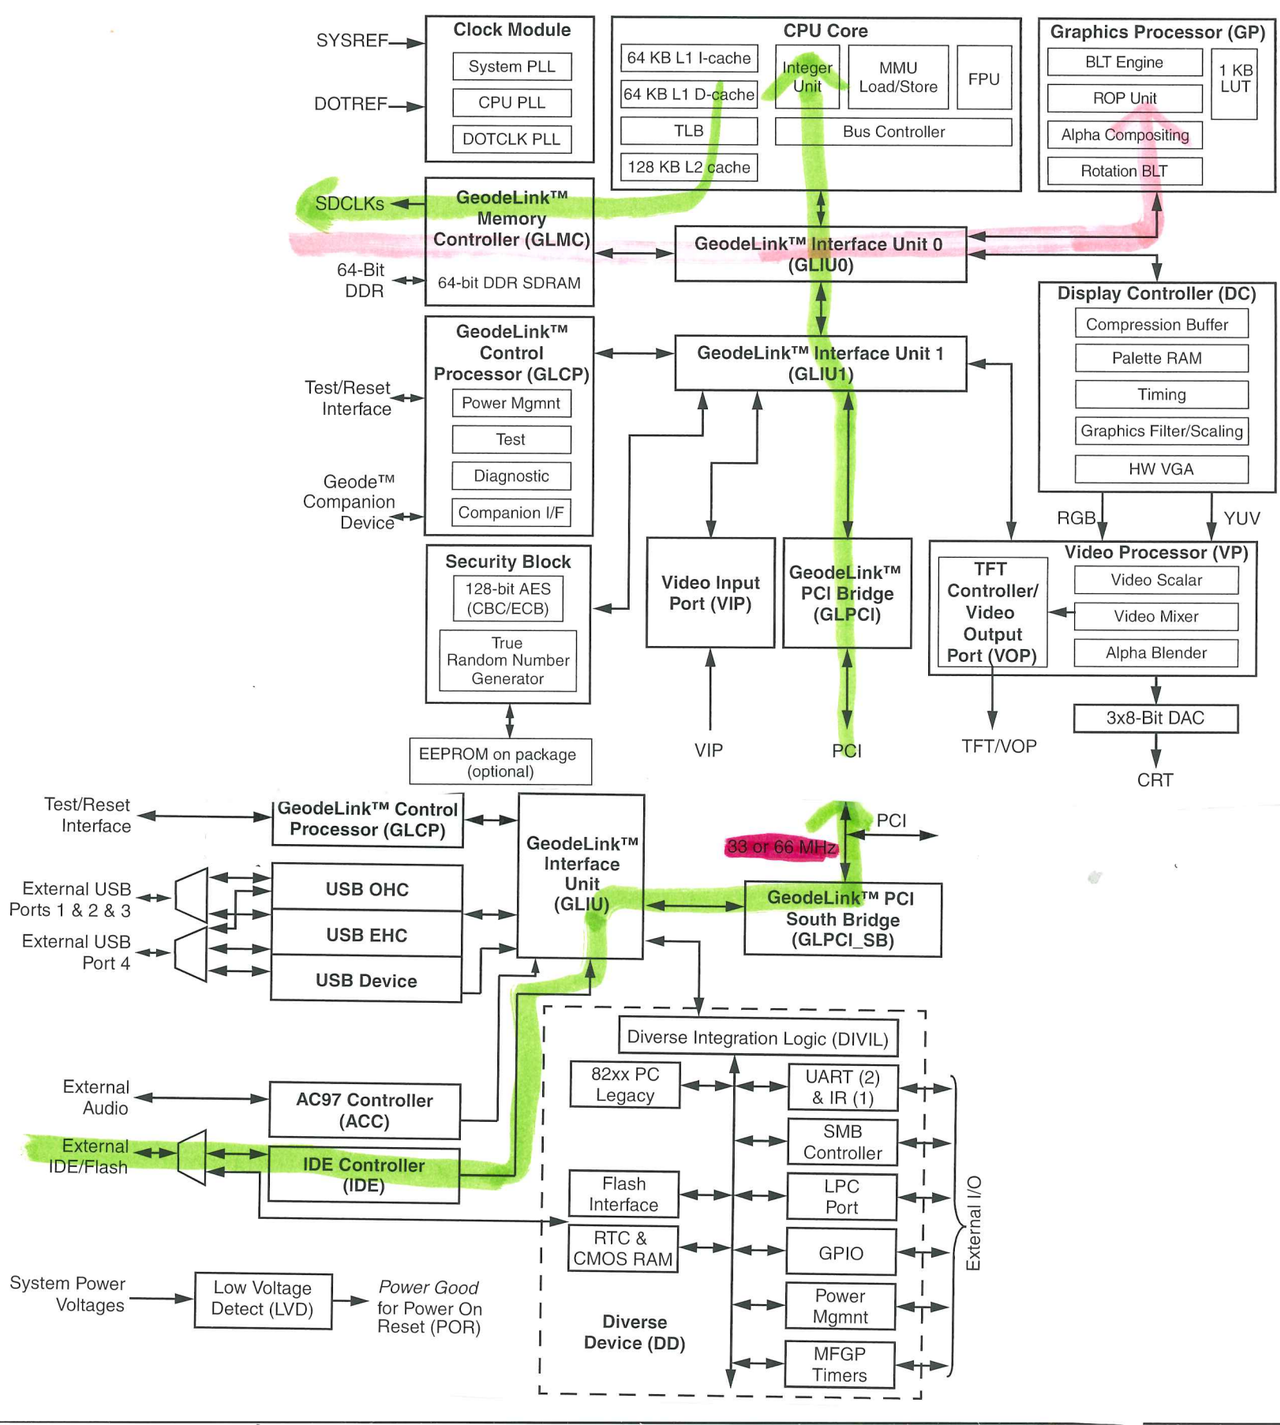

SYSREF
DOTREF
Clock Module
System PLL
CPU PLL
DOTCLK PLL
CPU Core
64 KB L1 I-cache
64 KB L1 D-cache
TLB
128 KB L2 cache
Integer Unit
MMU Load/Store
FPU
Bus Controller
Graphics Processor (GP)
BLT Engine
ROP Unit
Alpha Compositing
Rotation BLT
1 KB LUT
SDCLKs
GeodeLink™ Memory Controller (GLMC)
64-Bit DDR
64-bit DDR SDRAM
GeodeLink™ Interface Unit 0 (GLIU0)
GeodeLink™ Interface Unit 1 (GLIU1)
Display Controller (DC)
Compression Buffer
Palette RAM
Timing
Graphics Filter/Scaling
HW VGA
RGB
YUV
GeodeLink™ Control Processor (GLCP)
Test/Reset Interface
Power Mgmnt
Test
Diagnostic
Geode™ Companion Device
Companion I/F
Security Block
128-bit AES (CBC/ECB)
True Random Number Generator
EEPROM on package (optional)
Video Input Port (VIP)
GeodeLink™ PCI Bridge (GLPCI)
TFT Controller/ Video Output Port (VOP)
Video Processor (VP)
Video Scalar
Video Mixer
Alpha Blender
3x8-Bit DAC
CRT
TFT/VOP
VIP
PCI
Test/Reset Interface
GeodeLink™ Control Processor (GLCP)
GeodeLink™ Interface Unit (GLIU)
33 or 66 MHz
PCI
GeodeLink™ PCI South Bridge (GLPCI_SB)
External USB Ports 1 & 2 & 3
External USB Port 4
USB OHC
USB EHC
USB Device
Diverse Integration Logic (DIVIL)
External Audio
AC97 Controller (ACC)
External IDE/Flash
IDE Controller (IDE)
82xx PC Legacy
UART (2) & IR (1)
SMB Controller
Flash Interface
LPC Port
RTC & CMOS RAM
GPIO
Power Mgmnt
MFGP Timers
External I/O
Diverse Device (DD)
System Power Voltages
Low Voltage Detect (LVD)
Power Good for Power On Reset (POR)