PT. Yongjin Javasuka Garment	**INSTRUKSI KERJA-SEWING** ***(SEWING WORK INTRUCTION)***	**No.Dokumen : YJ-IK.SEW.0001** **Tgl.Efektif : 25 Januari 2018** **No.Revisi : 01** **Halamann : 1 Dari 1**

1 PPM (Pre-production Meeting)



Periksa dan pelajari sample garment, pastikan semua masalah sudah diklarifikasi pada saat PP meeting. Sample yang dipakai di produksi harus sample yang sudah approved.

Garment samples should be checked and any issues should be clearly resolved at the PP meeting. Samples used in production must be approved samples.


2 Persiapan sewing *(Sewing Preparation)*



Siapkan Material sheet, permintaan panel/potongan, aksesories, art work (embroidery atau printing), dan pattern. Pastikan semua material and aksesoris benar. Pastikan pattern sewing harus sudah benar dan ditandatangi oleh supervisor pattern.

Prepare material sheets, requests for panels/pieces, accessories, art work (embroidery or printing), and patterns. Make sure all materials and accessories are correct. Make sure the sewing pattern is correct and signed by the pattern supervisor.

3 Gambar dan positioning *(Image and Positioning)*

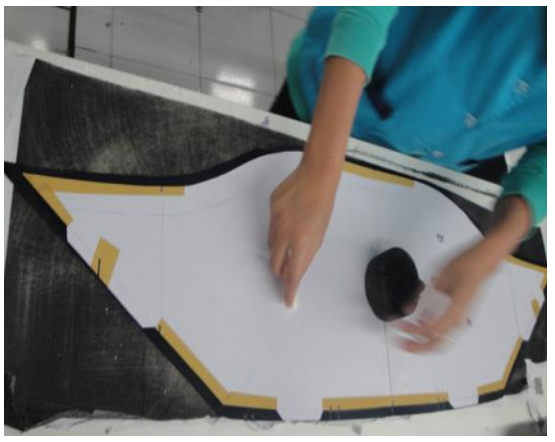

Gambar dan positioning. Semua proses gambar harus benar. Segera laporakan ke supervisor sewing jika panel atau posisi logo tidak sesuai atau salah.

Marking and positioning. All marking processes should be correct. Immediately report to the sewing supervisor if the panel or logo position is inappropriate or wrong.

4 Lay out sewing



Lay out sewing. Chief dan supervisor sewing harus mengajarkan semua proses sewing dengan benar, agar quality dan target sewing tercapai dan tidak ada permakan. Tidak boleh ada proses sewing tanpa instruksi dan arahan dari supervisor atau chief sewing

Lay out sewing. The sewing chief and supervisor must training all sewing processes correctly, so that sewing quality and targets are achieved and there is no waste. There should be no sewing process without instructions and direction from the supervisor or chief sewing

5 Pengecekan dalam proses oleh QC *(Quality control check in Production)*



QC in line harus melakukan pengecekan semua proses sewing dan pastikan semua material dan aksesoris, kontruksi, detail dan ukuran (size spec) garment benar sesuai dengan B.O.M atau original sample

In line QC must check all sewing processes and ensure that all materials and accessories, construction, details and sizes (size spec) of the garment are correct in accordance with the BOM or original sample


6 Pengecekan hasil kerja operator oleh supervisor atau chief sewing *(Quality check of operator work by Spv or chief sewing)*



Secara periodik atau berkala, chief atau supervisor harus mengecek hasil kerja setiap operator dan mengajarkan kembali jika ada operator yang hasil kerjanya tidak sesuai dengan standar quality atau tidak mencapai target.

Periodically, the chief or supervisor must check the work results of each operator and re-training them if there are operators whose work results do not comply with quality standards or do not reach targets.

7 Out put sewing

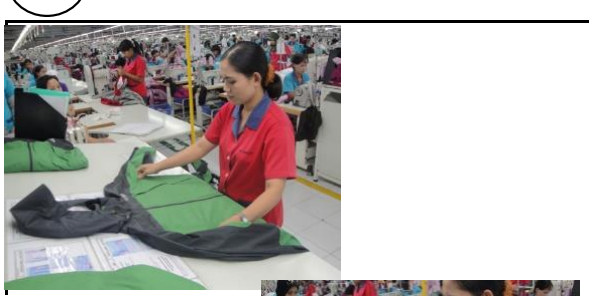



Setiap out put sewing harus di check 100% oleh final QC sewing sebelum di transfer ke finishing. Tidak boleh ada 1 pun garment yang lolos dari pengecekan QC.

All sewing output must be checked 100% by final QC sewing before being transferred to finishing.