PT YONGJIN JAVASUKA GARMENT	PROSEDUR MOCK UP *MOCK UP PROCEDURE*	No.Dokumen : YJ-IK.SEW.0007 Tgl.Efektif : 08 Februari 2018 No.Revisi : 00 Halaman : 1


Product Data Sheet TSGS Inc.

Product:

S25908-PRT5028160

Version: 1.0.0.1
Date:2014.1.22

Description: This is 2.5L PU seam tape , suitable for taping with traditional sewing.

Spec:


Composition:	Polyurethane
Color:	Grey
Weight:	Total 131 gm/m²
Substrate:	N/A
Nominal Thickness:	0.11mm+ 0.01mm Total Thickness
Hardness:	80A
Softening Point:	95℃
Melt Flow Index:	20 cg/min Condition: 175℃ & 2.16kg
Service Temperature:	-40℃ to 70℃
Washability:	Excellent up to 40℃
Recommended Sealing Conditions:	■ Hot Air Seam Sealing □ Heat Pressing Welding Temperature: 500℃ to 590℃ Wind Pressure: 0.6 kg/cm² to 0.8 kg/cm² Roller Pressure: 1.8kg/cm² to 2.4 kg/cm² Speed: 3.0m/min~5.5m/min
Abrasion Resistance	N/A
Comments:	

1. Custom slit is available upon request.
2. We strongly suggest that a sample of your fabric be sent to us for a color match prior to placing an order. A reference to a Pantone color number is also recommended.
3. Conditions may vary slightly depending on your equipment and your fabric.
4. Sealing condition is for reference only, highly recommended using the tape on the actual garment for evaluations.




1. Gunakan data sheet sebagai data acuan untuk mechanic bekerja dalam mengatur kerja mesin seam sealing
Use data sheet as reference data for mechanic work in regulating seam sealing machine work

2. Percobaan pembuatan mock up harus dilakukan pada semua warna, untuk mengetahui seam sealing bekerja baik berdasarkan data sheet yang ada. 2 set mock up harus dibuat untuk posisi single seam, T seam, atau pun cross seam sebelum produksi berjalan.
Experiment of making a mock up should be done for all colors, to know seam sealing works fine based on the data sheet there is. 2 sets of mock ups should be made for position single seam, T seam, or cross seam before production runs.

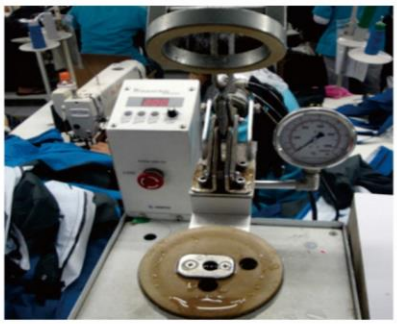

3. Setelah point 2 diatas dilakukan test kebocoran untuk memastikan tidak ada kebocoran, dan jika ada kebocoran, maka harus dilakukan pengaturan ulang
After point 2 above the leak test is done for ensure no leakage, and if there is a leak, it must be reset

4. Lakukan analisa sebelum dan sesudah cuci, jik ada masalah kebocoran, maka harus dilakukan pengaturan ulang.
Perform analysis before and after washing, if there is a problem leakage, it must be reset



5. Selama produksi mock up harus tersimpan di samping mesin
During production then the mock up must be stored next to the machine