Heat Transfer S.O.P

YJ.IK-CAD.0034



revised: 9-Jan-2024

1. Operator cutting khusus logo mengambil potongan panel yang ada tanda logo dari divisi cutting dan plot pattern dari divisi plotting.
   Cutting operator specifically for logo takes panel cut with logo marking from cutting division.

2. Operator cutting khusus logo membawa potongan panel & plot pattern ke merchandiser untuk dicek dan diberi keterangan kode item, warna, ukuran, posisi.
   Cutting operator specifically for logo brings panel cut & plot pattern to merchandiser to be checked and given a description of the item code, color, size, position.

3. Setelah dicek merchandiser, potongan panel & plot pattern diambil lalu diantar oleh operator cutting khusus logo ke divisi R&D.
4. After being checked by merchandiser, panel cut & plot pattern are taken and delivered by cutting operator specifically for logo to R&D department.

5. Estimasi waktu tunggu proses heat transfer ±30 menit.
   The estimated waiting time for the heat transfer process is ±30 minutes.

6. Jika sudah selesai proses heat transfer, operator cutting khusus logo mengambil potongan panel & plot pattern dari divisi R&D dan memberikannya ke merchandiser untuk di cek.
   When heat transfer process is finished, cutting operator specifically for logo takes panel cut & plot patterns from R&D division and gives them to merchandiser to check.


7. Setelah di cek & di approved merchandiser, kemudian potongan panel & plot pattern diberikan oleh operator cutting khusus logo kepada divisi gambar, lalu diambil oleh divisi QC comment untuk dicek berdasarkan Tech Pack, aspek yang dicek adalah kualitas, kode item, warna, ukuran, posisi.
   After being checked & approved by merchandiser, then the panel cut & plot pattern are given by cutting operator specifically for logo to drawing division, then taken by the QC comment division to be checked based on Tech Pack, the aspects checked are quality, item code, color, size, position.


8. Standar untuk suhu 150 °C, pressure 2 kg, time 10detik press pertama kemudian diulang tapi pressure 5 detik untuk press kedua.
   Standard for temperature 150 °C, pressure 2 kg, timer 10 seconds for the first press, then repeated but pressure is 5 seconds for the second press.

9. Suhu berbeda-beda bagaimana permintaan dari setiap buyer, misalkan 145°C, 160°C, 170°C sampai 190°C.
   Temperature is different dependins on the request of each buyer, for example 145°C, 160°C, 170°C to 190°C.

HEAT TRANSFER CUT PANEL & PLOT PATTERN PHOTO

(FOTO POTONGAN PANEL & PLOT PATTERN HEAT TRANSFER)

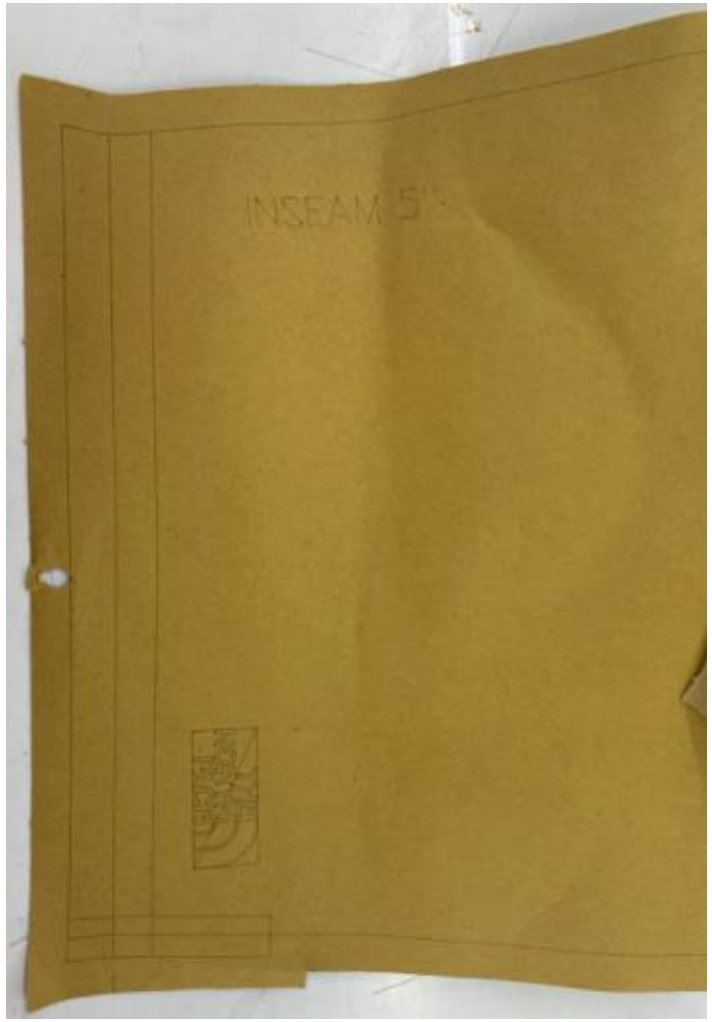

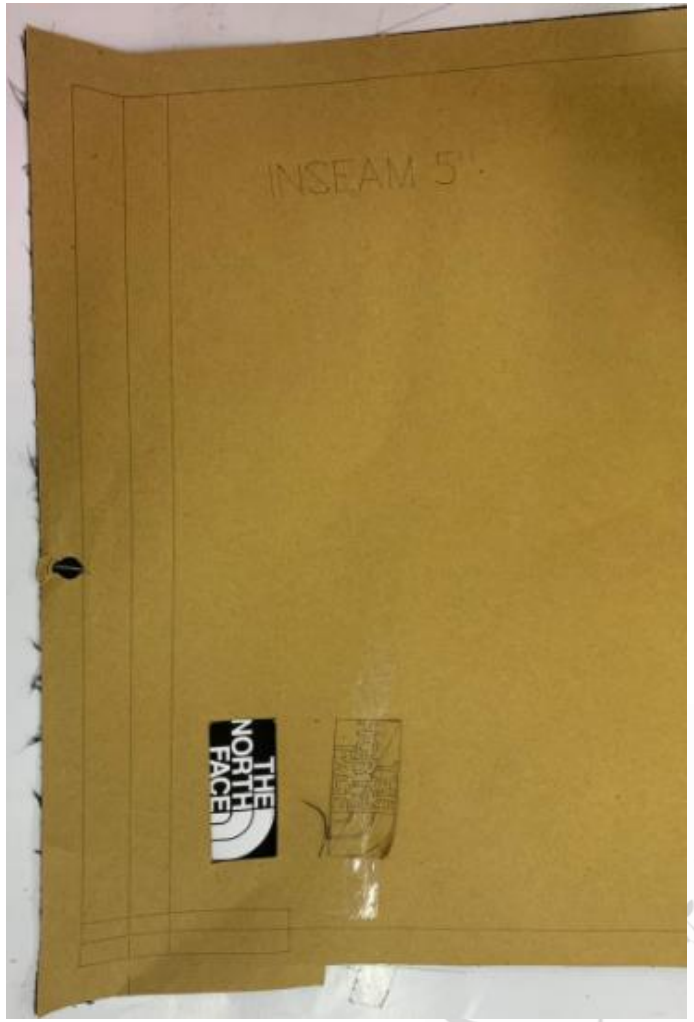

CHANGE LOG

Date	Description	Changed by
28-Jul-2023	change SOP format	Yayat
9-Jan-2024	add register # from ISO team	Yayat