


KEYNOTES

NOTE: ITEMS IDENTIFIED ARE TYPICAL TO ALL LIKE ITEMS UNLESS NOTED OTHERWISE	
<b>01 - GENERAL REQUIREMENTS</b>	10.05 SHOWER CURTAIN ROD
<b>02 - NOT USED</b>	10.06 TOWEL BAR
	10.07 ROBE HOOK
<b>03 - CONCRETE</b>	10.08 RECESSED MEDICINE CABINET, W/ FLUSH PAINTED DOOR
3.01 CONC. SLAB ON GRADE, LIGHT BROOM FINISH AT PARKING GARAGE, TYP.	10.09 FIRE EXTINGUISHER, SURFACE MOUNT IN GARAGE, RECESSED CABINET ELSEWHERE
3.02 PRE-CAST CONC. STAIR TREADS/LANDING	10.10 RECESSED, EXTERIOR UNIT ENTRY INTERCOM SYSTEM AND MOUNTING HARDWARE
3.03 CONC. STRUCT'L SLAB, SLOPE TO DRAIN AT INDICATED AREAS, BUFF FLAT/SMOOTH AND CLEAR SEAL AT LOBBY AND COMMERCIAL SPACES	10.11 GRAB BAR
3.04 CONC. WALL	<b>11 - EQUIPMENT/APPLIANCES (SEE EQMT. SCHEDULE)</b>
3.05 CONC. COLUMNS	11.01 REFRIGERATOR, CFCI
3.06 CONC. FOUNDATION	11.02 GAS RANGE/OVEN, CFCI
3.07 CONC. GUARDRAIL, 3'-7" HIGH	11.03 KITCHEN RANGE EXHAUST HOOD, CFCI
3.08 CONC. STAIR/STEPS	11.04 DISHWASHER, CFCI
3.09 6" TALL X 6" U.N.O. WIDE CONC. CURB	11.05 CLOTHES WASHER, OFCI
3.10 CONC. WHEEL STOP	11.06 DRYER, OFCI
3.11 CONC. PLANTER	11.07 TRASH CHUTES: LABEL AS 'REFUSE' AND 'RECYCLABLES'
<b>04 - MASONRY</b>	<b>12 - FURNISHINGS</b>
4.01 CMU WALL PER STRUCT'L	12.01 VERTICAL WINDOW SHADE SLATS, WHITE, TYP. @ ALL UNITS
4.02 NON-BEARING CMU WALL W/ 2" CMU CAP @ EXTERIOR LOCATION	12.02 ROLLING WINDOW SHADE. SEE DETAIL
<b>05 - METALS</b>	12.03 BICYCLE RACKS FOR LONG TERM BIKE STORAGE
5.01 STEEL COLUMN, SEE STRUCTURAL	12.04 BICYCLE RACK FOR SHORT TERM BIKE PARKING
5.02 STEEL TRELLIS, SEE STRUCTURAL	12.05 FURNITURE, MC
5.03 STEEL STAIR CHANNEL STRINGERS/SOLID RISER	<b>13 - SPECIAL CONSTRUCTION (NOT USED)</b>
5.04 STEEL PIPE HANDRAIL, PAINTED	<b>14 - CONVEYING EQUIPMENT</b>
5.05 5" DIA. CONCRETE FILLED GALV. PIPE BOLLARD PER 9A9.31	14.01 THYSSENKRUPP ENDURA HOLELESS HYDRAULIC ELEVATOR, 5,000 LBS., 150 FPM
5.06 GUARDRAIL, PAINTED, MIN 3'-6" HIGH ABOVE FINISH DECK. SEE DETAILS	<b>21 - FIRE SUPPRESSION</b>
5.07 2X8 MTL. STUD, FURRED PLUMBING WALL	21.01 NFPA 13 FIRE SPRINKLER RISER AT EACH STAIR, RECESSED
5.08 METAL, STL. WALL FRAMING, TYP. @ GROUND FLOOR	21.02 FIRE SPRINKLER HORIZ. MAIN (SEE DIAGRAM)
<b>06 - WOODS &amp; PLASTIC</b>	21.03 ROUND FIRE ALARM BELL, ARCHITECT SHALL APPROVE FINAL LOCATION
6.01 WOOD POST	21.04 FIRE DEPARTMENT MAIN CONNECTION @ FRONT OF PROJECT, ARCHITECT SHALL APPROVE FINAL LOCATION
6.02 WOOD BEAMJOIST	21.05 FD ANNUNCIATOR PANEL.
6.03 WOOD WALL FRAMING WITH PLY SHEAR WHERE OCCURS	<b>22 - PLUMBING</b>
6.04 WOOD TUFF FLOOR JOIST	22.01 MOP SINK
6.05 MIN. 5/8" PLY OVER 2X WD RIP STRIPS FOR ROOF SLOPE AND/OR CRICKET	22.02 KITCHEN SINK/FAUCET
6.06 RUBBER WALL BASE	22.03 LAV. SINK/FAUCET
6.07 SOLID SURFACE COUNTERTOP BY 'LG HI-MACS', BLACK TYP. @ KITCHENS, BATHROOMS, AND LAUNDRY ROOM	22.04 PRE-FAB FIBERGLASS BATHTUB
6.08 WOOD WALL BASE, PAINTED	22.05 BATH TUB FAUCET
6.09 WOOD CABINETS: BEECH FACES, SOLID FLAT DOORS, EUROPEAN CONCEALED HINGES AND SELF CLOSE DRAWERS. CASEWORK SHALL BE 'CUSTOM GRADE' FOR MATERIAL, HARDWARE, JOINERY AND INSTALLATION, TYP.	22.06 SHOWER HEAD AND CONTROLS
6.10 WOOD MDF SHELF	22.07 ULTRA LOW FLOW TOILET
6.11 WOOD POLE CLOTHES ROD, DOUGLAS FIR, 1-3/8" DIA, PAINTED	22.08 BOILER PER PLUMBING DWGS
<b>07 - THERMAL &amp; MOISTURE PROTECTION</b>	22.09 HOT WATER TANK PER PLUMBING DWGS
7.01 DECK COATINGS OVER STRUCTURAL SLAB OR PLYWOOD	22.10 ROOF DRAIN OVERFLOW DAYLIGHT SCUPPER, REFER TO DETAIL 11/A9.02
7.02 THERMAL BATT INSULATION, R-21MIN @ WALLS, R-38 MIN @ ROOF	22.11 FLOOR DRAIN
7.03 W.P. MEMBRANE	22.12 PLUMBING VENT PIPE
7.04 VAPOR PERMEABLE MEMBRANE AIR BARRIER AT EXTERIOR WALLS, TYP.	<b>23 - HEATING, VENTILATING, AND AIR-CONDITIONING</b>
7.05 SINGLE-PLY PVC WHITE SHEET ROOFING	23.01 HVAC UNIT PER MECH
7.06 FLOOR OR DECK DRAIN	23.02 AIR REGISTER WALL MOUNTED
7.07 SCUPPER	23.03 CEILING AIR REGISTER
7.08 UNDERSLAB MOISTURE VAPOR BARRIER	23.04 KITCHEN HOOD EXHAUST DUCT
7.09 ROOF DRAIN	23.05 ENERGY STAIR RATED BATHROOM EXHAUST FAN PER SPECS
7.10 18 GA. 'BONDERIZED' METAL COPING, PTD, TYP. AT ALL FRAMED PARAPETS	23.06 BATHROOM EXHAUST DUCT
7.11 PLASTER CONTROL JOINT PER DETAIL	23.07 MECH. EXHAUST LOUVER, PER MECH.
<b>08 - OPENINGS (SEE DOOR/WINDOW SCHEDULE)</b>	<b>26 - ELECTRICAL</b>
8.01 VINYL WINDOW, PER SPECS	26.01 ROOF AREA FOR FUTURE SOLAR SYSTEM PER 2018 CBC SECT. 110.10.0(b) PROVIDE CONDUIT TO ROOF FOR FUTURE SOLAR SYSTEM
8.02 ALUM. STOREFRONT, PER SPECS.	26.02 FUTURE ELECTRICAL VEHICLE CHARGING STATION
8.03 TRANSOM WINDOW, PER SPECS.	26.03 ELEC. PANEL PER PLANS & SCHEDULE
8.04 ALUM. STOREFRONT DOOR, PER SPECS	26.04 EXTERIOR LIGHT PER SCHEDULE
8.05 STL. DOOR & FRAME, PER SPECS.	26.05 INTERIOR LIGHT PER SCHEDULE
8.06 SLIDING DOOR, PER SPECS	<b>27 - COMMUNICATION</b>
8.07 SOLID WOOD DOOR, SPEC SPECS	<b>28 - ELECTRONIC SAFETY AND SECURITY</b>
8.08 INTERIOR WOOD DOOR, PER SPECS	28.01 SMOKE ALARM
8.09 CLOSET DOOR, PTD	28.02 SECURITY CAMERA
8.10 ACCESS PANEL, COLOR AND MATERIAL SHALL MATCH ADJACENT MATERIAL	28.03 FIRE ALARM MAIN PANEL, ARCHITECT SHALL APPROVE FINAL LOCATION
8.11 DOOR HARDWARE SET PER SCHEDULE	<b>31 - EARTHWORK</b>
8.12 EXTERIOR WALL LOUVER	31.01 APPROVED COMPACT FILL PER GEO AND SOIL ENGINEER REPORT
8.13 EXTERIOR WALL VENT CAP	<b>32 - EXTERIOR IMPROVEMENTS</b>
<b>09 - FINISHES (SEE FINISH SCHEDULE)</b>	32.01 NEW CONCRETE SIDEWALK
9.01 NOT USED	32.02 PARKING STALL STRIPING PER CITY OF LA REQUIREMENTS
9.02 7/8" PERFORATED CORRUGATED MTL. ALUM. PANELS, PTD.	32.03 EPIC STORM WATER SYSTEM, SEE CIVIL
9.03 7/8" INTEGRAL COLOR EXT. CEMENT PLASTER OVER MTL. LATH & BUILDING PAPER. SEE ELEVATIONS/DETAILS FOR 'SPARKLE' ADDITIVE AND FURRED SCALLOPING	32.04 STEEL SECURITY GATE, PTD.
9.04 5/8" TYPE 'X' GYP BOARD, TYP. PROVIDE AS 'EXTERIOR' OR 'WET RATED' AS REQUIRED	32.05 STEEL SECURITY FENCE, PTD.
9.05 NOT USED	32.06 EXTERIOR PLANTER DRAIN
9.06 VINYL PLANK FLOORING	32.07 MOTORIZED STL. OVERHEAD GATE
9.07 CERAMIC TILE	32.08 IPE WOOD TILES
9.08 GRAFFITI COATING, TYP. @ ALL EXTERIOR SOLID WALLS FROM GRADE UP TO SECOND FLOOR DECK	32.09 TREE, SEE LANDSCAPE DRAWINGS
9.09 2' X 2' ACOUSTICAL SUSPENDED CEILING SYSTEM	32.10 PLANTINGS, SEE LANDSCAPE DRAWINGS
9.10 SUSPENDED GYP. BOARD CEILING	<b>33 - UTILITIES</b>
<b>10 - SPECIALTIES (SEE SPECS/ACCESSORY SCHEDULE)</b>	33.01 WATER METER
10.01 MIRROR, WALL MOUNTED	33.02 GAS METER, PROTECT W/ BOLLARDS AS REQUIRED
10.02 SIGNAGE	33.03 ELECTRIC METERS
10.03 MAILBOXES, FRONT LOAD, RECESSED. PROVIDE FOR 35 UNITS PLUS 2 COMM. TOILET PAPER ROLL HOLDER	33.04 DOMESTIC WATER BACKFLOW PREVENTER
	33.05 FIRE-METER BACKFLOW PREVENTER
	33.06 IRRIGATION BACKFLOW PREVENTER
	33.07 ELECTRICAL TRANSFORMER IN UNDERGROUND VAULT
	33.08 SUMP PUMP PER CIVIL

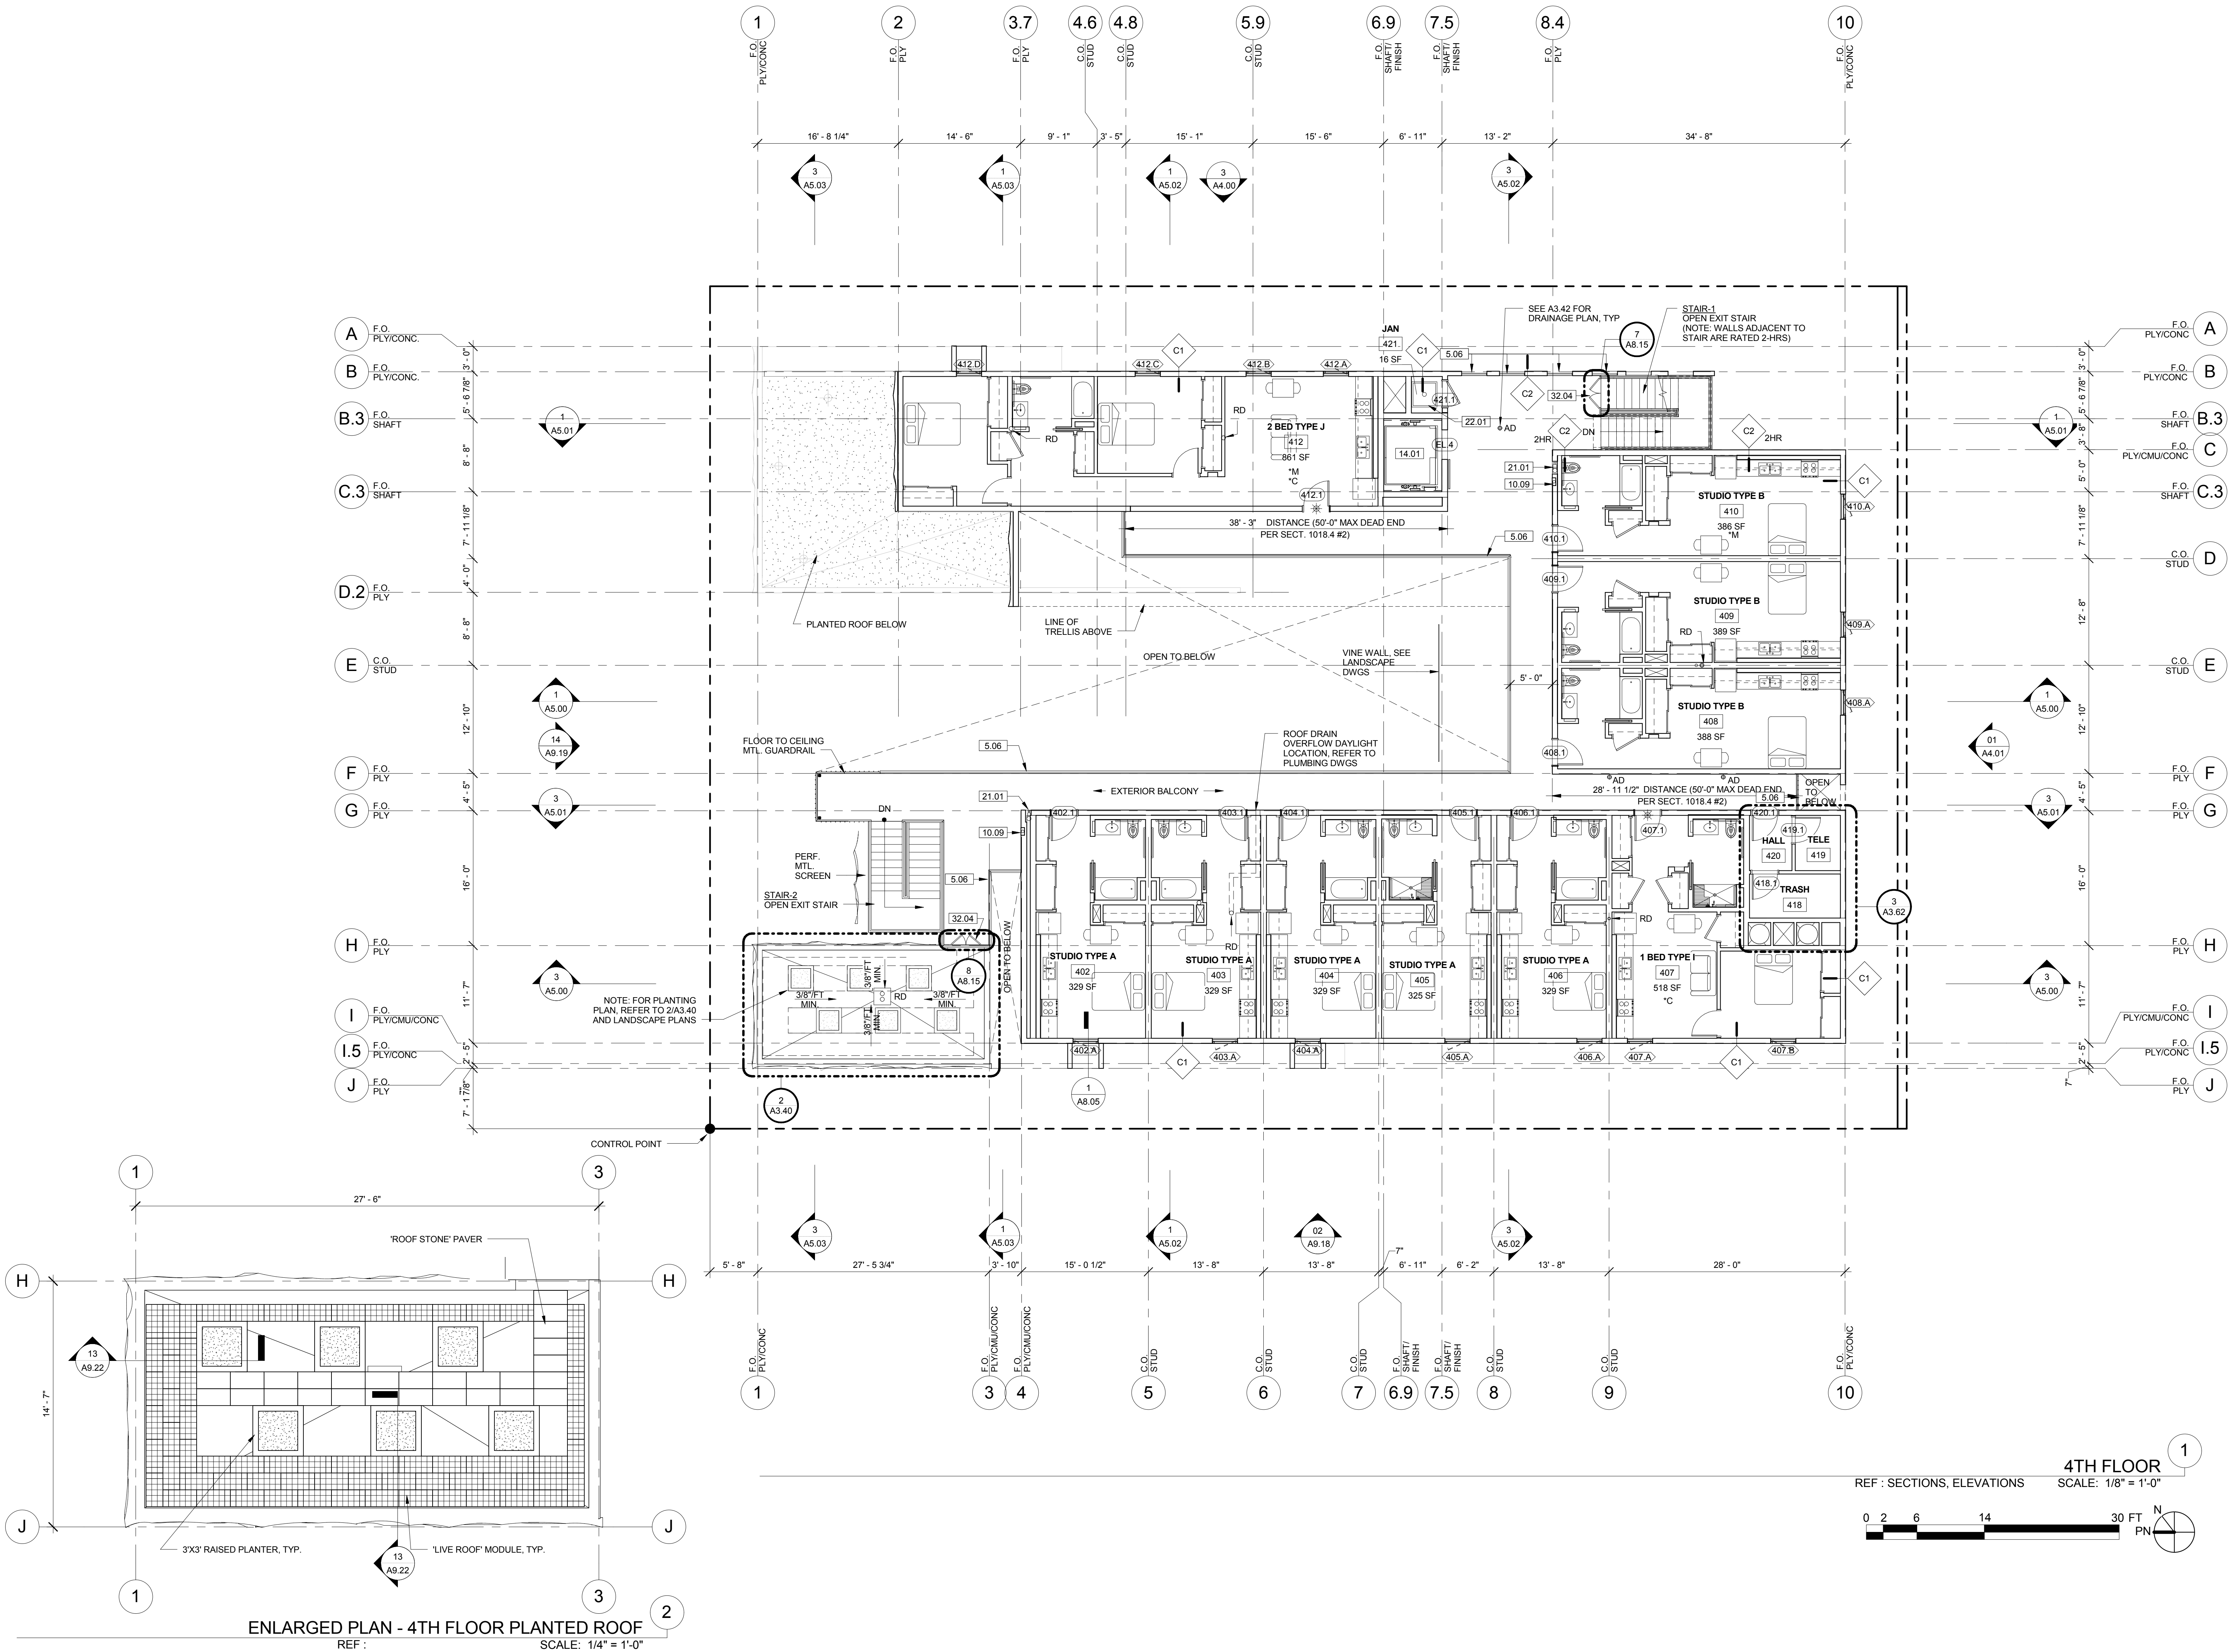

ENLARGED PLAN - 4TH FLOOR PLANTED ROOF  
REF: SCALE: 1/4" = 1'-0"

GENERAL NOTES

- SEE ENLARGED PLANS FOR ADDITIONAL DIMENSIONS AND NOTES, SEE A0.12 FOR STRIPING OF EV SPACE AND ADDITIONAL NOTES.
- ALL DIMENSIONS ARE TO FACE OF STUD UNLESS NOTED OTHERWISE. GRID DIMENSIONS ARE TO FACE OF PLY, FACE OF SHAFT, OR CENTERLINE OF WALL/COLUMN UNLESS NOTED OTHERWISE.
- FOR DRAINAGE PLAN AND FLOOR ELEVATIONS, SEE SLAB OR DRAINAGE PLAN.
- DOUBLE STRIPING OF STALLS FOR COMMERCIAL SHALL BE PER FIG. 7 OF THE CITY OF LA BLDG. DEPT. STANDARDS. DOUBLE STRIPING OF STALLS FOR RESIDENTIAL STALLS SHALL BE PER ZONING CODE SECTION 12.21A5, CHART NO.5. SEE SHEET A0.12.
- FOR BOLLARDS AT ELECTRICAL METERING EQUIPMENT, SEE 9A9.31

- THE CONSTRUCTION SHALL NOT RESTRICT A FIVE-FOOT CLEAR AND UNOBSTRUCTED ACCESS TO ANY WATER OR POWER DISTRIBUTION FACILITIES (POWER POLES, PULL-BOXES, TRANSFORMERS, VAULTS, PUMPS, VALVES, METERS, APPURTENANCES, ETC.) OR TO THE LOCATION OF THE HOOKUP. THE CONSTRUCTION SHALL NOT BE WITHIN TEN FEET OF ANY POWER LINES WHETHER OR NOT THE LINES ARE LOCATED ON THE PROPERTY. FAILURE TO COMPLY MAY CAUSE CONSTRUCTION DELAYS AND/OR ADDITIONAL EXPENSES.
- AN APPROVED SEISMIC GAS SHUTOFF VALVE WILL BE INSTALLED ON THE FUEL GAS LINE ON THE DOWN STREAM SIDE OF THE UTILITY METER AND BE RIGIDLY CONNECTED TO THE EXTERIOR OF THE BUILDING OR STRUCTURE CONTAINING THE FUEL GAS PIPING. (PER ORDINANCE 170.158) (INCLUDES COMMERCIAL, ADDITIONS AND TI WORK OVER \$10,000.) SEPARATE PLUMBING PERMIT IS REQUIRED.
- PROVIDE PIPE PROTECTION AT GARAGE PER 5A/9.31

- SHOWER COMPARTMENTS AND WALLS ABOVE BATHTUBS WITH INSTALLED SHOWER HEADS SHALL BE FINISHED WITH A SMOOTH, NONABSORBENT SURFACE TO HEIGHT NOT LESS THAN 70 INCHES ABOVE THE DRAIN INLET. SECTION 1210.2.3 USE OF WATER-RESISTANT GYPSUM BACKING BOARD SHALL BE AS STATED IN SECTION 2509.3
- WATER HEATERS MUST BE STRAPPED TO A WALL (SEC. 507.3, UPC)
- PROVIDE PIPE PROTECTION AT GARAGE PER 5A/9.31

PLAN LEGEND

- |  |   |
|--|---|
|  | NEW CONCRETE WALL PER STRUCTURAL  |
|  | NEW MASONRY WALL, PAINT PER SPECS. SEE PLANS & DETAILS FOR VARIOUS WALL TYPES |
|  | NEW STUD WALL, PAINT PER SPECS. SEE PLANS & DETAILS FOR VARIOUS WALL TYPES    |
|  | (N) SCORED CONC. SLAB / PAVING  |
|  | (N) LANDSCAPE / PLANTING AREA   |
|  | (N) WATER CURTAIN   |
|  | RECESSED HOSE BIB   |
|  | RECESSED LIGHT FIXTURE  |

**BROOKS SCARPA**

REVISIONS:

SHEET TITLE: 4TH FLOOR PLAN  
SCALE: As indicated  
DATE PRINTED: 2/28/2019 4:33:23 PM

ALL DRAWINGS AND WRITTEN MATERIAL APPEARING HEREIN CONSTITUTE ORIGINAL AND UNPUBLISHED WORK OF THE ARCHITECT AND MAY NOT BE DUPLICATED, USED OR DISCLOSED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT.

BROOKS SCARPA ARCHITECTURE  
3929 W. 139TH STREET  
HAWTHORNE, CA 90250  
t: 323.596.4700  
f: 310.453.9606

A3.40