

TO BE READ IN CONJUNCTION WITH THE
SPECIFICATION (DOI-065001)

FIRE DOORS & FRAME
TO COMPLY WITH THE
AND THE RECOMMEN
TO ORDER / MANUFA
DRAWINGS FOR FIRE
DOORSETS TO BE SU
DOCUMENTARY EVID

- DESTRUCTIVE FIRE TESTS (BSEN 1634 AND 1635)
- 1987 AND CARRIAGE
- LABORATORY OF
- ASSESSMENT (LE)
- QUALIFIED FIRE S
- SUPPLIED. DETAIL
- FRAMES/ FIRE DO
- GLOBAL ASSESS
- YEARS OLD) BY C
- ENGINEER SHOW
- AND
- DOCUMENTARY
- DATA (WHERE AP
- 476; PART 31.1 TO

ESSENTIAL IRONMO

- SELF CLOSING DOORS
 - HINGES
 - LOCKS & LATCHES
- TO BE OF SAME TYPE
ASSESSED.
ALL TO BE FITTED ST
RELEVANT TEST CR
AROUND IRONMONG

- TO BE OF SAME TYPE AND MATERIAL AS THE ONE BEING ASSESSED.
- TO BE FITTED TO THE SURFACE OF THE COMPONENT IN A MANNER THAT REPRODUCES THE RELEVANT TEST SURFACE TOGETHER WITH THE SURROUNDING AREA AROUND THE IRONMOUNT.

- TO BE OF SAME TYPE AND THICKNESS AS THE EXISTING GLASS BEING REPLACED
- PROPRIETARY GLASS SHALL BE REPLACED WITH APPROPRIATE GLASS
- BEAD PROFILES SHALL BE REPLACED WITH SPECIFIC TO THE GLASS TYPE
- ALL FIRE RATED GLASS SHALL BE MARKED WITH SPECIFIC FIRE RATING AND INSULATION AND


**INSTALLATION;
DOORS & FRAMES / I
REGISTERED INSTAL**

- INDEPENDENT THIRD**
- DOOR / SET MAN
 - DOOR BLANK SU
 - FABRICATOR
 - REGISTERED INS
 - TO BE SUPPLIED

ALL FIRE DOORS SHALL HAVE A PLATE STATING: 1) FIRE RESISTANCE, 2) MANUFACTURE, 3) MODEL NUMBER, 4) AUTHORITY/ ASSESSMENT. THE REQUIREMENTS SHALL APPLY TO FIRE RESISTANCE. THE STRUCTURAL OPENINGS SHALL BE PROTECTED BY APPROPRIATE ROCK WOOL INSULATION. ROCK FOAMS TO BE AVOIDED.

ALL DOORS TO COME
REGARD TO;
- LOCATING OF IRON
- CLEAR OPENING W
- VISION PANELS
- MARKINGS / MANIF

ALL OPES TO BE VER
FABRICATION OF DC

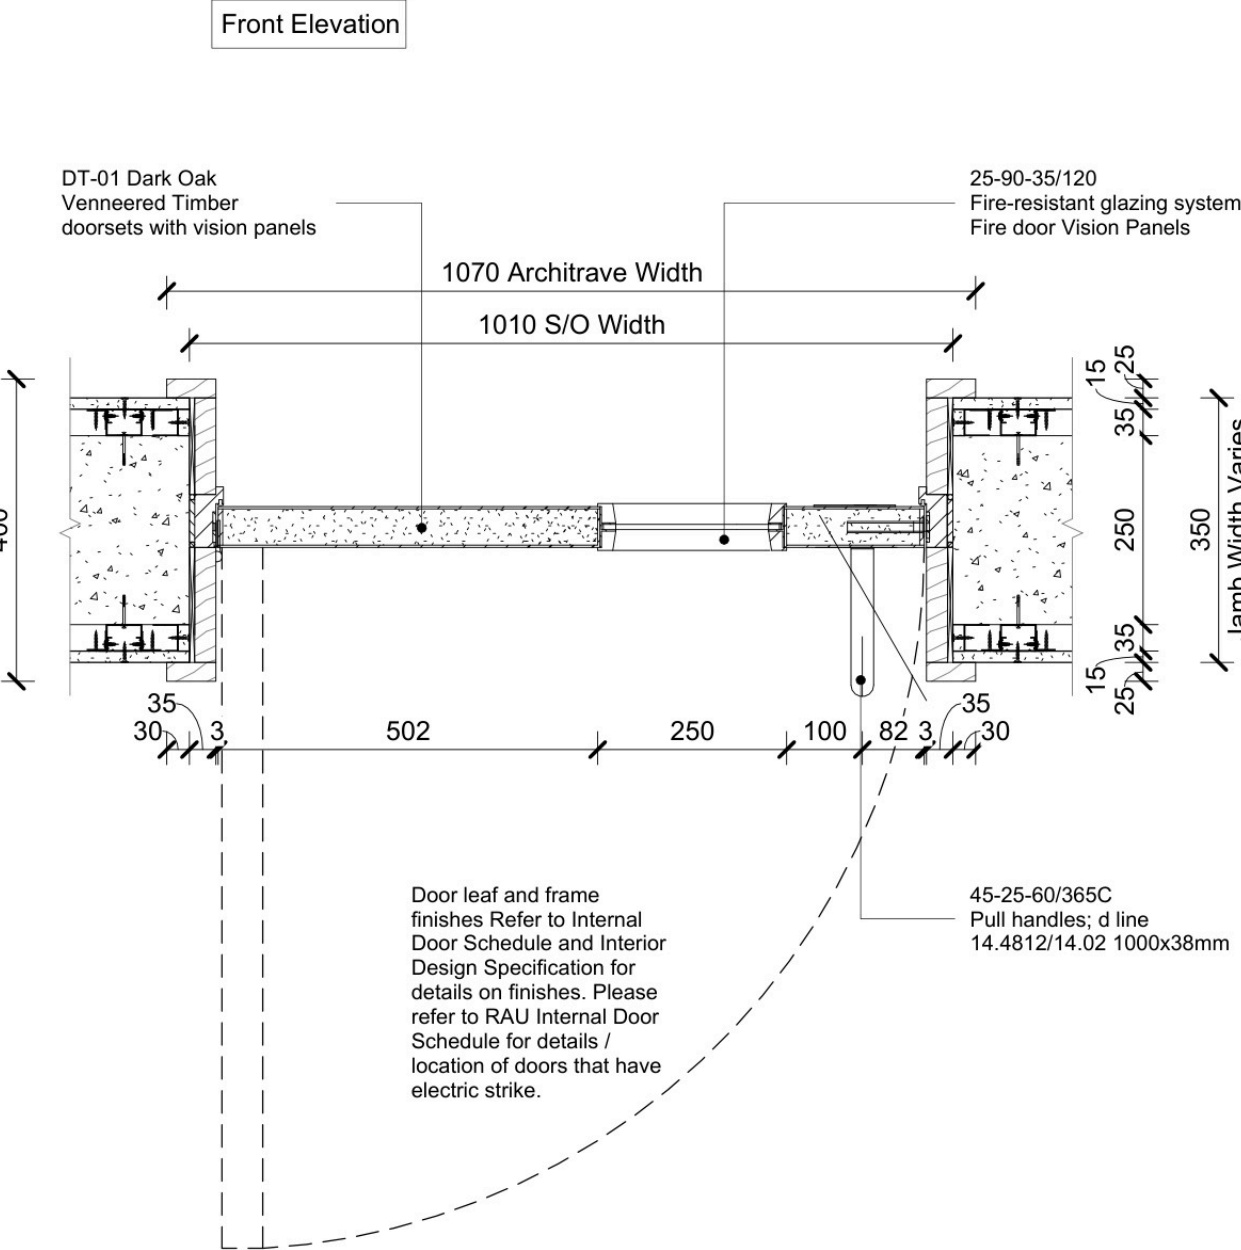

Front Elevation



Rear Elevation



Section



Plan