


## PRODUCT CONFIGURATION

# Actuator LA23

Item No: J30568  
Item Name: 2304013021020B6  
Protection Class: IPx6  
Load Type: Push/Pull  
Load: 900 N / 900 N  
Self Lock: 900 N / 900 N  
Speed: 9,40 mm/s  
Stroke length: 20 mm.  $\pm$  2 mm  
Installation Dimension: 160 mm.  
Voltage: 24 V  
Colour: Black (RAL 9005), Black outer tube  
Safety Nut: False  
Mechanical Spline: None  
Platform: None  
Feedback: Hall Potentiometer  
Voltage: 0 - 10V  
Potential Free EndStop : Yes  
Piston Rod Eye: WithSlot,  $\varnothing$ 10.1  
Piston Rod Eye with Bushing: False  
Back Fixture: WithSlot,  $\varnothing$ 12.3  
Back Fixture Material: Zinc Coated Steel  
Back Fixture with Bushing: False  
Back Fixture Orientation: 0° Clockwise

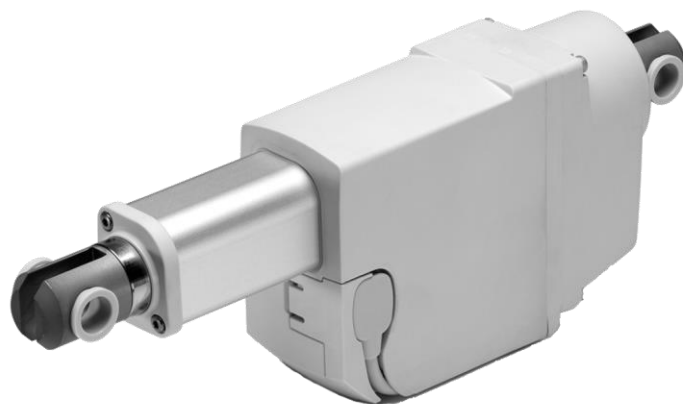

### Precaution ! :

The cable and the cable lock for the LA23 are not parts of the actuator therefore they must be ordered separately. A list of various cables and cable lock are available in SBU 5.15

### Terms of use

The user is responsible for determining the suitability of LINAK products for specific application. LINAK takes great care in providing accurate and up-to-date information on its products. However, due to continuous development in order to improve its products, LINAK products are subject to frequent modifications and changes without prior notice. Therefore, LINAK cannot guarantee the correct and actual status of said information on its products. While LINAK uses its best efforts to fulfil orders, LINAK cannot, for the same reasons as mentioned above, guarantee the availability of any particular product. Therefore, LINAK reserves the right to discontinue the sale of any product displayed on its website or listed in its catalogues or other written material drawn up by LINAK. All sales are subject to the Standard Terms of Sale and Delivery for LINAK. For a copy hereof, please contact LINAK



WE IMPROVE YOUR LIFE