
Decorative Diffuser AC

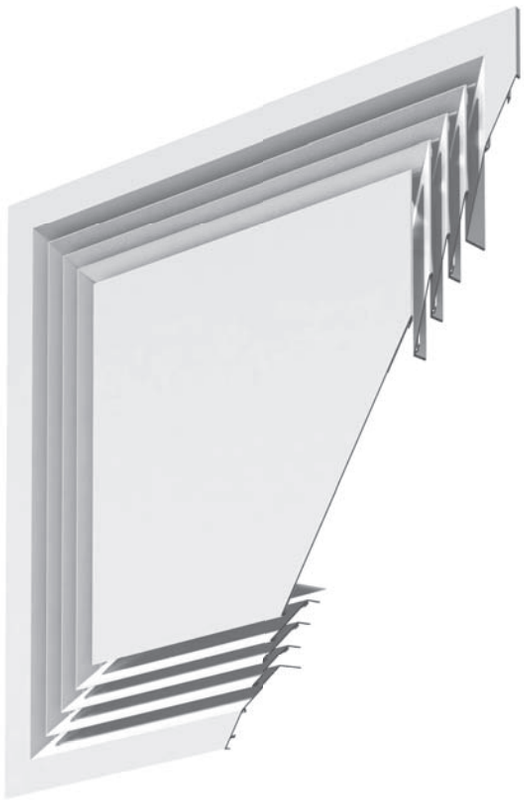

Description
Rectangular diffuser, paneled ceiling type, with four direction air jet diffuser.


Application
Supply or exhaust of the airflow.

Characteristics
Preferred for paneled ceiling, 600 x 600 mm diffuser with 1, 2, 3 or 4 outlying slots around the square core.
Removable central core.
The air flow can be adjusted by mounting an air control damper **OBD** on the diffuser inlet.
Uniform aspect with adjacent diffusers.

Accessories
Air control damper with opposable blades **OBD.**
Insulated/non-insulated adaptor **ADP IZ/N.**

Materials and finishing
Extruded shaped aluminum blades , electrostatic field painted white RAL 9016
Other RAL colors available on request.

Technical design

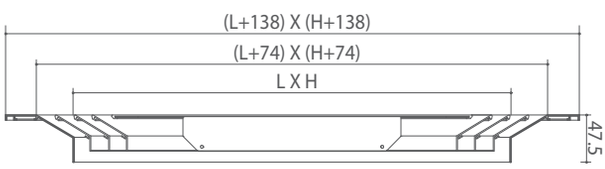

Assembly Methods
Paneled ceiling 600 x 600 mm (standard)
Mounting holes for diffuser connection (optional)

Selection table AC

Air flow (m^3/h)	No. slots	595 X 595			
		1	2	3	4
	Ak(mp)	0.022	0.039	0.048	0.055
90	Veff[m/s] NR [dB(A)] ΔPt [pa] X [m]	1.12 22.00 3.00 1.80			
125	Veff[m/s] NR [dB(A)] ΔPt [pa] X [m]	1.56 28.00 6.00 2.10			
180	Veff[m/s] NR [dB(A)] ΔPt [pa] X [m]	2.24 35.00 12.00 2.60			
250	Veff[m/s] NR [dB(A)] ΔPt [pa] X [m]	3.11 42.00 24.00 3.60	1.79 25.00 17.00 2.40		
320	Veff[m/s] NR [dB(A)] ΔPt [pa] X [m]	3.99 47.00 40.00 4.80	2.30 34.00 29.00 3.00	1.84 20.00 8.00 2.40	
430	Veff[m/s] NR [dB(A)] ΔPt[pa] X [m]		3.09 45.00 51.00 4.20	2.48 30.00 14.00 3.20	2.17 26.00 11.00 2.80
540	Veff[m/s] NR [dB(A)] ΔPt [pa] X [m]		3.88 55.00 80.00 5.20	3.11 38.00 21.00 4.00	2.73 33.00 17.00 3.60
650	Veff[m/s] NR [dB(A)] ΔPt [pa] X [m]			3.75 45.00 31.00 4.80	3.28 39.00 24.00 4.20
750	Veff[m/s] NR [dB(A)] ΔPt [pa] X [m]			4.32 52.00 42.00 5.60	3.79 44.00 33.00 5.00
850	Veff[m/s] NR [dB(A)] ΔPt [pa] X [m]				4.29 49.00 43.00 5.60

Annotation

* Ak [m²] - Free surface of the diffuser
* Veff[m/s] - Air velocity in diffuser
* NR [dB(A)] - Noise level without room attenuation
* ΔPt [pa] - Pressure loss inside diffuser
* X [m] - Airflow length
* Vk = 0.2 m/s - Speed at which airflow length was calculated "x" [m]

NR < 35 | 35≤NR≤45 | NR>45

Order codes

Type - Number of slots + **OBD** + **ADP IZ/N** / **Dimensions** / **L X H** / **O**

- **AC**
- 1, 2, 3
- Air control damper
- Insulated/non-insulated adapter
- **L X H** 595 x 595
- Other dimensions on request
- **0** Painted white RAL 9016
- **R** Other RAL paints…