Access Grille AD




Description
Aluminum access door is used in areas where regular access is required for installation works maintenance.

Application
To access the desired maintenance area.

Characteristics
Suitable for wall or ceiling mounting.
The access door is provided with countersunk holes for mounting the visible frame .
Size 595 x 595 mm (for paneled ceiling) is provided without mounting holes.
Opening/closing the door is done by pushing a click type system.

Materials and finishing
Extruded aluminum material, electrostatic field painted white RAL 9016.
Pickled steel sheet.
Other RAL colors available on request.

Technical design

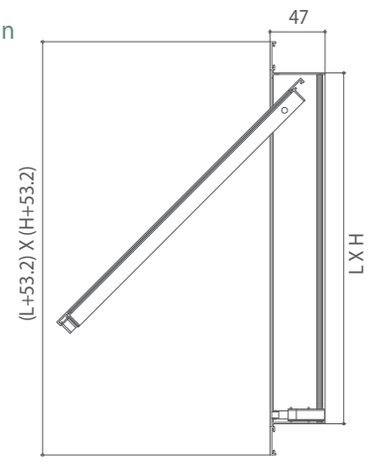

Assembly Methods
Mounting countersunk holes on the visible frame (standard)
Mounting holes on the connection frame inlet (optional)

Order codes

Type	/	Dimensions	/	0
AD		On request		0 Painted white RAL 9016 R Other RAL paints