
Ceiling Diffuser CD-CK

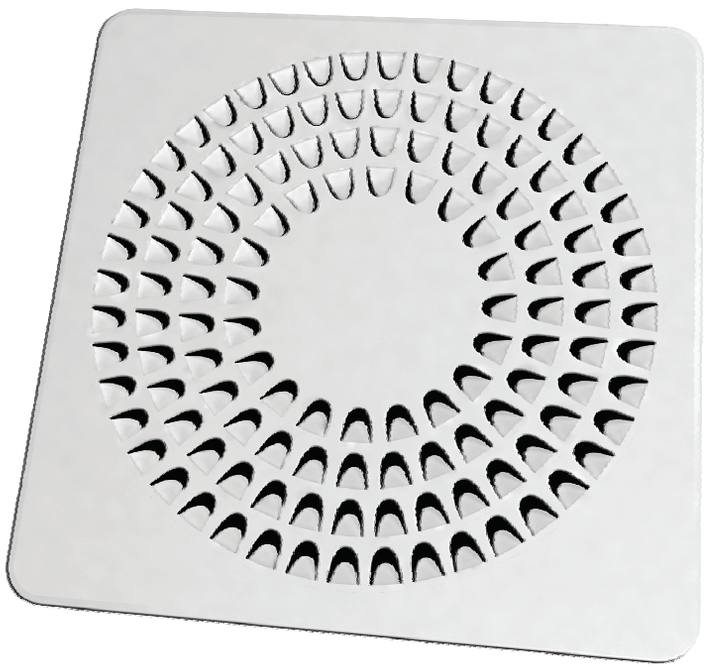

Description
Square diffuser preferred for paneled ceiling mounting.


Application
Supply/ exhaust of airflow.

Characteristics
Specifically designed for paneled ceiling mounting - size 600 x 600 mm.
Keeps a uniform aspect with adjacent diffusers.
Connects to the air ducts through the adapter.
The diffuser is delivered with fitting gaskets.

Accessories
Insulated/ Non-insulated adapter **ADP IZ/N**.

Materials and finishing
Pickled steel sheet electrostatic field painted white RAL 9016
Other RAL colors available on request

Technical design

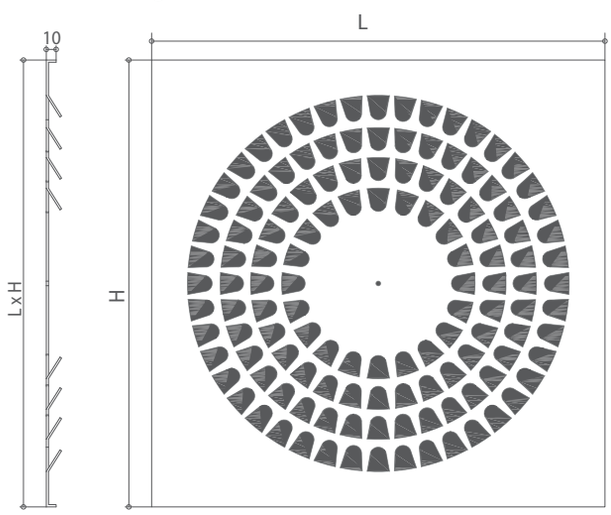

Assembly Methods
Paneled ceiling 600 x 600 mm

Selection table CD-CK

Supply

Air flow (m^3/h)	LxH	595 X 595
480	X [m] NR [dB(A)] ΔPt [pa]	5.7 5.0 7.0
540	X [m] NR [dB(A)] ΔPt [pa]	6.3 10.0 8.0
610	X [m] NR [dB(A)] ΔPt [pa]	7.2 20.0 10.0
720	X [m] NR [dB(A)] ΔPt [pa]	8.5 25.0 15.0
890	X [m] NR [dB(A)] ΔPt [pa]	11.0 32.0 22.0
1010	X [m] NR [dB(A)] ΔPt [pa]	13.0 35.0 28.0
1200	X [m] NR [dB(A)] ΔPt [pa]	14.0 40.0 40.0
1315	X [m] NR [dB(A)] ΔPt [pa]	16.0 45.0 50.0

Exhaust

Air flow (m^3/h)	LxH	595 X 595
480	NR [dB(A)] ΔPt [pa]	15.0 7.5
540	NR [dB(A)] ΔPt [pa]	22.0 9.0
610	NR [dB(A)] ΔPt [pa]	26.0 11.0
720	NR [dB(A)] ΔPt [pa]	32.0 17.0
890	NR [dB(A)] ΔPt [pa]	37.0 24.0
1010	NR [dB(A)] ΔPt [pa]	42.0 30.0
1200	NR [dB(A)] ΔPt [pa]	45.0 40.0
1315	NR [dB(A)] ΔPt [pa]	50.0 50.0

Annotation

* X [m] - Length air jet at speed Vk = 0.2 m/s
* NR [dB(A)] - Noise level without the room attenuation
* ΔPt [pa] - Pressure loss

Order codes

Type + **ADP IZ/N** / **Dimensions** / **O**

- **CD-CK**
- Insulated/Non-insulated adapter
- **L X H** 595 x 595
- **0** Painted white RAL 9016
  R Other RAL paints