
Ceiling Diffuser CD

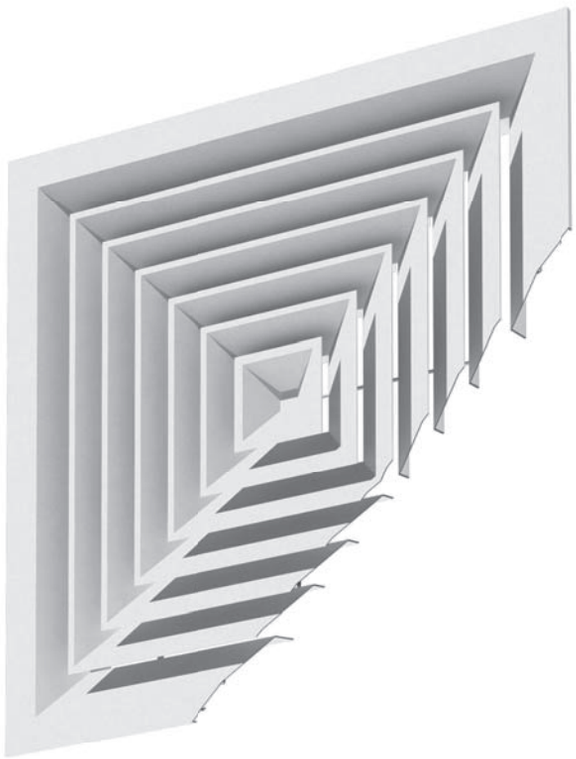

Description
4 direction aluminum ceiling diffuser, for paneled ceiling mounting.


Application
Supply or exhaust of the airflow


Characteristics
Recommended for rooms with a maximum height of 4 meters .
Removable central cone for easy installation and cleaning.
The difference between the recommended supply air temperature and the room air temperature is ± 10 K.
The air flow can be adjusted by mounting an air control damper **OBD** on the diffuser inlet.

Accessories
Air control damper with opposable blades **OBD**
Insulated/Non-insulated adapter **ADP IZ/N**

Materials and finishing
Extruded aluminum material, electrostatic field painted white RAL 9016.
Other RAL colors available on request.
Natural anodised aluminum.

Technical design
CD narrow/large frame

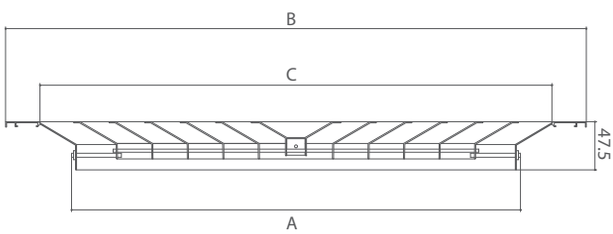

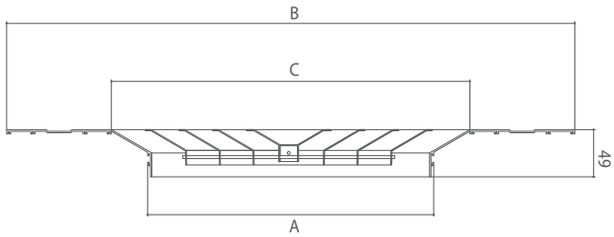

Assembly Methods
Paneled ceiling 600 x 600 mm (standard)
Mounting holes on diffuser connection (optional)

Selection table CD

Air flow (m^3/h)	LXH	150x150	225x225	300x300	375x375	455x455	525x525	600x600
	Ak [m^2]	0.0109	0.0244	0.0435	0.0679	0.0978	0.1331	0.1739
100	Veff [m/s] X (m) NR [dB(A)] ΔPt [pa]	2.6 0,6 18.0 5.0						
160	Veff [m/s] X (m) NR [dB(A)] ΔPt [pa]	4.1 1,0 29.0 12.0	1.8 0,7 13.0 2.0					
200	Veff [m/s] X (m) NR [dB(A)] ΔPt [pa]	5.1 1,2 35.0 18.0	2.3 0,8 18.0 4.0					
300	Veff [m/s] X (m) NR [dB(A)] ΔPt [pa]	7.7 1,9 45.0 41.0	3.4 1,3 28.0 8.0	1.9 0,9 16.0 3.0				
400	Veff [m/s] X (m) NR [dB(A)] ΔPt [pa]		4.6 1,7 35.0 15.0	2.6 1,3 24.0 5.0	1.6 1,0 15.0 2.0			
500	Veff [m/s] X (m) NR [dB(A)] ΔPt [pa]		5.7 2,1 41.0 23.0	3.2 1,6 29.0 7.0	2.1 1,3 20.0 3.0			
600	Veff [m/s] X (m) NR [dB(A)] ΔPt [pa]		6.8 2,5 45.0 33.0	3.8 1,9 34.0 10.0	2.5 1,5 25.0 4.0	1.7 1,3 17.0 2.0		
700	Veff [m/s] X (m) NR [dB(A)] ΔPt [pa]		8.0 2,9 49.0 44.0	4.5 2,2 37.0 14.0	2.9 1,8 28.0 6.0	2.0 1,5 21.0 3.0		
800	Veff [m/s] X (m) NR [dB(A)] ΔPt [pa]		9.1 3,3 53.0 58.0	5.1 2,5 41.0 18.0	3.3 2,0 32.0 7.0	2.3 1,7 24.0 4.0	1.7 1,4 18.0 2.0	
900	Veff [m/s] X (m) NR [dB(A)] ΔPt [pa]			5.8 2,8 44.0 23.0	3.7 2,3 35.0 9.0	2.6 1,9 27.0 5.0	1.9 1,6 21.0 2.0	
1000	Veff [m/s] X (m) NR [dB(A)] ΔPt [pa]			6.4 3,1 46.0 29.0	4.1 2,5 37.0 12.0	2.8 2,1 30.0 6.0	2.1 1,8 23.0 3.0	1.6 1,6 18.0 2.0
1200	Veff [m/s] X (m) NR [dB(A)] ΔPt [pa]			7.7 3,8 51.0 41.0	4.9 3,0 42.0 17.0	3.4 2,5 34.0 8.0	2.5 2,1 28.0 4.0	1.9 1,9 23.0 3.0
1600	Veff [m/s] X (m) NR [dB(A)] ΔPt [pa]				6.6 4,0 49.0 30.0	4.5 3,3 41.0 14.0	3.3 2,9 35.0 8.0	2.6 2,5 30.0 5.0
2000	Veff [m/s] X (m) NR [dB(A)] ΔPt [pa]				8.2 5,0 54.0 47.0	5.7 4,2 47.0 23.0	4.2 3,6 41.0 12.0	3.2 3,1 35.0 7.0
3000	Veff [m/s] X (m) NR [dB(A)] ΔPt [pa]					8.5 6,3 57.0 51.0	6.3 5,4 51.0 27.0	4.8 4,7 45.0 16.0

NR < 35 | 35≤NR≤45 | NR>45

Annotation

* Ak [m²] - Free surface of the diffuser
* Veff[m/s] - Air velocity in diffuser
* X [m] - Air jet length
* NR [dB(A)] - Noise level without the room attenuation
* ΔPt [pa] - Pressure loss inside diffuser
* Vk = 0.2 [m/s] - Speed at which airflow length was calculated "x" [m]

Standard dimensions

CD			
neck / external size	**A**	**B**	**C**
150 / 290	150 x 150	290 x 290	230 x 230
150 / 595	150 x 150	595 x 595	235 x 235
225 / 365	225 x 225	365 x 365	305 x 305
225 / 595	225 x 225	595 x 595	315 x 315
300 / 440	300 x 300	440 x 440	380 x 380
300 / 595	300 x 300	595 x 595	385 x 385
375 / 515	375 x 375	515 x 515	455 x 455
375 / 595	375 x 375	595 x 595	465 x 465
455 / 595	455 x 455	595 x 595	535 x 535
480 / 620	480 x 480	620 x 620	560 x 560
525 / 665	525 x 525	665 x 665	605 x 605
600 / 740	600 x 600	740 x 740	680 x 680

Order codes

Type + **OBD** + **ADP IZ/N** / **Dimensions** / **L X H** / **O**

- **Type**: **CD**
- **OBD**: Air control damper
- **ADP IZ/N**: Insulated/ Non-insulated adapter
- **Dimensions** — **neck / external size**: 150 / 290; 150 / 595; 225 / 365; 225 / 595; 300 / 440; 300 / 595; 375 / 515; 375 / 595; 455 / 595; 480 / 620; 525 / 665; 600 / 740
- **L X H**: Other dimensions on request
- **O**: **0** Painted white RAL 9016; **R** Other RAL paints; Natural anodised