
Perforated Grille EGG/EGGD

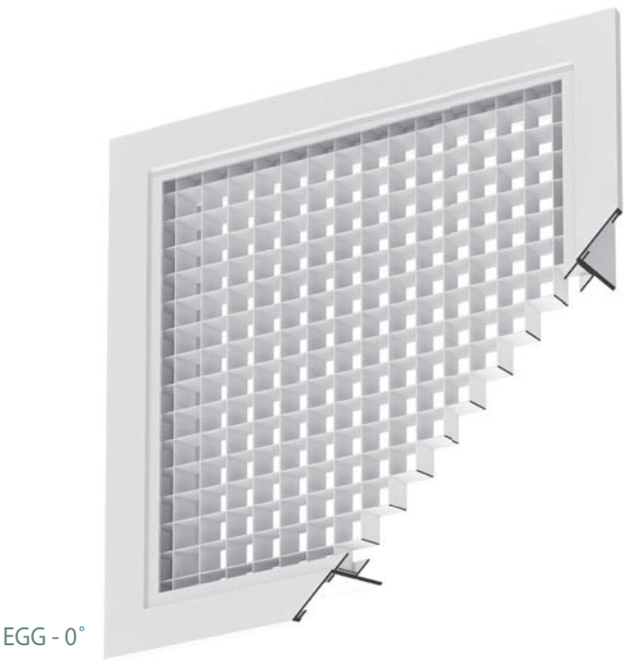

EGG - 0˚

Description

Rectangular ventilation grille with grid that allows the evacuation of high air flow rates with minimum pressure loss **EGG/EGGD**.

Application

Exhaust and recirculation of the air flow.

Characteristics

The grid measures 12.5 x 12.5mm, at 0 or 45 degrees.
Grille is provided with countersunk holes for mounting (standard) **EGG/EGGD.**
Specifically designed for integration into the ceiling box dimensions 600 x 600 mm, the 595 x 595 mm grille (external mesurement) is provided without mounting holes.
Optionally for **EGG,** a settlement frame can be used for concealed mounting and mounting holes on inlet connection for **EGGD**.
The grille is mounted into the settlement frame using a clip mechanism, allowing fast detachment/installation.
EGGD is opened via a click type system (open/close by pressing).
Optionally, an air filter **FIL** can be mounted on the inlet connection of the grille.

Accessories


Air filter **FIL**
Air control damper with opposable blades **OBD**
Settlement frame made of galvanized metal sheet **CC**
Insulated/Non-insulated adapter **ADP IZ/N**

Materials and finishing


Aluminum material, electrostatic field painted white RAL 9016.
Other RAL colors available on request.
Natural anodised aluminum.

Technical design


EGG - 0˚

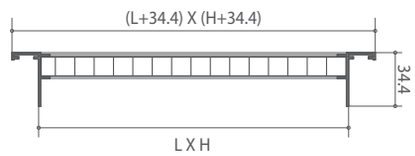

EGG - 45˚

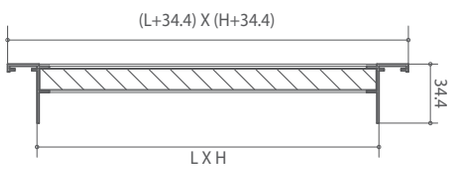

EGGD-0˚

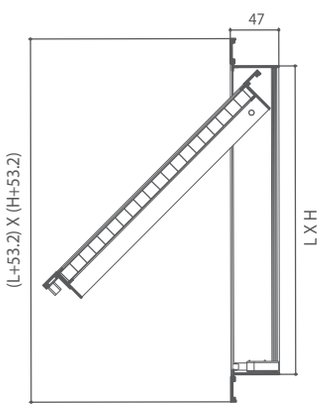

Assembly Methods

Mounting screws (standard)
Settlement frame (optional) **EGG.**
For **EGGD,** with screws on the inlet connection of the grille (optional).

Selection table EGG/EGGD

Air flow (m^3/h)	LxH Ak [m^2]	200 x 100 0.0135	300 x 150 0.0324	400 x 200 0.0675	300 x 300 0.0729	500 x 300 0.1296	600 x 300 0.1539	800 x 300 0.206	600 x 600 0.3249	1000 x 600 0.55575
100	Veff NR [dB(A)] ΔPt [pa]	2.1 < 20 7.0								
200	Veff NR [dB(A)] ΔPt [pa]	4.1 29.0 27.0	1.7 < 20 5.0							
300	Veff NR [dB(A)] ΔPt [pa]	6.2 40.0 61.0	2.6 21.0 11.0	1.2 < 20 2.0	1.1 < 20 2.0					
400	Veff NR [dB(A)] ΔPt [pa]	8.2 48.0 108.0	3.4 29.0 19.0	1.6 < 20 4.0	1.5 < 20 4.0					
500	Veff NR [dB(A)] ΔPt [pa]		4.3 35.0 29.0	2.1 20.0 7.0	1.9 < 20 6.0	1.1 < 20 2.0				
600	Veff NR [dB(A)] ΔPt [pa]		5.1 40.0 42.0	2.5 25.0 10.0	2.3 23.0 8.0	1.3 < 20 3.0	1.1 < 20 2.0			
700	Veff NR [dB(A)] ΔPt [pa]		6.0 44.0 58.0	2.9 29.0 13.0	2.7 27.0 11.0	1.5 < 20 4.0	1.3 < 20 3.0			
800	Veff NR [dB(A)] ΔPt [pa]		6.9 48.0 75.0	3.3 33.0 17.0	3.0 31.0 15.0	1.7 < 20 5.0	1.4 < 20 3.0	1.1 < 20 2.0		
900	Veff NR [dB(A)] ΔPt [pa]		7.7 51.0 95.0	3.7 36.0 22.0	3.4 34.0 19.0	1.9 22.0 6.0	1.6 < 20 4.0	1.2 < 20 2.0		
1000	Veff NR [dB(A)] ΔPt [pa]			4.1 39.0 27.0	3.8 37.0 23.0	2.1 25.0 7.0	1.8 21.0 5.0	1.3 < 20 3.0		
1500	Veff NR [dB(A)] ΔPt [pa]			6.2 50.0 61.0	5.7 48.0 52.0	3.2 36.0 17.0	2.7 32.0 12.0	2.0 26.0 7.0	1.3 < 20 3.0	
2000	Veff NR [dB(A)] ΔPt [pa]				7.6 56.0 93.0	4.3 44.0 29.0	3.6 40.0 21.0	2.7 34.0 12.0	1.7 24.0 5.0	1.0 < 20 2.0
3000	Veff NR [dB(A)] ΔPt [pa]					6.4 55.0 66.0	5.4 51.0 47.0	4.0 45.0 26.0	2.6 35.0 11.0	1.5 24.0 4.0
4000	Veff NR [dB(A)] ΔPt [pa]						7.2 59.0 83.0	5.4 53.0 47.0	3.4 43.0 19.0	2.0 32.0 6.0
5000	Veff NR [dB(A)] ΔPt [pa]							6.7 59.0 73.0	4.3 49.0 29.0	2.5 38.0 10.0
6000	Veff NR [dB(A)] ΔPt [pa]								5.1 54.0 42.0	3.0 43.0 14.0
7000	Veff NR [dB(A)] ΔPt [pa]								6.0 59.0 57.0	3.5 47.0 20.0
8000	Veff NR [dB(A)] ΔPt [pa]									4.0 51.0 26.0
9000	Veff NR [dB(A)] ΔPt [pa]									4.5 54.0 32.0
10000	Veff NR [dB(A)] ΔPt [pa]									5.0 57.0 40.0

Annotation

- Ak [m²] - Free surface of the grille
- Veff [m/s] - Air velocity inside the grille
- NR [dB(A)] - Noise level without the room attenuation
- ΔPt [pa] - Pressure loss

NR < 35 | 35≤NR≤45 | NR>45

Order codes

Type - 0/45° + **FIL** + **OBD** + **CC** + **ADP IZ/N** / **Dimensions** / **L X H** / **O**

- **EGG/EGGD**
- Air filter
- Air control damper
- Settlement frame
- Insulated/ non-insulated adapter
- **Dimensions**
  - **L X H**: 200 x 100, 300 x 150, 400 x 200, 300 x 300, 500 x 300
  - **L X H**: 600 x 300, 800 x 300, 600 x 600, 1000 x 600
- Other dimensions on request
- **O**
  - **0** Painted white RAL 9016
  - **R** Other RAL paints
  - Natural anodised