EILAT Grille



Description
Rectangular ventilation grille with two rows of adjustable blades and operating lever.


Application
Supply/ exhaust of the air flow

Characteristics
The front row blades are mounted perpendicular to the length "L" and are individually adjustable.
Additional blades are mounted perpendicular to the "H" (high) and allow adjustment of air flow through the operating lever.
The action lever operates on a maximum length of 500 mm. For larger dimensions, additional operating lever will be mounted.
The grille is provided with mounting holes (standard).

Accessories
Insulated/Non-insulated adapter **ADP IZ/N**.

Materials and finishing
Extruded aluminum material, electrostatic field painted white RAL 9016.
Other RAL colors available on request.

Technical design

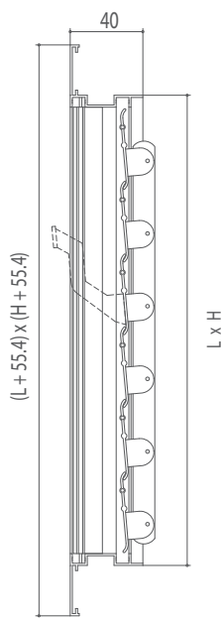

Assembly Methods
Standard mounting, with screws.

Selection table EILAT

Air flow (m^3/h)	LxH	200 x 100	300 x100	300 x 150	400 x 100	500 x 100	300 x 200	400 x 150	600 x 100	400 x 200	500 x 150	800x100	500x200	600 x 150	600 x200	800 x 150	500 x 300	800 x 200	600 x 300	800 x 300	1000 x 300
	Ak(m^2)	0.011	0.016	0.024	0.024	0.03	0.04	0.04	0.04	0.049	0.049	0.049	0.06	0.06	0.078	0.078	0.105	0.105	0.132	0.16	0.21
150	Veff[m/s] ΔPt [pa] X [m] NR [dB(A)]	3.8 10.0 4.1 -	2.6 5.0 3.4 -																		
200	Veffm/s] ΔPt [pa] X [m] NR [dB(A)]	5.0 18.0 5.5 19.0	3.5 8.0 4.5 -	2.3 4.0 3.7 -	2.3 4.0 3.7 -																
300	Veff[m/s] ΔPt [pa] X [m] NR [dB(A)]	7.6 40.0 8.2 28.0	5.2 19.0 6.8 21.0	3.5 8.0 5.6 -	3.5 8.0 5.6 -	2.8 5.0 5.0 -	2.1 3.0 4.3 -	2.1 3.0 4.3 -	2.1 3.0 4.3 -												
400	Veff[m/s] ΔPt [pa] X [m] NR [dB(A)]		6.9 3.4 9.1 28.0	4.6 15.0 7.4 20.0	4.6 15.0 7.4 20.0	3.7 10.0 6.0 16.0	2.8 5.0 5.7 -	2.8 5.0 5.7 -	2.8 5.0 5.7 -	2.3 4.0 5.2 -	2.3 4.0 5.2 -	2.3 4.0 5.2 -									
500	Veff[m/s] ΔPt [pa] X [m] NR [dB(A)]			5.8 23.0 9.3 25.0	5.8 23.0 9.3 25.0	4.6 15.0 8.3 21.0	3.5 8.0 7.2 -	3.5 8.0 7.2 -	3.5 8.0 7.2 -	2.8 6.0 6.5 -	2.8 6.0 6.5 -	2.8 6.0 6.5 -	2.3 4.0 5.9 -	2.3 4.0 5.9 -							
700	Veff[m/s] ΔPt [pa] X [m] NR [dB(A)]					6.5 29.0 12.0 29.0	4.9 17.0 10.0 23.0	4.9 17.0 10.0 23.0	4.9 17.0 10.0 23.0	4.0 11.0 9.1 19.0	4.0 11.0 9.1 19.0	4.0 11.0 9.1 19.0	3.2 7.0 8.2 15.0	3.2 7.0 8.2 15.0	2.5 4.0 7.2 -	2.5 4.0 7.2 -					
900	Veff[m/s] ΔPt [pa] X [m] NR [dB(A)]						6.2 27.0 13.0 29.0	6.2 27.0 13.0 29.0	6.2 27.0 13.0 29.0	5.1 18.0 12.0 25.0	5.1 18.0 12.0 25.0	5.1 18.0 12.0 25.0	4.2 12.0 11.0 21.0	4.2 12.0 11.0 21.0	3.2 7.0 9.2 16.0	3.2 7.0 9.2 16.0	2.4 4.0 8.0 -	2.4 4.0 8.0 -			
1200	Veff[m/s] ΔPt [pa] X [m] NR [dB(A)]									6.8 32.0 16.0 32.0	6.8 32.0 16.0 32.0	6.8 32.0 16.0 32.0	5.5 22.0 14.0 22.0	5.5 22.0 14.0 22.0	4.3 13.0 12.0 23.0	4.3 13.0 12.0 23.0	3.2 7.0 11.0 17.0	3.2 7.0 11.0 17.0	2.5 4.0 9.5 -	2.1 3.0 8.6 -	
1500	Veff[m/s] ΔPt [pa] X [m] NR [dB(A)]												6.9 34.0 18.0 34.0	6.9 34.0 18.0 34.0	5.3 20.0 15.0 29.0	5.3 20.0 15.0 29.0	4.0 11.0 13.0 23.0	4.0 11.0 13.0 23.0	3.2 7.0 12.0 18.0	2.6 5.0 11.0 -	2.0 3.0 9.4 -

NR < 25 | 25≤NR≤35

Annotation

* Ak [m^2] - Free surface of the grille
* Veff[m/s] - Air velocity in grille
* ΔPt [pa] - Pressure loss
* X [m] - Air jet length
* NR [dB(A)] - Noise level without room attenuation
* Vk [m/s] - Speed at which airflow length was calculated
  "x" [m] - Vk [m/s] = 0.375 m/s

Order codes

Type + **ADP IZ/N** / **Dimensions** / **L X H** / **O**

- **Type**: **EILAT**
- **ADP IZ/N**: Insulated/Non-insulated adapter
- **Dimensions**: **L X H** | **L X H**
  200 x 100 | 500 x 300
  300 x 100 | 600 x 100
  300 x 150 | 600 x 150
  300 x 200 | 600 x 200
  400 x 100 | 600 x 300
  400 x 150 | 800 x 100
  400 x 200 | 800 x 150
  500 x 100 | 800 x 200
  500 x 150 | 800 x 300
  500 x 200 | 1000 x300
- **L X H**: Other dimensions on request
- **O**: **0** Painted white RAL 9016; **R** Other RAL paints