Circular Valve EV



Description
Circular steel valve with adjustable central cone for exhaust of the air, provided with mounting frame **EV**.


Application
Exhaust the airflow

Characteristics
Valve is provided with gasket seal and mounting frame
The adjustable center cone allows adjustment of air flow
The mounting frame is provided with holes for fixing

Materials and finishing
Steel electrostatic field painted in RAL9016 white
Other RAL colors available on request.
Mounting frame made of galvanized metal sheet

Assembly Methods
Screws on the mounting frame.

Technical design

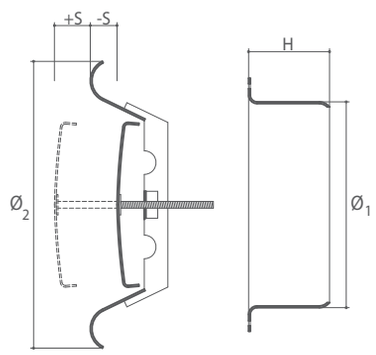

Tip	Ø1	Ø2	H
EV	100	140	45
	125	165	47
	150	200	47
	160	210	50
	200	250	50

Selection table EV

Air flow	Dimension (mm)	100					125							160						200							
(m^3/h)	S(mm)	-14	-9	-5	0	5	-15	-12	-9	-6	-3	0	5	-18	-15	-10	-5	0	6	-23	-20	-15	-10	-5	0	10	20
20	NR [dB(A)]	24.0	<25				<25	<25																			
	△ Pt [pa]	200.0	25.0				23.0	12.0																			
30	NR [dB(A)]		<25	<25			<25	<25	<25																		
	△ Pt [pa]		60.0	20.0			50.0	25.0	15.0																		
50	NR [dB(A)]		40.0	<25	<25	<25	30.0	<25	<25	<25	<25	<25		<30	<25	<30				<30	<25	<30					
	△ Pt [pa]		150.0	60.0	25.0	12.0	145.0	70.0	40.0	25.0	12.0	10.0		70.0	30.0	12.0				50.0	28.0	12.0					
70	NR [dB(A)]		>40	35.0	<30	<30	40.0	30.0	<25	<25	<25	<25	<25	35.0	<30	<30	<30			30.0	<30	<30	<30				
	△ Pt [pa]		300.0	110.0	50.0	28.0	260.0	110.0	70.0	50.0	30.0	23.0	12.0	125.0	70.0	28.0	15.0			100.0	52.0	22.0	12.0				
100	NR [dB(A)]			>40	37.0	30.0		42.0	37.0	30.0	<35	<30	<25	>40	35.0	<30	<30	<30		37.0	33.0	<30	<30	<30			
	△ Pt [pa]			300.0	100.0	55.0		220.0	150.0	90.0	65.0	40.0	28.0	280.0	125.0	52.0	30.0	18.0		175.0	110.0	40.0	25.0	15.0			
200	NR [dB(A)]					>40					50.0	45.0	40.0			>40	38.0	33.0	28.0			40.0	35.0	30.0	<30	<30	<30
	△ Pt [pa]					200.0					250.0	170.0	110.0			270.0	140.0	70.0	40.0			150.0	90.0	55.0	20.0	20.0	10.0
250	NR [dB(A)]																>40	40.0	34.0			>40	40.0	36.0	31.0	<30	<30
	△ Pt [pa]																200.0	120.0	70.0			250.0	140.0	80.0	52.0	30.0	15.0
300	NR [dB(A)]																>40	>40	40.0				>40	41.0	36.0	40.0	<30
	△ Pt [pa]																300.0	200.0	110.0				200.0	130.0	75.0	45.0	25.0
500	NR [dB(A)]																								>40	42.0	37.0
	△ Pt [pa]																								200.0	110.0	55.0
700	NR [dB(A)]																									>40	>40
	△ Pt [pa]																									210.0	110.0

Annotation

* S [mm] - Disk opening
* ΔPt [pa] - Pressure loss
* NR [dB(A)] - Noise level without the room attenuation

Order codes

Type	/	Diameter	/	O
EV		100 125 150 160 200		**0** Painted white RAL 9016 **R** Other RAL paints