Jet Diffuser JD



Description
Diffuser with long range air supply capacity.
Ideal for use in traffic areas, theaters, discos, museums, concert halls, etc.


Application
Air supply

Characteristics
Low noise level.
Spherical nozzle bordered by a ring with mounting holes, allows airflow direction in the desired area.
Decorative ring for masked mounting.
Circular inlet connection for mounting to air ducts.

Accessories
Insulated/ Non-insulated adapter **ADP IZ/N**.

Materials and finishing
Aluminum nozzle and decorative ring, electrostatic field painted white RAL 9016.
Other RAL colors available on request.
Polypropylene ring (mounting)
Galvanized steel sheet connection (for air ducts)

Technical design

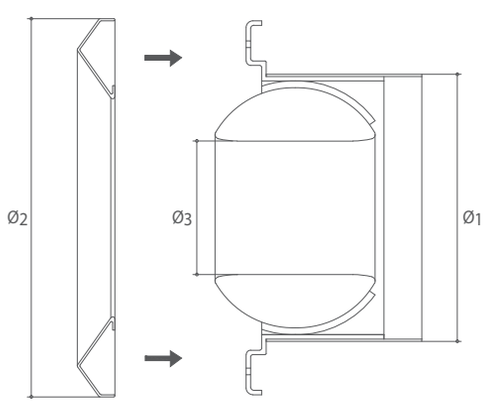

Ø1	Ø2	Ø3
125	170	60
160	210	80
200	255	105
250	300	135
315	380	185
400	470	230
500	595	285

Assembly Methods
Standard mounting, with screws.

Selection table JD

Air flow (m³/h)	Ø	125	160	200	250	315	400
	Ak(m²)	0.0031	0.005	0.0085	0.0135	0.0225	0.0385
100	Veff [m/s] NR [dB(A)] ΔPt [pa] X [m]	8.96 20 48 5	5.56 <20 20 4				
150	Veff [m/s] NR [dB(A)] ΔPt [pa] X [m]	13.44 32 100 7	8.33 20 40 5.50	4.90 <20 8.00 4.30			
200	Veff [m/s] NR [dB(A)] ΔPt [pa] X [m]	17.92 40 180 8.5	11.11 28 60 7	6.54 <20 25 5.5			
300	Veff [m/s] NR [dB(A)] ΔPt [pa] X [m]		16.67 40 150 8.5	9.80 28 60 6.3	6.17 <20 22 5.2		
500	Veff [m/s] NR [dB(A)] ΔPt [pa] X [m]			16.34 45 140 9	10.29 37 60 8	6.17 20 25 6	
700	Veff [m/s] NR [dB(A)] ΔPt [pa] X [m]				14.40 40 100 10	8.64 28 48 8	5.05 <20 12 6.5
1000	Veff [m/s] NR [dB(A)] ΔPt [pa] X [m]				20.58 52 230 13	12.35 40 95 12	7.22 25 28 10
1500	Veff [m/s] NR [dB(A)] ΔPt [pa] X [m]					18.52 52 200 18	10.82 35 62 14
2000	Veff [m/s] NR [dB(A)] ΔPt [pa] X [m]					24.7 >50 320 20	14.4 45 120 18

Annotation

* Ak [m²] - Free surface of the diffuser
* Veff[m/s] - Air velocity in diffuser
* X [m] - Air jet length
* ΔPt [pa] - Pressure loss
* NR [dB(A)] - Noise level without the room attenuation

Note: The values are for ΔT = + 10 K.

Order codes

Type + **ADP IZ/N** / **Dimensions** / **O**

- **Type**: **JD**
- **ADP IZ/N**: Insulated/Non-insulated adapter
- **Dimensions**: 125, 160, 200, 250, 315, 400, 500
- **O**: **0** Painted white RAL 9016; **R** Other RAL paints