
Floor Linear Diffuser LBDF

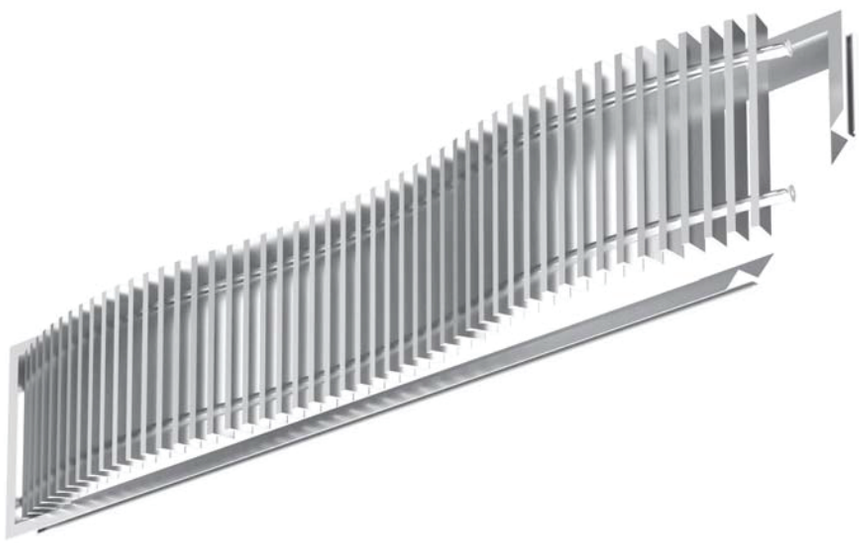

Description
Rectangular aluminum grille for floor mounting


Application
Various air supply/ exhaust systems (eg. floor convector).

Characteristics
15 degree shaped blades perpendicular to the length "L" of the grille
The grille consists of an outdoor frame and a removable inner rolling core.
Removable core allows easy installation and easy cleaning.

Accessories
Insulated/Non-insulated adapter **ADP IZ/N**.

Materials and finishing
Extruded aluminum with natural anodised finishing

Technical design

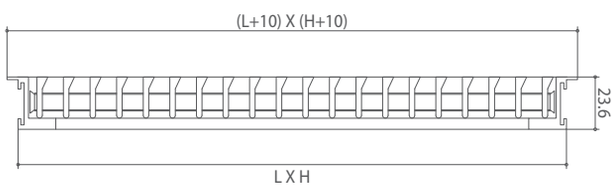

Selection table LBDF

Supply		Veff [m/s]	2
		ΔPt [pa]	4
		NR [dB(A)]	21
Length (mm)	Height (mm)	Air flow (m^3/h)	Ak (mp)
450	100	100	0.014
550		125	0.017
650		150	0.021
800		180	0.025
1050		250	0.035
1300		300	0.042
450	150	180	0.025
550		230	0.032
650		270	0.038
800		350	0.049
1050		450	0.063
1300		570	0.079
450	200	270	0.038
550		330	0.046
650		400	0.056
800		500	0.069
1050		670	0.093
1300		840	0.117

Exhaust		Veff [m/s]	3
		ΔPt [pa]	7.5
		NR [dB(A)]	24
Length (mm)	Height (mm)	Air flow (m^3/h)	Ak (mp)
450	100	150	0.014
550		180	0.017
650		220	0.021
800		270	0.025
1050		370	0.035
1300		460	0.042
450	150	270	0.025
550		350	0.032
650		410	0.038
800		510	0.049
1050		690	0.063
1300		860	0.079
450	200	400	0.038
550		500	0.046
650		600	0.056
800		750	0.069
1050		1010	0.093
1300		1250	0.117

Annotation

* Veff[m/s] - Air velocity in grille
* Δ Pt [pa] - Pressure loss
* NR [dB(A)] - Noise level without the room attenuation
* Ak [m^2] - Free surface of the grille

Order codes

Type	+	ADP IZ/N	/	Dimensions
LBDF		Insulated/Non-insulated adapter		On request