
Linear Ceiling Diffuser LCD

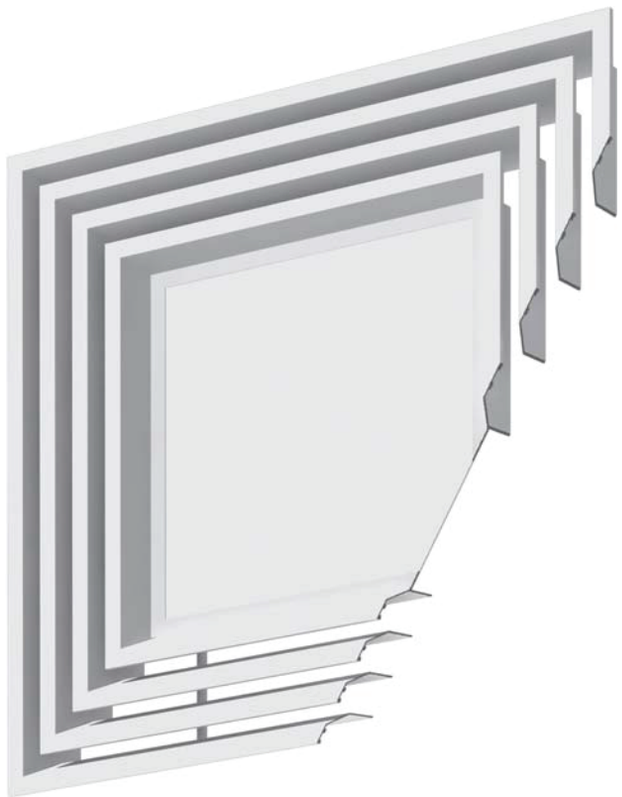

Description
Rectangular diffuser, paneled ceiling type, with four direction air jet diffuser.


Application
Designed for various air supply or exhaust systems.

Characteristics
Preferred for paneled ceiling, 600 x 600 mm diffuser with 1, 2 or 3 peripheral slots.
The air flow can be adjusted by mounting an air control damper OBD on the diffuser inlet.

Accessories
Air control damper with opposable blades **OBD**
Insulated/non-insulated adapter **ADP IZ/N**

Materials and finishing
Extruded aluminum blades, electrostatic field painted white RAL 9016.
Other RAL colors available on request.

Technical design

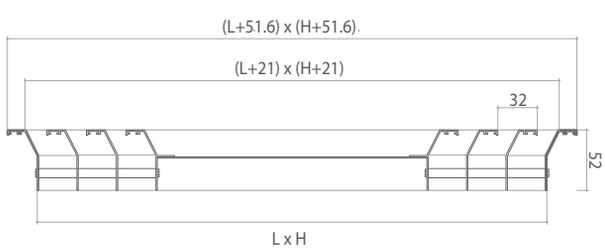

Assembly Methods
Paneled ceiling 600 x 600 mm (standard)

Selection table LCD

Air flow (m^3/h)	595X595			
	No. slots	1	2	3
	Ak [m^2]	0.028	0.048	0.068
150	Veff(m/s) X [m] NR [dB(A)] ΔPt [pa]	1.5 0.8 <20 2.1		
200	Veff(m/s) X [m] NR [dB(A)] ΔPt [pa]	2.0 1.0 20.0 3.3	1.2 0.7 <20 1.1	
300	Veff(m/s) X [m] NR [dB(A)] ΔPt [pa]	3.0 1.4 28.0 7.3	1.7 1.1 22.0 2.5	1.2 0.9 <20 1.2
400	Veff(m/s) X [m] NR [dB(A)] ΔPt [pa]	4.0 1.9 34.0 13.0	2.3 1.5 29.0 4.4	1.6 1.2 25.0 2.2
500	Veff(m/s) X [m] NR [dB(A)] ΔPt [pa]	5.0 2.4 39.0 20.4	2.9 1.8 33.0 6.9	2.0 1.5 30 3.4
600	Veff(m/s) X [m] NR [dB(A)] ΔPt [pa]	6.0 2.9 43.0 29.3	3.5 2.2 37.0 9.9	2.5 1.9 33.0 4.9
700	Veff(m/s) X [m] NR [dB(A)] ΔPt [pa]	6.9 3.4 46.0 39.9	4.1 2.6 40.0 13.5	2.9 2.2 37.0 6.7
1000	Veff(m/s) X [m] NR [dB(A)] ΔPt [pa]	9.9 4.8 54.0 81.5	5.8 3.7 48.0 27.6	4.1 3.1 44.0 13.7
1500	Veff(m/s) X [m] NR [dB(A)] ΔPt [pa]		8.7 5.5 56.0 62.1	6.1 4.6 53.0 30.9

NR < 35 | 35≤NR≤45 | NR>45

Annotation

* Ak [m^2] - Free surface of the diffuser
* Veff[m/s] - Air velocity in diffuser
* X [m] - Length airflow at speed Vk [m/s] = 0.2 m/s
* NR [dB(A)] - Noise level without the room attenuation
* ΔPt [pa] - Pressure loss inside diffuser

Note: The values in the selection table are calculated for 2.8 m high ceiling.

Order codes

Type - Number of slots + **ADP IZ/N** / **Dimensions** / **L X H** / **O**

- **LCD**
- 1 / 2 / 3
- Insulated/Non-insulated adapter
- **L X H** (595 x 595)
- Other dimensions on request
- **0** Painted white RAL 9016
- **R** Other RAL paints