
Architectural Diffuser PA

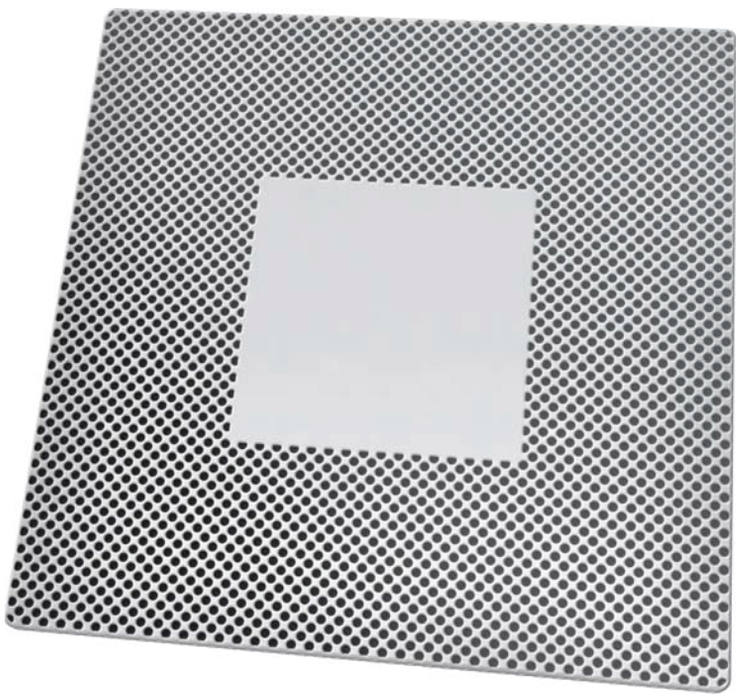

Description
Architectural diffuser with circular perforations, for paneled ceiling mounting.


Application
Supply/ exhaust ot the air flow.

Characteristics
Diffuser is provided with circular perforation of Ø 5 mm placed on the front side.
Specially designed for paneled ceiling mounting - size 600 x 600 mm.
Connects to the air ducts through the adapter.

Accessories
Insulated/Non-insulated adapter **ADP IZ/N.**

Materials and finishing
Pickled steel sheet electrostatic field painted white RAL 9016.
Other RAL colors available on request.

Technical design

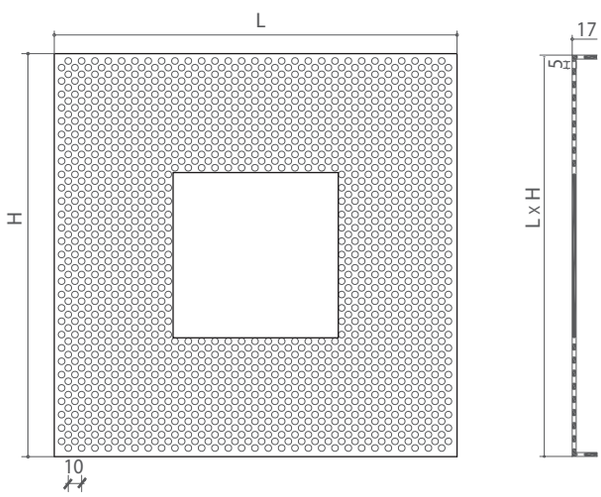

Assembly Methods
Paneled ceiling 600 x 600 mm

Selection table PA

Air flow (m^3/h)	L x H	595x595
450	X [m] NR [dB(A)] ΔPt [pa]	2.3 <10 100
500	X [m] NR [dB(A)] ΔPt [pa]	2.6 10.0 125.0
600	X [m] NR [dB(A)] ΔPt [pa]	3.1 15.0 150.0
700	X [m] NR [dB(A)] ΔPt [pa]	3.6 18.0 180.0
780	X [m] NR [dB(A)] ΔPt [pa]	4.0 20.0 200.0
890	X [m] NR [dB(A)] ΔPt [pa]	4.6 25.0 250.0
1100	X [m] NR [dB(A)] ΔPt [pa]	5.5 30.0 300.0
1300	X [m] NR [dB(A)] ΔPt [pa]	6.8 35.0 380.0
1450	X [m] NR [dB(A)] ΔPt [pa]	7.5 40.0 450.0

Annotation

* X [m] - Air jet length at 0.2 m/s velocity
* NR [dB(A)] - Noise level without the room attenuation
* ΔPt [pa] - Pressure loss

Order codes

Type + **ADP IZ/N** / **Dimensions** / **O**

- **Type**: **PA**
- **ADP IZ/N**: Insulated/Non-insulated adapter
- **Dimensions**: L X H, 595 x 595
- **O**: **0** Painted white RAL 9016; **R** Other RAL paints