Perforated Cylinder Diffuser PC




Description
Perforated cylinder for use in industrial areas.

Application
Air supply

Characteristics
Available diameters: D250, D355, D450 and D560 mm.
Length of the cylinder: 825 mm.
Height for mounting is over 3.5 m.
Suitable for use for both heating and cooling.
Horizontal and vertical dispersion of air.
Can function as an air damper, which makes the air supply possible on both horizontal and vertical levels, depending on requirements (heating/ cooling).
The diffuser is provided with a internal adjustable disk manipulated by a chain drive.

Materials and finishing
Perforated cylinder made of galvanized steel sheet
RAL colors available on request.

Technical design

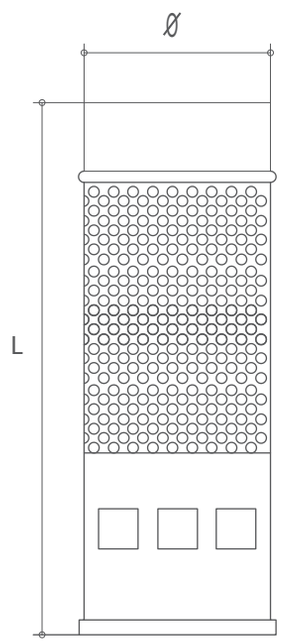

Selection table PC

Air flow (m^3/h)	Ø	250	355	450	560
700	NR [dB(A)]	31.0			
	X(m)	2.2			
	ΔPt [pa]	12.0			
1000	NR [dB(A)]	42.0	26.0		
	X(m)	3.5	2.6		
	ΔPt [pa]	23.0	7.0		
1500	NR [dB(A)]	55.0	38.0	21.0	
	X(m)	5.2	3.5	2.8	
	ΔPt [pa]	50.0	18.0	7.0	
2000	NR [dB(A)]		47.0	31.0	<25
	X(m)		4.6	3.3	2.5
	ΔPt [pa]		31.0	13.0	6.0
3000	NR [dB(A)]		>55	43.0	30.0
	X(m)		7.0	5.2	4.2
	ΔPt [pa]		70.0	28.0	13.0
4000	NR [dB(A)]			53.0	40.0
	X(m)			7.0	5.2
	ΔPt [pa]			50.0	27.0
6000	NR [dB(A)]				53.0
	X(m)				8.0
	ΔPt [pa]				60.0

Annotation

* NR [dB(A)] - Noise level
* ΔPt [pa] - Pressure loss
* X [m] - Air jet length

Note: The values in the selection table are calculated for an air jet discharge set in heating mode and for temperature deviation of ΔT= + 10 K.

Order codes

Type / **Ø** / **0**

PC

250
355
450
560

Natural steel material
0 Painted white RAL 9016
R Other RAL paints