
Perforated Ceiling Diffuser PFD/PF

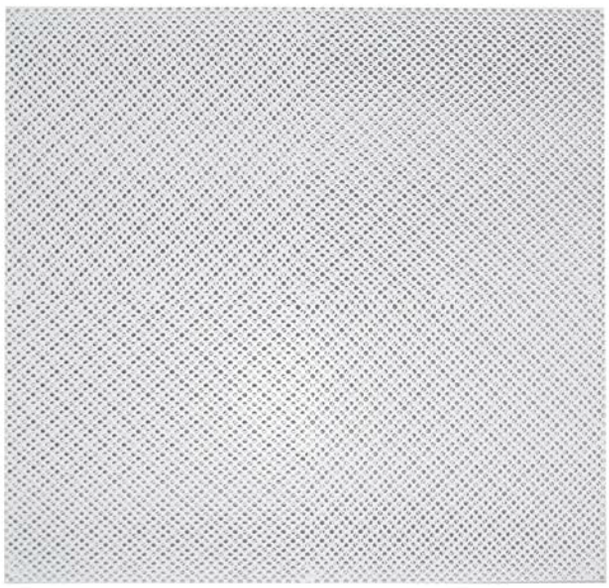

PFD

Description
Rectangular ceiling diffuser with circular perforations for exhaust/ supply of the air flow **PFD/PF.**

Application
For air supply - **PFD**, for air exhaust **PF.**


Characteristics
PFD/PF is projected for paneled ceiling mounting (600 x 600 mm).
Circular perforations of 5 mm diameter.
The PFD diffuser is provided with an air jet orientation system in 1, 2, 3 or 4 directions, without air flow deviations or pressure loss.
The diffuser connects to the ventilation duct through the adapter.

Accessories
Insulated/Non-insulated adapter **ADP IZ/N**.


Materials and finishing
Galvanized steel sheet painted in electrostatic field (white RAL 9016).
Other RAL colors available on request.

Technical design

PFD/PF

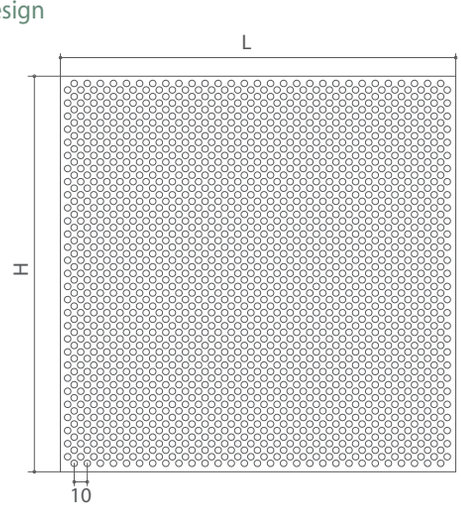

PFD



PF



Assembly Method
Paneled ceiling mounting 600 x 600 mm.

Selection table PFD/ PF

PFD - supply

Air flow (m^3/h)	LxH	595x595
	Ak [m^2]	0.150
700	Veff(m/s)	1.3
	X [m]	1.8
	NR [dB(A)]	27.0
	ΔPt [pa]	7.0
1000	Veff(m/s)	1.9
	X [m]	2.6
	NR [dB(A)]	39.0
	ΔPt [pa]	15.0
1600	Veff(m/s)	3.0
	X [m]	3.1
	NR [dB(A)]	54.0
	ΔPt [pa]	36.0

PF - exhaust

Air flow (m^3/h)	LxH	595x595
	Ak [m^2]	0.150
700	Veff(m/s)	
	NR [dB(A)]	
	ΔPt [pa]	
1000	Veff(m/s)	1.9
	NR [dB(A)]	20.0
	ΔPt [pa]	33.0
1600	Veff(m/s)	3.0
	NR [dB(A)]	36.0
	ΔPt [pa]	85.0

Note: The values for the supply mode from selection table are calculated for a 4 direction system diffuser and for an air velocity of Vk = 0.2 m/s.

Annotation

* Ak [m²] - Free surface
* Veff[m/s] - Air velocity inside the diffuser
* X [m] - Air jet length
* NR [dB(A)] - Noise level without the room attenuation
* ΔPt [pa] - Pressure loss

Order codes

Type	+	**ADP IZ/N**	/	**Dimensions**	/	**L x H**	/	**0**
PFD/PF		Insulated/ Non-insulated adapter		L X H 595 x 595		Other dimensions on request		**0** Painted white RAL 9016 **R** Other RAL paints