Round Fire Damper RFD

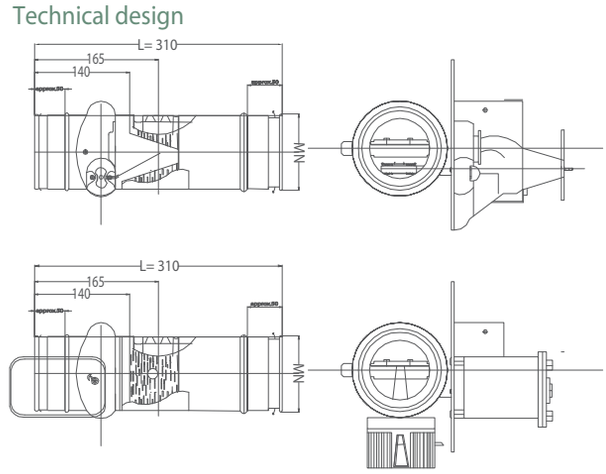


Description
Round fireproof damper designed for automatic isolation of ventilation and air conditioning systems compartments. Suitable for mounting into concrete walls and ceilings.

Application
For closing and sealing the ventilation ducts in case of fire.

Characteristics
Drive system with fusible element.
Automatic closing fire damper fusible element is determined to be active at temperatures> 72 ° C.
Various classes of fire resistance (RF60, RF90, RF120).
Optional contact signal for start/ end of the cycle.
Alternatively, an electric actuator can be used.

Materials and finishing
Galvanized sheet steel case
Special insulated damper blade

Technical design


Selection table RFD

Veff (m/s)	Diameter (mm)	100	125	160	200
4	NR [dB(A)] ΔPt [pa]	34.00 18.20	28.00 10.60	25.00 8.60	20.00 5.80
6	NR [dB(A)] ΔPt [pa]	41.00 41.00	38.00 23.80	34.00 19.40	30.00 13.00
8	NR [dB(A)] ΔPt [pa]	48.00 73.00	45.00 42.20	42.00 34.60	38.00 23.00
10	NR [dB(A)] ΔPt [pa]	53.00 114.00	51.00 66.00	47.00 34.60	45.00 36.00
12	NR [dB(A)] ΔPt [pa]	57.00 164.20	55.00 95.00	52.00 77.80	50.00 51.80
15	NR [dB(A)] ΔPt [pa]	63.00 256.50	60.00 148.50	58.00 121.50	55.00 81.00

Annotation

* Veff[m/s] - Air velocity in damper
* ΔPt [pa] - Pressure loss
* NR [dB(A)] - Noise level without the room attenuation

Order codes

Type / **Dimensions**

RFD

100
125
160
200