
Combined Grille SD-DD

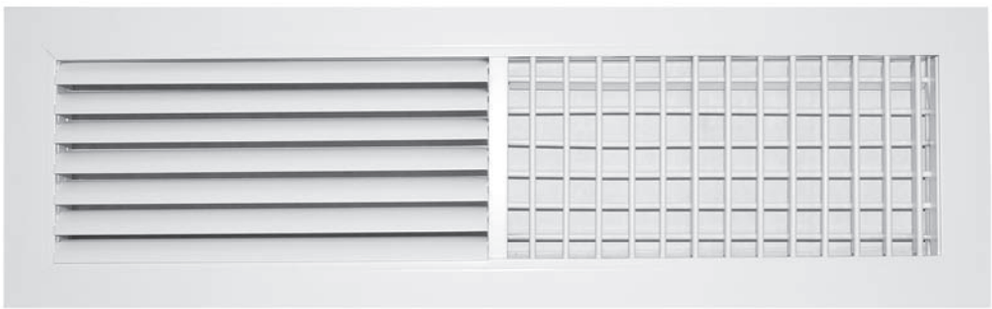


Description
Aluminum rectangular grill that consists in simple deflection grille **SD** combined with a double deflection grille **DD**

Application
Supply/ exhaust of the airflow

Characteristics
The DD grille blades are individually adjustable and allow airflow direction and the SD grille blades are fixed.
Grille is provided with countersunk holes for mounting.
A settlement frame CC is recommended for concealed installation
The settlement frame can only be used if the SD blades are perpendicular to the length scale L
The air flow can be adjusted by mounting an air control damper OBD on the grille inlet connection.

Accessories
Air control damper with opposable blades **OBD**
Settlement frame made of galvanized metal sheet **CC**
Insulated/Non-insulated adapter **ADP IZ/N**

Materials and finishing
Extruded aluminum material, electrostatic field painted white RAL 9016.
Other RAL colors available on request.

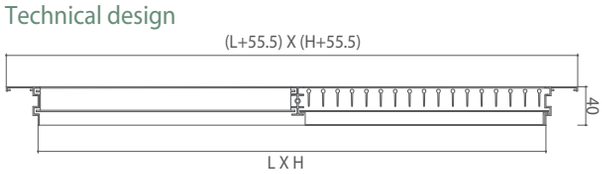Technical design


Assembly Methods
Screws for mounting (standard)
Settlement frame for mounting (optional)

Order codes

Type	+	OBD	+	CC	+	ADP IZ/N	/	L X H	/	O
SD-DD		Air control damper		Settlement frame		Indulated/Non-insulated adapter		On request		**0** Painted white RAL 9016 **R** Other RAL paints