
Aspiration Grille SD

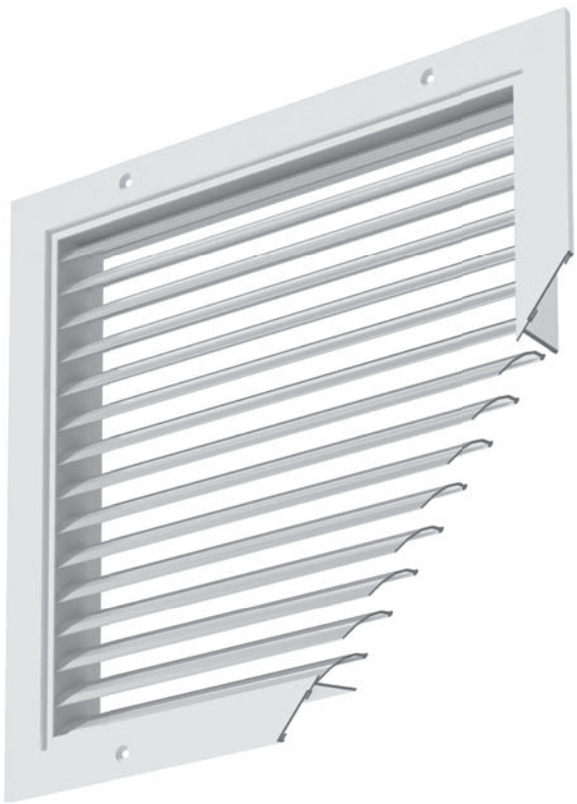

Description
Aluminum grille for air exhaust/ recirculation with fixed blades at 45 degrees **SD**.


Application
Exhaust/recirculation of the air.

Characteristics
The grille is provided with fixed blades and countersinking holes for mounting, except size 595 x 595 mm (paneled ceiling).
Optionally, can be used a settlement frame for concealed mounting.
The air flow can be adjusted by mounting an air control damper **OBD** on the diffuser inlet.

Accessories
Air filter **FIL**
Air control damper with opposable blades **OBD**.
Settlement frame **CC** made of galvanized steel sheet.
Insulated/Non-insulated adapter **ADP IZ/N**.

Materials and finishing
Extruded aluminum electrostatic field painted white RAL 9016.
Other RAL colors available on request.
Natural anodised aluminum.

Technical design

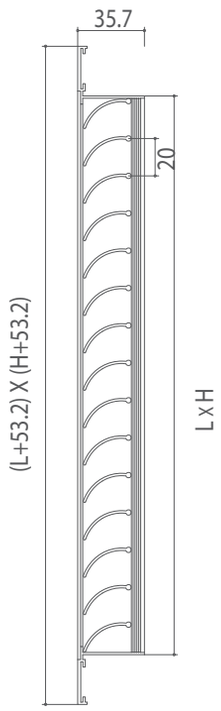

Assembly Method
With screws (standard).
Settlement frame for mounting (optional).

Aspiration Grille SDD



Description
Aluminum grille for air exhaust/ recirculation with fixed blades at 45 degrees **SDD**.


Application
Exhaust/recirculation of the air

Characteristics
The grille is provided with fixed blades and countersinking holes for mounting, except size 595 x 595 mm (paneled ceiling).
Optionally can be used a settlement frame for concealed mounting or mounting holes on inlet connection.
SDD is provided with access door and air filter.
The opening method of **SDD** consists of a click type system (open/close by pressing).
The air flow can be adjusted by mounting an air control damper **OBD** on the diffuser inlet.

Accessories
Air control damper with opposable blades **OBD.**
Settlement frame **CC** made of galvanized steel sheet.
Insulated/Non-insulated adapter **ADP IZ/N.**

Materials and finishing
Extruded aluminum electrostatic field painted white RAL 9016.
Other RAL colors available on request.
Natural anodised aluminum.

Technical design

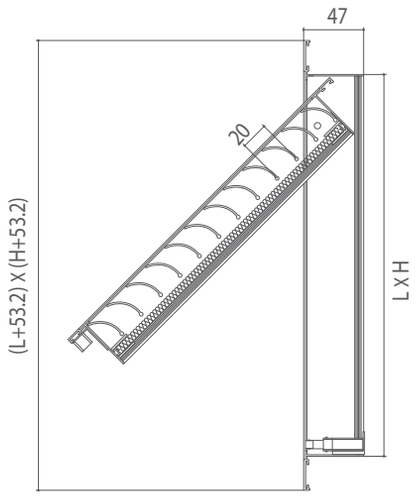

Assembly Method
Mounting with screws on the visible frame (standard)
Mounting with screws on the inlet connection of the grille (optional).

Selection table SD/SDD

Air flow	L x H	200 x 100	300 x 150	400 x 200	300 x 300	500 x 300	600 x 300	800 x 300	600 x 600	1000 x 600
(m^3/h)	Ak [m^2]	0.0076	0.0189	0.0345	0.0416	0.0721	0.0915	0.1173	0.1759	0.2934
60	Veff[m/s]	2.2								
	ΔPt [pa]	5.0								
	NR [dB(A)]	22.0								
80	Veff[m/s]	2.9								
	ΔPt [pa]	9.0								
	NR [dB(A)]	29.0								
100	Veff[m/s]	3.7								
	ΔPt [pa]	14.0								
	NR [dB(A)]	35.0								
140	Veff[m/s]	5.1	2.1							
	ΔPt [pa]	27.0	2.0							
	NR [dB(A)]	44.0	16.0							
180	Veff[m/s]	6.6	2.6							
	ΔPt [pa]	45.0	3.0							
	NR [dB(A)]	51.0	22.0							
200	Veff[m/s]	7.3	2.9	1.6						
	ΔPt [pa]	56.0	4.0	3.0						
	NR [dB(A)]	53.0	25.0	22.0						
300	Veff[m/s]		4.4	2.4	2.0					
	ΔPt [pa]		9.0	6.0	2.0					
	NR [dB(A)]		36.0	32.0	22.0					
400	Veff[m/s]		5.9	3.2	2.7					
	ΔPt [pa]		16.0	12.0	4.0					
	NR [dB(A)]		43.0	40.0	30.0					
500	Veff[m/s]		7.3	4.0	3.3	1.9				
	ΔPt [pa]		25.0	18.0	7.0	2.0				
	NR [dB(A)]		49.0	46.0	36.0	24.0				
600	Veff[m/s]				4.0	2.3	1.8	1.4		
	ΔPt [pa]				11.0	3.0	2.0	1.0		
	NR [dB(A)]				41.0	29.0	24.0	18.0		
800	Veff[m/s]				5.3	3.1	2.4	1.9		
	ΔPt [pa]				19.0	6.0	4.0	2.0		
	NR [dB(A)]				48.0	36.0	32.0	26.0		
1000	Veff[m/s]				6.7	3.9	3.0	2.4	1.6	
	ΔPt [pa]				30.0	10.0	6.0	4.0	1.0	
	NR [dB(A)]				54.0	42.0	38.0	32.0	21.0	
1400	Veff[m/s]					5.4	4.3	3.3	2.2	
	ΔPt [pa]					20.0	13.0	7.0	2.0	
	NR [dB(A)]					51.0	46.0	40.0	29.0	
1800	Veff[m/s]						5.5	4.3	2.8	
	ΔPt [pa]						22.0	12.0	4.0	
	NR [dB(A)]						53.0	47.0	36.0	
2000	Veff[m/s]							4.7	3.2	
	ΔPt [pa]							15.0	5.0	
	NR [dB(A)]							50.0	39.0	
3000	Veff[m/s]								4.7	2.8
	ΔPt [pa]								13.0	1.0
	NR [dB(A)]								49.0	22.0
4000	Veff[m/s]									3.8
	ΔPt [pa]									1.0
	NR [dB(A)]									30.0

NR < 25 | 25≤NR≤35 | NR>35

Annotation

* Ak [m²] - Free surface
* Veff[m/s] - Air velocity inside the grille
* Δ Pt [pa] - Pressure loss
* NR [dB(A)] - Noise level without the room attenuation

Order codes

Type + **FIL** + **OBD** + **CC** + **ADP IZ/N** / **Dimensions** / **L x H** / **O**

- **Type**: **SD** **SDD**
- **FIL**: Air filter (for SD)
- **OBD**: Air control damper
- **CC**: Settlement frame
- **ADP IZ/N**: Insulated/Non-insulated adapter
- **Dimensions**: **L x H** 200 x 100, 300 x 150, 400 x 200, 300 x 300, 500 x 300, 600 x 300, 800 x 300, 600 x 600, 1000 x 600
- **L x H**: Other dimensions on request
- **O**: **0** Painted white RAL 9016; **R** Other RAL paints; Natural anodised