
Rectangular Fire Damper SFD

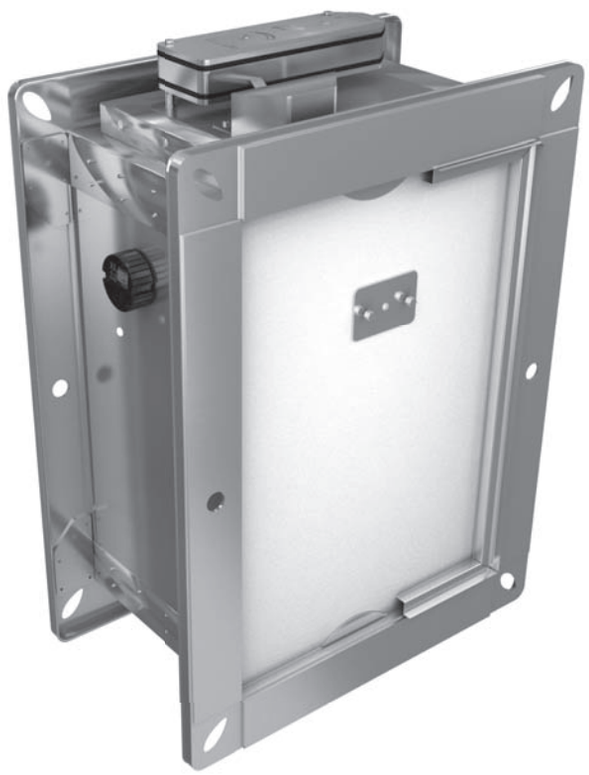


Description
Rectangular fireproof damper designed for automatic isolation of ventilation and air conditioning systems compartments.
Suitable for mounting into concrete walls and ceilings.


Application
For closing and sealing the ventilation ducts in case of fire.

Characteristics
Drive system with fusible element.
Automatic closing fire damper fusible element is determined to be active at temperatures> 72 ° C.
Various classes of fire resistance (RF60, RF90, RF120).
Optional contact signal for start/ end of the cycle.
Alternatively, an electric actuator can be used.

Materials and finishing
Galvanized sheet steel case
Special insulated damper blade

Technical design



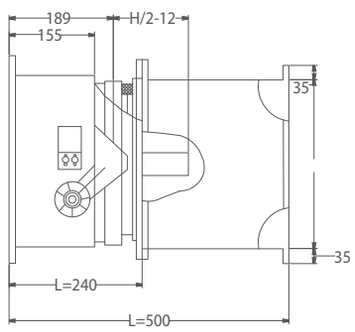

Selection table SFD

Veff (m/s)	H (mm) / B=400 (mm)	200	250	300	350	400	450	500	600	700	800
2.0	NR [db(A)]	33.00	31.00	28.00	27.00	26.00	25.00	25.50	25.00	24.50	24.00
	ΔPt[pa]	18.00	8.50	6.00	4.50	3.80	3.10	2.80	2.20	1.90	1.70
2.5	NR [db(A)]	38.00	34.00	33.00	32.50	31.50	31.00	30.50	30.00	29.50	29.00
	ΔPt[pa]	28.00	14.00	9.20	7.00	5.80	4.80	4.20	3.50	2.90	2.70
3.0	NR [db(A)]	42.50	40.00	38.00	36.80	36.00	35.80	35.50	35.00	34.50	34.00
	ΔPt[pa]	40.00	19.00	14.00	10.00	8.00	7.00	6.00	5.00	4.30	3.80
5.0	NR [db(A)]	53.00	51.80	50.70	49.00	48.00	47.80	47.20	46.80	46.70	46.50
	ΔPt[pa]	110.00	55.00	38.00	28.00	22.00	19.50	17.00	14.00	12.00	11.00
7.0	NR [db(A)]	61.00	58.00	57.20	56.70	56.50	56.10	55.90	55.70	55.20	55.00
	ΔPt[pa]	150.00	110.00	70.00	55.00	45.00	38.00	32.00	28.00	22.00	20.00

Aerodynamic and acoustic corrections based on other lengths of multispot B												
B(mm)	200	250	300	350	400/450	500	600	700/800	900	1000/1100	1200-1400	1500
ΔPt	1.7	1.5	1.3	1.1	1.1	0.9	0.8	0.7	0.6	0.6	0.6	0.5
NR	-1	-1	0	0	0	0	1	2	2	3	4	5

ΔPt [pa] = Correction coefficient x Δ Pt (B=400 mm)
NR[dB(A)] = Correction coefficient + NR (B=400 mm)

Annotation

* Veff[m/s] - Air velocity in damper
* ΔPt [pa] - Pressure loss
* NR [dB(A)] - Noise level without the room attenuation

Order codes

Type	/	Dimensions	
		B	H
SFD		200	200
		250	250
		300	300
		350	350
		400	400
		450	450
		500	500
		600	600
		700	700
		800	800
		900	
		1000	
		1100	
		1200	
		1300	
		1400	
		1500	