
Special Jet Diffuser SJD

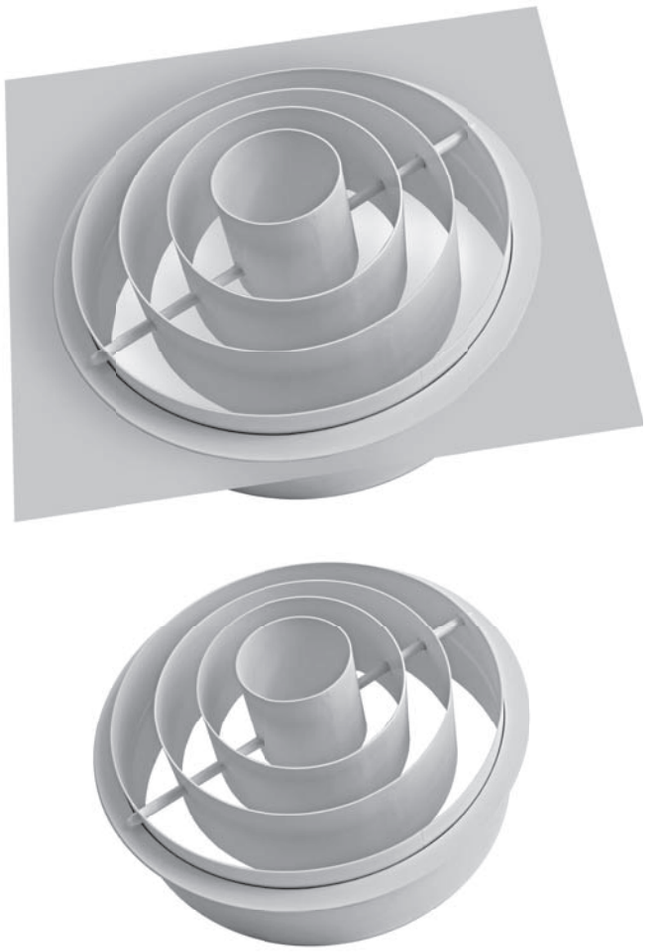

Description
Diffuser with long range air supply capacity. Ideal for use in traffic areas, theaters, discos, museums, concert halls, etc.


Application
Air supply

Characteristics
Concentric nozzles that allow airflow direction in the desired areas.
Rectangular or circular air duct mounting.
Mounting holes on flange.
Horizontal and vertical 360° rotation.
Produced in an assembly of 1, 2, 3, 4 pieces.
Manually adjustable.

Accessories
Insulated/ Non-insulated adapter **ADP IZ/N.**

Materials and finishing
Aluminum nozzles and galvanized steel sheet connection, electrostatic field painted white RAL 9016.
Other RAL colors available on request.

Technical design

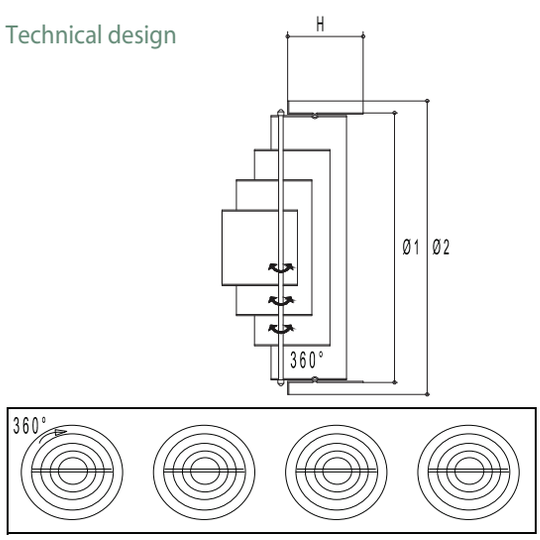

Ø1	Ø2	H
200	240	100
250	290	
300	340	
350	390	

Assembly Methods
Standard assembly with screws.

Selection table SJD

Air flow	ø	200				250				300				350			
(m^3/h)	Elements no.	1	2	3	4	1	2	3	4	1	2	3	4	1	2	3	4
342	NR [dB(A)]	—															
	△Pt [pa]	15.0															
	X [m]	8															
504	NR [dB(A)]	25															
	△Pt [pa]	35.0															
	X [m]	9															
684	NR [dB(A)]	31	—														
	△Pt [pa]	60	15														
	X [m]	12	8														
828	NR [dB(A)]	39	22			—				—							
	△Pt [pa]	90	25			30				15							
	X [m]	15	9			12				11							
1008	NR [dB(A)]	43	23			29				—							
	△Pt [pa]	125	35			45				25							
	X [m]	18	11			15				14							
1512	NR [dB(A)]		40	29	22	41	—			34	22						
	△Pt [pa]		75	35	20	95	30			50	15						
	X [m]		15	12	9	21	12			18	11						
2052	NR [dB(A)]		45	37	31	48	32	—		42	24	—		35	—		
	△Pt [pa]		125	60	35	190	50	20		90	25	10		45	10		
	X [m]		21	15	12	28	15	12		24	14	11		20	12		
3060	NR [dB(A)]			48	43		46	31	—	52	38	25		46	29	—	
	△Pt [pa]			125	75		95	45	30	200	50	25		115	25	19	
	X [m]			23	17		24	17	14	37	21	15		30	18	12	
3744	NR [dB(A)]			53	47		52	40	31		44	31	27	52	38	24	
	△Pt [pa]			190	105		145	65	40		75	35	20	150	40	20	
	X [m]			28	21		29	21	17		26	18	14	37	21	15	
4428	NR [dB(A)]				52		57	45	38		47	39	30	57	43	29	—
	△Pt [pa]				150		200	90	50		105	50	25	200	55	25	15
	X [m]				24		34	24	18		29	21	17	43	26	18	15
5940	NR [dB(A)]				58			54	46		55	46	39		49	40	32
	△Pt [pa]				275			155	90		190	80	40		100	45	25
	X [m]				32			32	24		37	28	21		34	24	18
7632	NR [dB(A)]							61	53			51	48		55	47	40
	△Pt [pa]							250	150			140	80		155	60	40
	X [m]							40	32			35	28		40	32	24
10260	NR [dB(A)]								62			57	54		65	53	49
	△Pt [pa]								250			250	145		250	125	70
	X [m]								43			49	37		58	41	32
13608	NR [dB(A)]												61			63	56
	△Pt [pa]												250			210	125
	X [m]												55			55	43

Annotation

* X [m] - Air flow length for Vk=0.25m/s speed
* ΔPt [pa] - Pressure loss
* NR [dB(A)] - Noise level for 8dB room attenuation

Note: The values in the table are for ΔT = + 10 K.

Order codes

Type	/	Dimensions	/	O
SJD		200 250 300 350		**0** Painted white RAL 9016 **R** Other RAL paints