
# 4 Direction Slot Diffuser SL

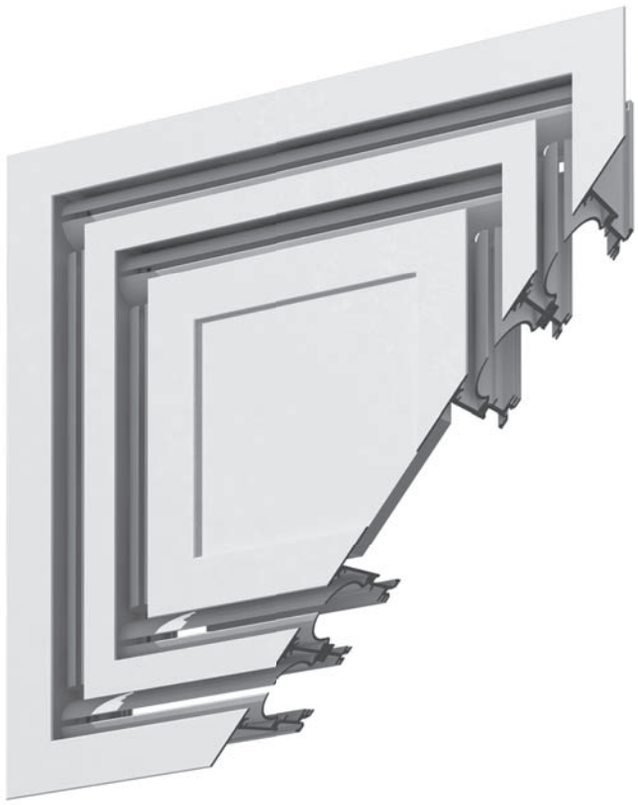

## Description
Air diffuser specially designed for paneled ceiling mounting.


## Application
Supply/ exhaust of the airflow

## Characteristics
The diffuser is designed with two slots perimetrically located around a square center of plasterboard or other material, keeping a uniform aspect with the rest of the ceiling.
Inside each slot there are individually adjustable twin blades mounted, which allows adjustment of air flow passing through each slot.
The blades inside the slot can be painted differently from the diffuser, thus giving a decorative look.

## Accessories
Insulated/Non-insulated adapter **ADP IZ/N.**

## Materials and finishing
Extruded aluminum blades, electrostatic field painted white RAL 9016.
Other RAL colors available on request.

## Technical design

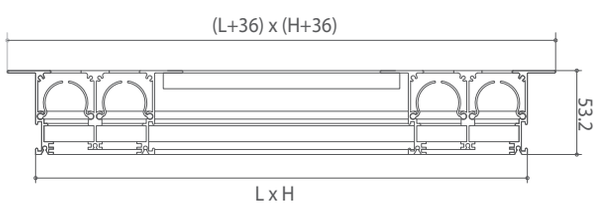


## Assembly Methods
Paneled ceiling 600 x 600 mm (standard)

## Selection table SL

| Air flow ($m^3/h$) | 595 x 595 | |
|---|---|---|
| | Ak (mp) | 0.076 |
| **86** | X [m] (Horizontal)<br>X [m] (Vertical)<br>NR [dB(A)]<br>ΔPt [pa] | 4.00<br>3.00<br>---<br>4.02 |
| **176** | X [m] (Horizontal)<br>X [m] (Vertical)<br>NR [dB(A)]<br>ΔPt [pa] | 5.00<br>4.00<br>18.00<br>7.94 |
| **219** | X [m] (Horizontal)<br>X [m] (Vertical)<br>NR [dB(A)]<br>ΔPt [pa] | 8.00<br>7.00<br>30.00<br>22.16 |
| **262** | X [m] (Horizontal)<br>X [m] (Vertical)<br>NR [dB(A)]<br>ΔPt [pa] | 9.00<br>7.00<br>34.00<br>31.00 |
| **305** | X [m] (Horizontal)<br>X [m] (Vertical)<br>NR [dB(A)]<br>ΔPt [pa] | 10.00<br>8.00<br>38.00<br>43.00 |
| **352** | X [m] (Horizontal)<br>X [m] (Vertical)<br>NR [dB(A)]<br>ΔPt [pa] | 10.00<br>9.00<br>41.00<br>56.00 |
| **395** | X [m] (Horizontal)<br>X [m] (Vertical)<br>NR [dB(A)]<br>ΔPt [pa] | 11.00<br>9.00<br>44.00<br>72.00 |
| **485** | X [m] (Horizontal)<br>X [m] (Vertical)<br>NR [dB(A)]<br>ΔPt [pa] | 12.00<br>10.00<br>47.00<br>73.00 |
| **552** | X [m] (Horizontal)<br>X [m] (Vertical)<br>NR [dB(A)]<br>ΔPt [pa] | 12.50<br>10.50<br>48.00<br>73.50 |
| **625** | X [m] (Horizontal)<br>X [m] (Vertical)<br>NR [dB(A)]<br>ΔPt [pa] | 12.80<br>11.00<br>50.00<br>74.00 |
| **850** | X [m] (Horizontal)<br>X [m] (Vertical)<br>NR [dB(A)]<br>ΔPt [pa] | 13.50<br>12.00<br>52.00<br>92.00 |

## Annotation

* Ak [m²] - Free surface of the diffuser
* X [m] - Length airflow
* NR [dB(A)] - Noise level without the room attenuation
* ΔPt [pa] - Pressure loss inside diffuser

## Order codes

**Type** + **ADP IZ/N** / **Dimensions** / **L X H** / **O**

- **Type**: **SL**
- **ADP IZ/N**: Insulated/Non-insulated adapter
- **Dimensions**: **L X H** — 595 x 595
- **L X H**: Other dimensions on request
- **O**: **0** Painted white RAL 9016; **R** Other RAL paints