Linear Slot Diffuser SLOT





Description
Linear aluminum diffuser with adjustable blades.

Application
Supply/ exhaust of the airflow


Characteristics
Recommended for rooms between 2.60 to 4.00 meters in height.
The recommended temperature difference between supplied air and indoor air is ± 10 K.
Long run diffusers are made of assembled modules (maximum 3 meters full length). In this case the product is delivered with joining elements between modules.
Blades are used for air flow control.
On request, the diffuser can be made perimetral.

Accessories
Insulated/Non-insulated adapter **ADP IZ/N**
Attachment spring **A**

Materials and finishing
Extruded aluminum, electrostatic field painted white RAL 9016.
Other RAL colors available on request.
Anodised aluminium

Assembly Methods
Attachment spring.

Technical design

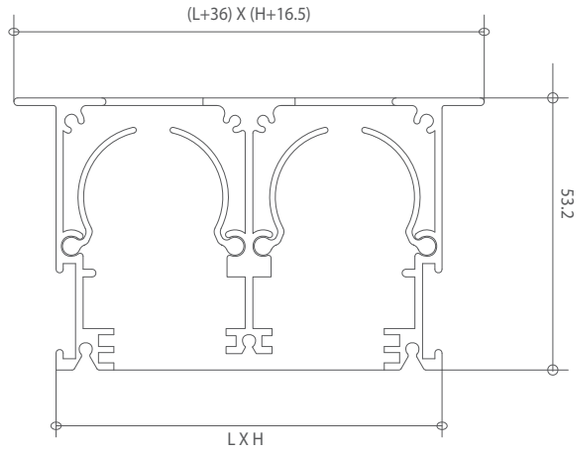

No. of slots	H interior (height) slot = 19 mm	H interior (height) slot = 25 mm
1	40	45
2	76	88
3	112	130
4	149	174
5	186	216
6	223	260
7	260	304
8	297	348

Selection table SLOT 19 mm

Air flow (m^3/h)	No. of slots Ak (mp)	1 0.019
Length = 1000 mm		
33	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	1.00 1.00 - 0.98
67	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	2.00 2.00 - 4.02
106	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	4.00 3.00 15.00 9.22
140	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	5.00 4.00 21.00 16.18
173	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	5.00 4.00 27.00 25.40
206	X [m] (Horizontal X [m] (Vertical) NR [dB(A)] △Pt [pa]	6.00 5.00 31.00 36.38
240	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	7.00 5.00 35.00 49.52
279	X [m] (Horizontal) X[m] (Vertical) NR [dB(A)] △Pt [pa]	7.00 5.00 38.00 64.72
312	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	8.00 5.00 41.00 82.18

Air flow (m^3/h)	No. of slots Ak (mp)	2 0.038
Length = 1000 mm		
67	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	1.00 1.00 - 0.98
140	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	3.00 3.00 - 4.02
206	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	5.00 4.00 18.00 9.22
279	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	7.00 5.00 24.00 16.18
346	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	8.00 6.00 30.00 25.40
413	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	9.00 6.00 34.00 36.38
485	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	9.00 7.00 38.00 49.52
552	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	10.00 7.00 41.00 64.72
625	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	11.00 8.00 44.00 82.18

Air flow (m^3/h)	No. of slots Ak (mp)	3 0.057
Length = 1000 mm		
106	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	2.00 2.00 - 0.98
206	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	4.00 3.00 - 4.02
312	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	6.00 5.00 19.00 9.22
413	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	8.00 6.00 26.00 16.18
519	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	10.00 7.00 32.00 25.40
625	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	11.00 8.00 36.00 36.38
725	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	12.00 9.00 40.00 49.52
831	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	12.00 9.00 43.00 64.72
932	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	13.00 10.00 46.00 82.18

Air flow (m^3/h)	No. of slots Ak (mp)	4 0.076
Length = 1000 mm		
140	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	2.00 2.00 - 0.98
279	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	5.00 4.00 - 4.02
413	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	7.00 6.00 21.00 9.22
552	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	10.00 7.00 27.00 16.18
692	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	11.00 8.00 33.00 25.40
831	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	12.00 9.00 37.00 36.38
971	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	13.00 10.00 41.00 49.52
1105	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	14.00 10.00 44.00 64.72
1244	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	15.00 11.00 47.00 82.18

Air flow (m^3/h)	No. of slots Ak (mp)	5 0.095
Length = 1000 mm		
173	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	2.00 2.00 - 0.98
346	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	5.00 4.00 - 4.02
519	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	8.00 6.00 22.00 9.22
692	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	11.00 8.00 28.00 16.18
865	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	12.00 9.00 34.00 25.40
1038	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	14.00 10.00 38.00 36.38
1211	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	15.00 11.00 42.00 49.52
1384	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	16.00 12.00 45.00 64.72
1557	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	17.00 12.00 48.00 82.18

Air flow (m^3/h)	No. of slots Ak (mp)	6 0.114
Length = 1000 mm		
206	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	3.00 2.00 - 0.98
413	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	6.00 5.00 - 4.02
625	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	9.00 7.00 22.00 9.22
831	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	12.00 9.00 29.00 16.18
1038	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	14.00 10.00 35.00 25.40
1244	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	15.00 11.00 39.00 36.38
1451	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	16.00 12.00 43.00 49.52
1663	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	17.00 13.00 46.00 64.72
1869	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	18.00 14.00 49.00 82.18

Selection table SLOT 25 mm

Air flow (m^3/h)	No. of slots Ak (mp)	1 0.025
Length = 1000 mm		
39	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	1.00 1.00 - 0.98
73	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	2.00 2.00 1.00 3.53
112	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	4.00 4.00 14.00 7.94
145	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	5.00 4.00 21.00 14.22
184	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	6.00 5.00 27.00 22.16
223	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	6.00 5.00 31.00 31.87
257	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	7.00 5.00 35.00 43.34
296	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	7.00 6.00 38.00 56.78
329	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	8.00 6.00 41.00 71.78

Air flow (m^3/h)	No. of slots Ak (mp)	2 0.05
Length = 1000 mm		
73	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	1.00 2.00 - 0.98
145	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	4.00 3.00 - 3.53
223	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	5.00 5.00 17.00 7.94
296	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	7.00 6.00 24.00 14.22
368	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	8.00 7.00 30.00 22.16
441	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	9.00 7.00 34.00 31.87
513	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	10.00 8.00 38.00 43.34
591	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	10.00 9.00 41.00 56.78
664	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	11.00 9.00 44.00 71.78

Air flow (m^3/h)	No. of slots Ak (mp)	3 0.075
Length= 1000 mm		
112	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	2.00 2.00 - 0.98
223	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	4.00 4.00 - 3.53
329	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	6.00 6.00 19.00 7.94
441	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	9.00 7.00 26.00 14.22
552	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	10.00 8.00 31.00 22.16
664	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	11.00 9.00 36.00 31.87
776	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	12.00 10.00 40.00 43.34
882	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	13.00 10.00 43.00 56.78
993	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	13.00 11.00 46.00 71.78

Air flow (m^3/h)	No. of slots Ak (mp)	4 0.1
Length = 1000 mm		
145	X[m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	2.00 2.00 - 0.98
296	X[m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	5.00 5.00 - 3.53
441	X[m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	7.00 7.00 20.00 7.94
591	X[m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	10.00 9.00 27.00 14.22
737	X[m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	12.00 9.00 33.00 22.16
882	X[m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	13.00 10.00 37.00 31.87
1032	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	14.00 11.00 41.00 43.34
1177	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	15.00 12.00 44.00 56.78
1328	X [m] (Orizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	16.00 13.00 47.00 71.78

Air flow (m^3/h)	No. of slots Ak (mp)	5 0.125
Length = 1000 mm		
184	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	2.00 3.00 - 0.98
368	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	5.00 5.00 - 3.53
552	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	8.00 8.00 21.00 7.94
737	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	11.00 9.00 28.00 14.22
921	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	13.00 10.00 34.00 22.16
1105	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	14.00 12.00 38.00 31.87
1289	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	15.00 12.00 42.00 43.34
1473	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	16.00 13.00 45.00 56.78
1657	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	17.00 14.00 48.00 71.78

Air flow (m^3/h)	No. of slots Ak (mp)	6 0.15
Length = 1000 mm		
223	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	3.00 3.00 - 0.98
441	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	6.00 6.00 - 3.53
664	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	9.00 9.00 22.00 7.94
882	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	12.00 10.00 29.00 14.22
1105	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	14.00 12.00 34.00 22.16
1328	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	16.00 12.00 39.00 31.87
1546	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	17.00 14.00 43.00 43.34
1769	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	18.00 15.00 46.00 56.78
1986	X [m] (Horizontal) X [m] (Vertical) NR [dB(A)] △Pt [pa]	19.00 16.00 48.00 71.78

Annotation

* Ak [m²] - Free surface
* X [m] - Air jet length
* NR [dB(A)] - Noise level without the room attenuation
* ΔPt [pa] - Pressure loss

Order codes

Type - No. of slots + **ADP IZ/N** + **A** (Attachment spring) / **Dimensions** / **Blades color** / **O**

- **Type - No. of slots**
  - SLOT
  - 1…..8 slots
- **ADP IZ/N**
  - Insulated/Non-insulated adapter
- **A** (Attachment spring)
  - No. of springs depending on length and no. of slots
- **Dimensions**
  - L (length) on request
- **Blades color**
  - Same as the frame
  - Black RAL 9005
- **O**
  - **0** Painted white RAL 9016
  - **R** Other RAL paints
  - Natural anodised