Linear Disc Diffuser SP 2 / SP 3



SP3

Description
Aluminium linear diffuser provided with aerodynamic shaped discs.

Application
Airflow supply.


Characteristics
Depending on the technical and architectural requirements, the diffuser is provided with 2 or 3 parallel rows of discs **SP2/ SP3**
Each disk can be rotated at 360 degrees, providing unlimited possibilities to diffuse the air, without affecting the air flow, pressure loss or noise level.
Discs are available in two colors: white RAL 9016 and black RAL 9005
Long run diffusers are made out of assembled modules (maximum 3 m full length). In this case the product is delivered with joining elements between modules.
Diffuser recommended for constant or variable air flow.

Accessories
Attachment spring **A**
Insulated/ Non-insulated adapter **ADP IZ/N**


Materials and finishing
Extruded aluminum material, electrostatic field painted white RAL 9016
Other RAL colors available on request
Natural/ black anodised aluminum
Polypropylene discs.

Technical design

SP 2

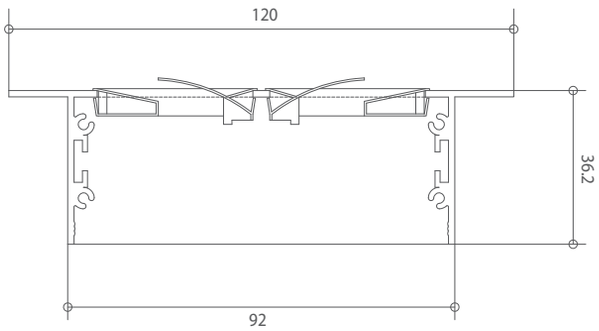

SP 3

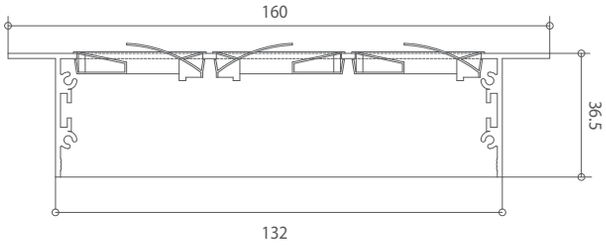

Assembly Method
Attachment spring

Selection table SP 2, SP 3

SP2-900

Air flow (m^3/h)	Length Vk[m/s]	900 0.2
105	X [m] NR [dB(A)] △Pt [pa]	6.5 20.0 50.0
125	X [m] NR [dB(A)] △Pt [pa]	7.5 25.0 75.0
150	X [m] NR [dB(A)] △Pt [pa]	9.5 30.0 100.0
180	X [m] NR [dB(A)] △Pt [pa]	12.0 35.0 150.0
210	X [m] NR [dB(A)] △Pt [pa]	14.0 40.0 200.0

SP2-1500

Air flow (m^3/h)	Length Vk[m/s]	1500 0.2
190	X [m] NR [dB(A)] △Pt [pa]	8.0 20.0 40.0
240	X [m] NR [dB(A)] △Pt [pa]	10.0 27.0 75.0
270	X [m] NR [dB(A)] △Pt [pa]	12.0 30.0 90.0
320	X [m] NR [dB(A)] △Pt [pa]	14.0 35.0 130.0
380	X [m] NR [dB(A)] △Pt [pa]	17.0 40.0 180.0

SP3-900

Air flow (m^3/h)	Length Vk[m/s]	900 0.2
110	X [m] NR [dB(A)] △Pt [pa]	5.5 22 50
130	X [m] NR [dB(A)] △Pt [pa]	6.5 27 75
160	X [m] NR [dB(A)] △Pt [pa]	8 32 110
190	X [m] NR [dB(A)] △Pt [pa]	9.5 37 175
230	X [m] NR [dB(A)] △Pt [pa]	12 42 225

SP3-1500

Air flow (m^3/h)	Length Vk[m/s]	1500 0.2
270	X [m] NR [dB(A)] △Pt [pa]	9.5 20.0 40.0
340	X [m] NR [dB(A)] △Pt [pa]	12 27 70
400	X [m] NR [dB(A)] △Pt [pa]	14 32 85
470	X [m] NR [dB(A)] △Pt [pa]	16 37 120
520	X [m] NR [dB(A)] △Pt [pa]	18 38 150

Annotation

* Vk [m/s] - Speed at which airflow length was calculated "x" [m]
* X [m] - Airflow length
* NR [dB(A)] - Noise level without room attenuation
* ΔPt [pa] - Pressure loss inside diffuser

Order codes

Type + **ADP IZ/N** + **A** (Attachment spring) / **Dimensions** / **Discs colour** / **O**

- **Type**: **SP2**, **SP3**
- **ADP IZ/N**: Insulated/non-insulated adapter
- **A** (Attachment spring): No of springs depending on grille dimensions
- **Dimensions**: L (length) on request
- **Discs colour**: White RAL 9016, Black RAL 9005
- **O**: **0** Painted white RAL 9016; **R** Painted RAL…; Natural/black anodised