Swirl Jet Diffuser SS



Description
Rectangular swirl jet diffuser suitable for paneled ceiling mounting.


Application
Supply /exhaust of the air flow

Characteristics
Recommended for rooms between 2.60 to 4.00 m. in height
The design, radial layout and vortex action of the blades leads to a high level of induction rate.
The recommended temperature difference between supplied air and indoor air is ± 10 K.
The blades that guide the air jet are plastic white RAL 9016 or black RAL 9005.
The diffuser is supplied with gasket seals, fastening screw and plastic cover for concealment.

Accessories
Insulated/Non-insulated adapter **ADP IZ/N.**

Materials and finishing
Pickled steel sheet electrostatic field painted white RAL 9016.
Other RAL colors available on request.
Polypropylene blades.

Technical design

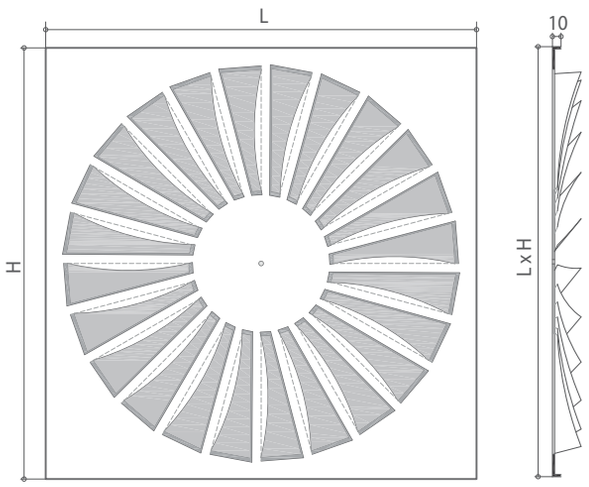

Assembly Methods
Paneled ceiling 600 x 600 mm mounting, fitted with a central screw M6 x 100 mm on the mounting traverse of the adapter.

Selection table SS

Air flow (m^3/h)	Dimensions	595x595	
	Ak [m^2]	0.0440	
	Vk[m/s]	0.3	0.5
360	Veff [m/s]	2.27	2.27
	X [m]	1.9	-
	NR [dB(A)]	<20	<20
	△Pt [pa]	8.0	8.0
450	Veff [m/s]	2.84	2.84
	X [m]	2.3	1.4
	NR [dB(A)]	22.0	22.0
	△Pt [pa]	12.0	12.0
540	Veff [m/s]	3.41	3.41
	X [m]	2.8	1.7
	NR [dB(A)]	30.0	30.0
	△Pt [pa]	17.0	17.0
648	Veff [m/s]	4.09	4.09
	X [m]	3.3	2.0
	NR [dB(A)]	36.0	36.0
	△Pt [pa]	24.0	24.0
720	Veff [m/s]	4.55	4.55
	X [m]	3.7	2.2
	NR [dB(A)]	39.0	39.0
	△Pt [pa]	30.0	30.0
900	Veff [m/s]	5.68	5.68
	X [m]	4.6	2.8
	NR [dB(A)]	46.0	46.0
	△Pt [pa]	47.0	47.0

Annotation

* Ak [m^2] - Free surface
* Vk - Velocity at which the air jet length was calculated "x" [m]
* Veff[m/s] - Air velocity inside diffuser
* X [m] - Air jet length
* NR [dB(A)] - Noise level without the room attenuation
* ΔPt [pa] - Pressure loss

Order codes

Type	+	ADP IZ/N	/	Dimensions	/	Control blades	/	0
SS		Insulated/ Non-insulated adapter		L x H 595*595		White RAL 9016 Black RAL 9005		**0** Painted white RAL **R** Other RAL paints