Circular Valve SV



Description
Circular steel valve with adjustable central cone for supply of the air, provided with mounting frame **SV**.


Application
Supply the airflow

Characteristics
Valve is provided with gasket seal and mounting frame
The adjustable center cone allows adjustment of air flow
The mounting frame is provided with holes for fixing.

Materials and finishing
Steel electrostatic field painted in RAL9016 white
Other RAL colors available on request.
Mounting frame made of galvanized metal sheet

Assembly Methods
Screws on the mounting frame

Technical design

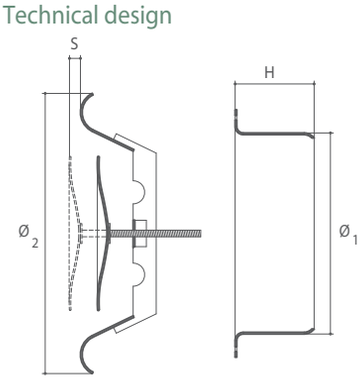

Tip	Ø1	Ø2	H
SV	100	140	48
	125	165	48
	150	200	44
	160	210	50
	200	250	45

Selection table SV

Air flow (m^3/h)	Dimension (mm)	100			125				160					200			
	S(mm)	4	9	12	3	7	12	15	4	9	12	15	20	9	12	15	20
20	X [m]	0.65			0.6												
	NR [dB(A)]	<10			<25												
	△Pt [pa]	15.0			20.0												
30	X [m]	1.0			0.8												
	NR [dB(A)]	<10			<25												
	△Pt [pa]	28.0			37.0												
50	X [m]	2.0	0.8	0.8	1.5	1.3			1.4								
	NR [dB(A)]	32.0	<30	<25	30.0	<25			<25								
	△Pt [pa]	83.0	20.0	5.0	105.0	25.0			38.0								
70	X [m]	2.8	1.7	1.3	2.2	1.7	1.1		2.0	1.3							
	NR [dB(A)]	>35	30.0	<30	>35	<25	<25		25.0	<25							
	△Pt [pa]	130.0	32.0	20.0	190.0	40.0	15.0		70.0	15.0							
100	X [m]		2.5	1.8		2.5	1.6	1.2	3.0	1.9	1.5	1.4		2.2	1.5		
	NR [dB(A)]		>35	40.0		30.0	<25	<25	32.0	<25	<25	<25		<25	<25		
	△Pt [pa]		75.0	40.0		80.0	30.0	22.0	145.0	35.0	20.0	13.0		20.0	12.0		
150	X [m]		>3	>3		>3	2.5	2.0		3.0	2.2	2.0	1.5	3.1	2.2	1.8	1.2
	NR [dB(A)]		>35	>40		>35	37.0	35.0		33.0	<25	<25	<25	<25	23.0	<25	<25
	△Pt [pa]		160.0	100.0		180.0	68.0	48.0		72.0	43.0	28.0	18.0	43.0	25.0	15.0	10.0
200	X [m]		>3	>3		>3	>3	2.9		>4	3.5	2.9	2.2	4.7	3.1	2.6	2.2
	NR [dB(A)]		>35	>40		>35	>35	40.0		40.0	35.0	30.0	<30	35.0	30.0	<25	<25
	△Pt [pa]		280.0	155.0		300.0	120.0	70.0		125.0	73.0	48.0	30.0	70.0	48.0	27.0	18.0
250	X [m]									>4	>4	3.9	3.0	>5	4.0	3.6	3.0
	NR [dB(A)]									>40	40.0	35.0	33.0	40.0	37.0	30.0	<25
	△Pt [pa]									195.0	125.0	68.0	45.0	100.0	78.0	40.0	25.0
300	X [m]											>4	3.8	>5	4.8	4.2	3.5
	NR [dB(A)]											40.0	38.0	>40	45.0	36.0	30.0
	△Pt [pa]											100.0	65.0	150.0	120.0	60.0	35.0
500	X [m]															>5	>5
	NR [dB(A)]															>40	42.0
	△Pt [pa]															180.0	100.0
700	X [m]																>5
	NR [dB(A)]																>40
	△Pt [pa]																160.0

Annotation

* S [mm] - Disk opening
* X [m] - Air jet length at the velocity Vk = 0.2 m/s
* ΔPt [pa] - Pressure loss
* NR [dB(A)] - Noise level without the room attenuation

Order codes

Type	/	Diameter	/	O
SV		100 125 150 160 200		**0** Painted white RAL 9016 **R** Other RAL paints