Transfer Grille TG / TGS



TG

Description
Aluminum transfer grille for door mounting **TG/TGS**.


Application
Designed to allow air transfer and pressure equalization between rooms

Characteristics
Grid transfer is provided with "V"-shaped blades with no opposite visibility.
TG is used for doors with thickness of 40-50 mm, and **TGS** for doors with thickness of 20 mm.
The standard version of this product is provided with mounting holes.


Materials and finishing
Extruded aluminum, electrostatic field painted white RAL 9016.
Other RAL colors available on request.
Natural anodised aluminum.

Technical design

TG

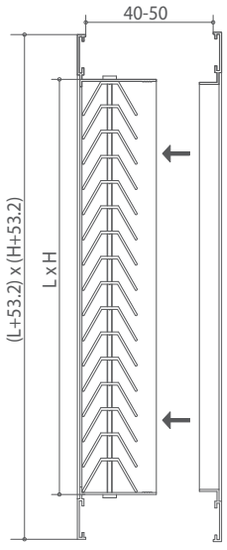

TGS

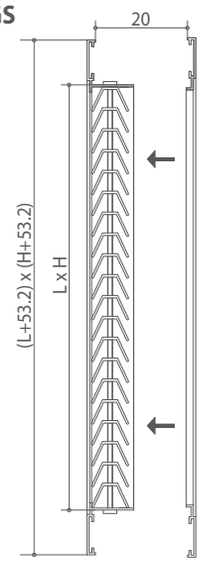

Assembly Method
Standard mounting, with screws.

Selection table TG

Air flow (m^3/h)	L x H	200 X 100	300 X 100	400 X 200	300 X 300	400 X 300	500 X 300	600 X 300	600 X 400
	Ak [m^2]	0.0099	0.0245	0.0447	0.0507	0.0681	0.0856	0.1031	0.138
50	Veff[m/s] NR [dB(A)] ΔPt [Pa]	1.4 30.0 10.0							
60	Veff[m/s] NR [dB(A)] ΔPt [Pa]	1.7 35.0 14.0	0.7 13.0 2.0						
70	Veff[m/s] NR [dB(A)] ΔPt [Pa]	2.0 39.0 19.0	0.8 16.0 3.0						
80	Veff[m/s] NR [dB(A)] ΔPt [Pa]	2.2 42.0 24.0	0.9 20.0 4.0						
90	Veff[m/s] NR [dB(A)] ΔPt [Pa]	2.5 45.0 31.0	1.0 23.0 5.0	0.6 8.0 2.0					
100	Veff[m/s] NR [dB(A)] ΔPt [Pa]	2.8 48.0 38.0	1.1 25.0 6.0	0.6 10.0 2.0					
120	Veff[m/s] NR [dB(A)] ΔPt [Pa]	3.4 52.0 55.0	1.4 30.0 9.0	0.7 15.0 3.0	0.7 12.0 2.0				
140	Veff[m/s] NR [dB(A)] ΔPt [Pa]		1.6 34.0 12.0	0.9 19.0 4.0	0.8 16.0 3.0	0.6 8.0 2.0			
160	Veff[m/s] NR [dB(A)] ΔPt [Pa]		1.8 37.0 16.0	1.0 22.0 5.0	0.9 19.0 4.0	0.7 12.0 2.0			
180	Veff[m/s] NR [dB(A)] ΔPt [Pa]		2.0 40.0 20.0	1.1 25.0 6.0	1.0 22.0 5.0	0.7 15.0 3.0	0.6 9.0 2.0		
200	Veff[m/s] NR [dB(A)] ΔPt [Pa]		2.3 43.0 25.0	1.2 28.0 8.0	1.1 25.0 6.0	0.8 17.0 3.0	0.6 12.0 2.0		
250	Veff[m/s] NR [dB(A)] ΔPt [Pa]		2.8 48.0 39.0	1.6 33.0 12.0	1.4 30.0 9.0	1.0 23.0 5.0	0.8 17.0 3.0	0.7 13.0 2.0	
300	Veff[m/s] NR [dB(A)] ΔPt [Pa]		3.4 53.0 57.0	1.9 38.0 17.0	1.6 35.0 13.0	1.2 27.0 7.0	1.0 22.0 5.0	0.8 17.0 3.0	
350	Veff[m/s] NR [dB(A)] ΔPt [Pa]			2.2 42.0 23.0	1.9 38.0 18.0	1.4 31.0 10.0	1.1 26.0 6.0	0.9 21.0 4.0	0.7 14.0 2.0
400	Veff[m/s] NR [dB(A)] ΔPt [Pa]			2.5 45.0 30.0	2.2 42.0 24.0	1.6 34.0 13.0	1.3 29.0 8.0	1.1 24.0 6.0	0.8 17.0 3.0
500	Veff[m/s] NR [dB(A)] ΔPt [Pa]			3.1 50.0 47.0	2.7 47.0 37.0	2.0 40.0 20.0	1.6 34.0 13.0	1.3 30.0 9.0	1.0 23.0 5.0
600	Veff[m/s] NR [dB(A)] ΔPt [Pa]				3.3 52.0 53.0	2.4 45.0 29.0	1.9 39.0 19.0	1.6 34.0 13.0	1.2 27.0 7.0
700	Veff[m/s] NR [dB(A)] ΔPt [Pa]					2.9 48.0 40.0	2.3 43.0 25.0	1.9 38.0 17.0	1.4 31.0 10.0
800	Veff[m/s] NR [dB(A)] ΔPt [Pa]					3.3 52.0 52.0	2.6 46.0 33.0	2.2 41.0 23.0	1.6 34.0 13.0
900	Veff[m/s] NR [dB(A)] ΔPt [Pa]						2.9 49.0 42.0	2.4 44.0 29.0	1.8 37.0 16.0
1000	Veff[m/s] NR [dB(A)] ΔPt [Pa]						3.2 52.0 52.0	2.7 47.0 36.0	2.0 40.0 20.0
1200	Veff[m/s] NR [dB(A)] ΔPt [Pa]							3.2 52.0 51.0	2.4 44.0 29.0
1400	Veff[m/s] NR [dB(A)] ΔPt [Pa]								2.8 48.0 39.0
1600	Veff[m/s] NR [dB(A)] ΔPt [Pa]								3.2 51.0 51.0

Annotation

* Ak [m²] - Free surface of the grille
* Veff[m/s] - Air velocity in grille
* NR [dB(A)] - Noise level without the room attenuation
* ΔPt [pa] - Pressure loss

NR < 35 | 35≤NR≤45 | NR>45

Order codes

Type / **Dimensions** / **L x H** / **O**

Type
TG
TGS

Dimensions
LxH
200 x 100
300 x 150
400 x 200
300 x 300
400 x 300
600 x 200
500 x 300
600 x 300
600 x 400

L x H
Other dimensions on request

O
0 Painted white RAL 9016
R Other RAL paints
Natural anodised