Circular Exterior Grille WPLSR, WPLR



WPLSR

Description
Weatherproof circular aluminum grille. Ensures protection against intrusion of rain, snow, leaves, birds and insects.

Application
Supply/exhaust of the airflow


Characteristics
The grille is equipped with weatherproof blades, wire mesh and countersinking holes for fixing.
The wire mesh is available in multiple sizes (grid: 1.5 x1.5, 6.3 x 6.3 and 10 x 10 mm).

Materials and finishing
Extruded aluminum electrostatic field painted white RAL 9016.
Other RAL colors available on request.


Assembly Method
Standard mounting, with screws.

Technical design

WPLSR

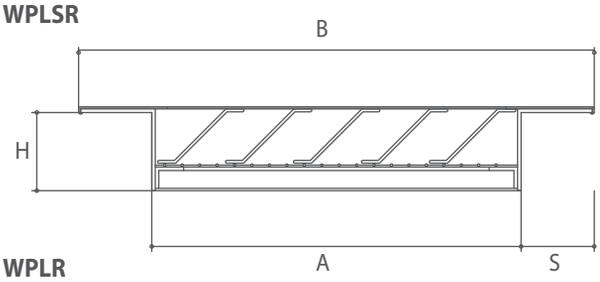

WPLR

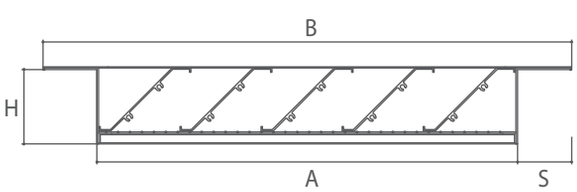

Type	Ø	A	B	S	H	Mesh dimension (mm)
WPLSR	125	121	181	30	33	1.5 x 1.5
	160	156	216	30	33	
	200	196	256	30	33	
	250	246	306	30	33	
	315	295	375	40	33	6.3 x 6.3
	400	380	460	40	33	
	450	430	510	40	33	
	500	480	560	40	33	
	630	610	690	40	33	
	710	690	770	40	33	
WPLR	800	782	882	50	70	10 x 10
	1000	982	1082	50	70	

Selection table WPLSR, WPLR

Air flow	Diameter (mm)	125	160	200	250	315	400	450	500	630	710	800	1000
(m^3/h)	Ak(m^2)	0.006	0.01	0.015	0.024	0.038	0.063	0.08	0.1	0.16	0.2	0.27	0.43
60	Veff [m/s] NR [dB(A)] △Pt [pa]	2.6 34.0 25.0											
100	Veff [m/s] NR [dB(A)] △Pt [pa]	4.3 37.0 29.0	2.8 34.0 27.0	1.9 <20 4.0									
150	Veff [m/s] NR [dB(A)] △Pt [pa]		4.2 40.0 36.0	2.8 34.0 25.0									
200	Veff [m/s] NR [dB(A)] △Pt [pa]			3.7 40.0 40.0	2.3 34.0 18.0	2.0 20.0 9.0							
400	Veff [m/s] NR [dB(A)] △Pt [pa]				4.6 38.0 30.0	2.9 34.0 30.0	1.8 30.0 12.0	1.4 23.0 7.0	1.1 <16 4.0				
700	Veff [m/s] NR [dB(A)] △Pt [pa]					5.1 54.0 97.0	3.1 34.0 34.0	2.4 30.0 20.0	1.9 30.0 12.5	1.2 19.0 5.0			
800	Veff [m/s] NR [dB(A)] △Pt [pa]						3.5 44.0 45.0	2.8 34.0 26.0	2.2 32.0 18.0	1.4 24.0 7.0	1.1 <15 4.0		
1000	Veff [m/s] NR [dB(A)] △Pt [pa]						4.4 50.0 68.0	3.5 45.0 43.0	2.8 34.0 27.0	1.7 29.0 10.0	1.4 22.0 6.0	1.0 <15 1.5	
1600	Veff [m/s] NR [dB(A)] △Pt [pa]								4.4 51.0 70.0	2.8 34.0 25.0	2.2 30.0 14.0	1.6 25.0 4.0	1.0 <15 1.5
2000	Veff [m/s] NR [dB(A)] △Pt [pa]									3.5 45.0 40.0	2.8 34.0 25.0	2.1 30.0 6.0	1.3 22.0 2.5
2500	Veff [m/s] NR [dB(A)] △Pt [pa]									4.3 52.0 63.0	3.5 45.0 36.0	2.6 34.0 9.0	1.6 28.0 3.5
4000	Veff [m/s] NR [dB(A)] △Pt [pa]											4.1 48.0 23.0	2.6 34.0 9.0
6000	Veff [m/s] NR [dB(A)] △Pt [pa]												3.9 48.0 20.0

Annotation

* Ak [m²] - Free surface
* Veff[m/s] - Air velocity inside the grille
* NR [dB(A)] - Noise level
* ΔPt [pa] - Pressure loss

Order codes

Type / **Ø** / **0**

WPLSR
WPLR

WPLSR: 125, 160, 200, 250, 315, 400, 450, 500, 630, 710

WPLR: 800, 1000

0 Painted white RAL 9016
R Other RAL paints